

SWS - STAR WARNING SYSTEMS INC.

WARNING PACKAGES

Packages.....	pg. 1-3
Package Specifications	pg. 4

SWS MOUNTING SOLUTIONS TM

Mounting Brackets & Clamps	pg. 82-86
Mounting Specifications.....	pg. 87

STROBES & 360° LED BEACONS

Bioptic ® & Monoptic	pg. 5
High Profile	pg. 6-8
Medium Profile.....	pg. 8-11
Low Profile	pg. 12-14

ROTATING

High Profile	pg. 15-16
Medium Profile.....	pg. 17

LIGHT BARS

16" Mini Light Bars.....	pg. 18-22
24" Mini Light Bars.....	pg. 23-25
Razor Light Bars	pg. 26-28
Sabre Light Bars	pg. 29-35
Interceptor Light Bars.....	pg. 36-39
Star Light Bars.....	pg. 40-44
Light Bar Mounting	pg. 45-47
Public Address System & Speakers	pg. 48

LED TRAFFIC ARROWS, DIRECTORS & WARNING STICKS

LED Traffic Arrows	pg. 49-56
LED Traffic Directors	pg. 56-57
LED Warning Sticks	pg. 59-60
SLE Warning Sticks	pg. 61

REMOTE LIGHTING SYSTEMS

Power Paks & Remote Strobe Kits	pg. 62
Remote Strobe Heads	pg. 62

AUXILIARY LIGHTING

ULB9.....	pg. 64
DLX3.....	pg. 64
DL15 Series	pg. 65-66
VL22	pg. 66
DL35 Series	pg. 67
GoLight	pg. 68-69
Tractor Lights	pg. 70
735S & 735FI	pg. 70
Barricade Lights	pg. 71
Railroad Lanterns.....	pg. 72-73
LED Vehicle Lighting.....	pg. 74-75

BACK-UP ALARMS

60, 61 & 62 Series.....	pg. 77
99901	pg. 77
63-000	pg. 77

ACCESSORIES

Switch Boxes & Panels	pg. 78
Mounting Boxes.....	pg. 79
Magnets and Kits.....	pg. 80
Strobe Tubes & Bulbs	pg. 81
Product Displays	pg. 88

Contact Page.....	pg. 89
Warranty Policy.....	pg. 90-91
Product Index	pg. 92-98

Star Warning Systems accepts
Visa and Mastercard payments

Industrial & Signal Catalogues
available upon request

005_09/08 Catalogue - product specifications subject to change at manufacturer's discretion



Proudly
Canadian

SWS - STAR WARNING SYSTEMS INC.


Welcome to our new and improved SWS Amber Product Catalogue! Within these pages you will find an array of new products, updates and listings of more model numbers than previously seen.

New products offered by SWS include:

360° LED BEACONS




360° LED MINI BARS

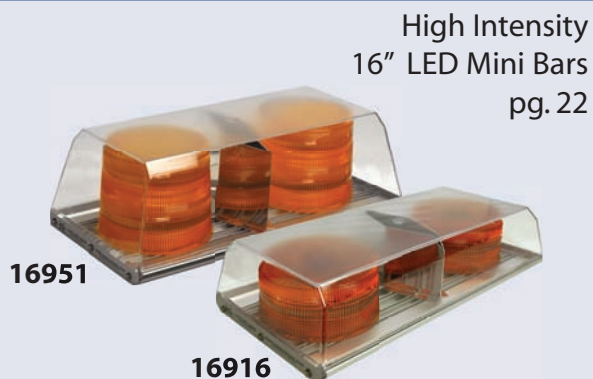

HIGH POWER ARROWS

More high power arrow configurations available
pg. 53

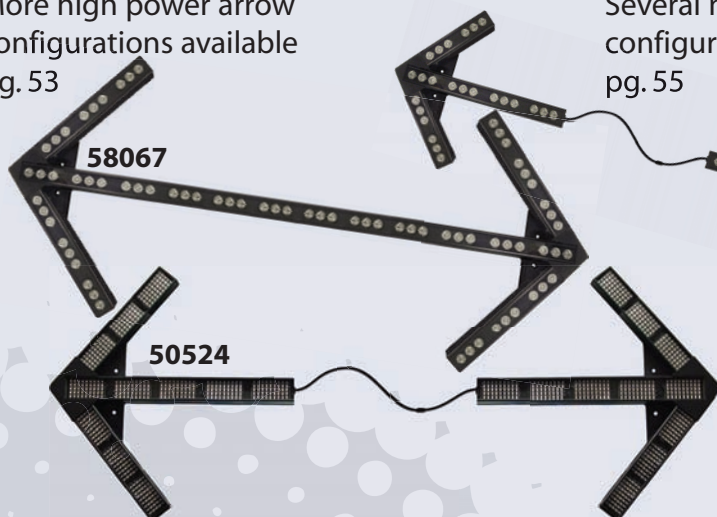

Several new split high power arrow configurations available as well
pg. 55

Split traffic arrow configurations available as well
pg. 51

SLE WARNING HEADS

Slim and versatile LED panels
pg. 61



SWS WARNING PACKAGES

BEACONS, LIGHT BARS, TRAFFIC DIRECTORS AND WARNING STICKS

SWS warning package offerings that bring exceptional products at a competitive price to you! Choose from the following pages, an array of package options to suit all your roadside lighting needs. Specifically geared to truck and truck racking systems, our packages are available in economy, midrange and high end configurations and are available under one part number for easy ordering!

*~ Save time and money ~
Order your Complete Warning light package today!*



Kit #75003




Proudly
Canadian

SWS WARNING LIGHT PACKAGES

ECONOMY CONTRACTOR #75001

Kit includes a fleet style traffic director with control box, back-up alarm, our flange mount polycarbonate strobe in amber and a switch.

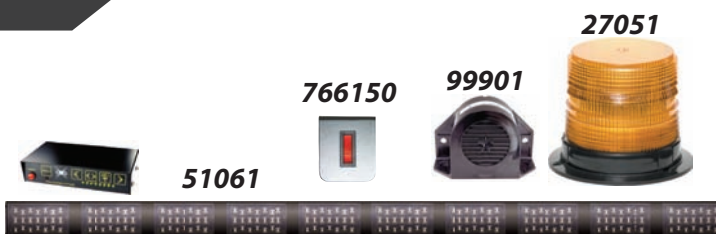


CLASSIC UTILITY #75002

Kit includes an extreme fleet traffic director with control box, our model 200A strobe beacon, back-up alarm and switch.




CLASSIC UTILITY - HIGH VISIBILITY #75003

Kit includes our high power directional arrow with control box, (2) model 200A strobe beacons, back-up alarm and switch.

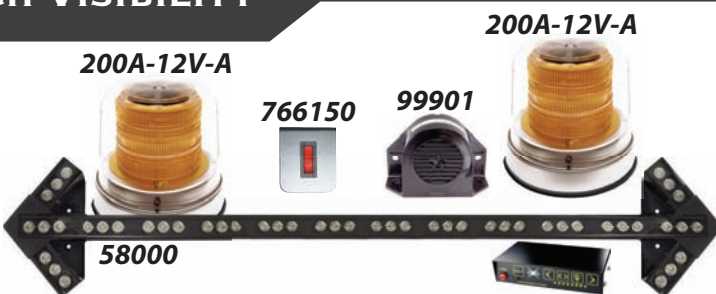


MAXIMUM ROAD MAN #75016

Kit includes an extreme fleet traffic director with control box, an LED beacon, back-up alarm and a switch.

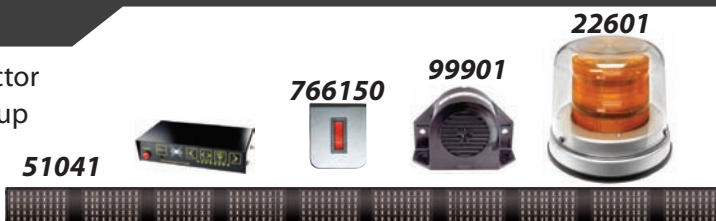

CLASSIC UTILITY - HIGH VISIBILITY #75005


Kit includes our extreme fleet directional arrow with control box, our 400A model rotator, back-up alarm and switch.

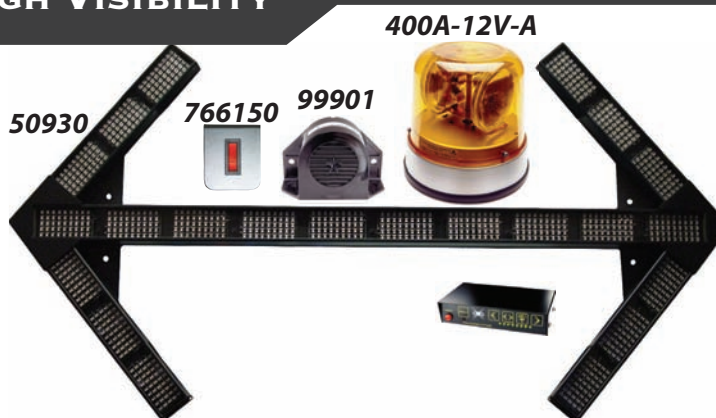

SWS WARNING LIGHT PACKAGES

ECONOMY CONTRACTOR #75006

Kit includes fleet LED traffic director with control box, our low profile mini light bar, back-up alarm and switch.

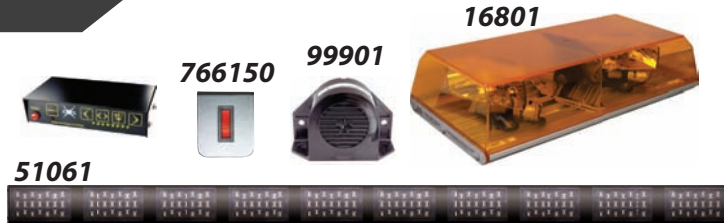


CLASSIC UTILITY #75007

Kit includes extreme fleet LED traffic director with control box, back-up alarm, our low profile strobe mini light bar and switch.



MAXIMUM ROAD MAN #75008

Kit includes our high power LED traffic director with control box, low profile extreme fleet LED mini light bar, die-cast back-up alarm with user selectable, multi-decibel functionality and switch.

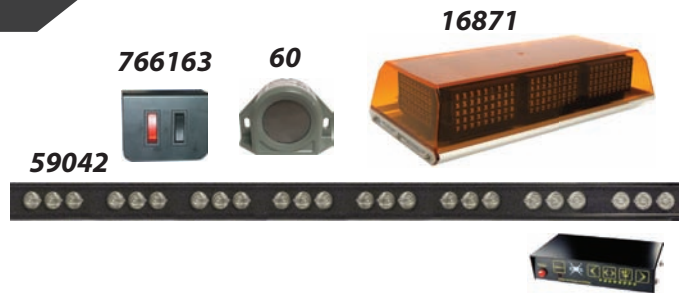


MAXIMUM ROAD MAN - HIGH VISIBILITY #75009

Kit includes high power LED directional arrow with control box, our extreme fleet/high power LED mini light bar, die-cast back-up alarm with user selectable, multi-decibel functionality and switch.



CLASSIC UTILITY - HIGH VISIBILITY #75010

Kit includes high power LED directional arrow with control box, 24" strobe light bar, back-up alarm and switch.

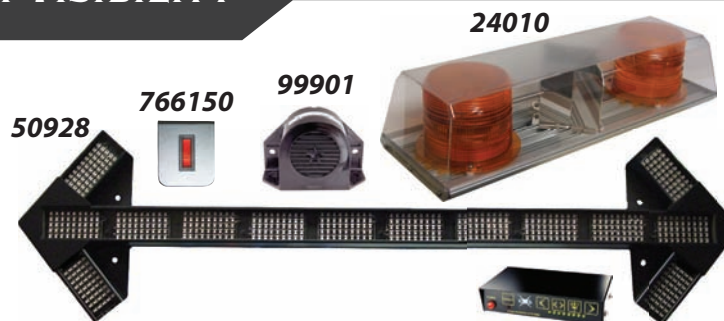

Proudly Canadian

SWS PACKAGE CONTENT SPECIFICATIONS

BEACONS

Model #	Volts DC	Max Amps	Mounting	Dome/Lens/LED Colour	Flash Patterns
27051	12-48	2.5	Flange	Amber Lens	Double, Single, Quad
200A-12V-A	12-48	2.5	Permanent	Amber Lens, Clear Dome	Double, Single, Quad
25000	12	2	Permanent	Amber LEDs, Clear Dome	25 User Selectable
400A-12V-A	12	6.5	Permanent	Amber Dome	180 Flashes per Minute

MINI LIGHT BARS

Model #	Volts DC	Dome/Lens/LED Colour	# LED Panels/ LED Sets	Length	Height	Flash Patterns
16801	12	Amber Dome	n/a	16"	3 5/8"	170 Flashes per Minute
16831	12	Clear Lens, Amber Dome	n/a	16"	3 5/8"	Double, Triple, Quad
16871	12	Amber LEDs, Amber Dome	8 LED Panels	16"	3 5/8"	25 User Selectable
16072	12	Amber LEDs, Amber Dome	8 LED Panels, 8 Sets	16"	5 3/8"	25 User Selectable
24010	12	Amber Lens, Clear Dome	n/a	24"	5 3/8"	Double, Triple, Quad

TRAFFIC DIRECTORS AND DIRECTIONAL ARROWS

Model #	Length	Total Height	LED Panel Type	# of Panels in Shaft	Total Panels
51061	48"	2 5/8"	Fleet	10	10
51041	48"	2 5/8"	Extreme Fleet	10	10
58000	48"	9"	High Power	12	16
59050	48"	1 5/8"	High Power	10	10
50930	48"	27 5/8"	Extreme Fleet	10	22
59042	42"	1 5/8"	High Power	8	8
50928	48"	14"	Extreme Fleet	10	14

BACK-UP ALARMS

Model #	Housing	Single Tone	db Levels Dual Tone	Steady Tone	Dimensions H x W x D
60	Die Cast	87,97,102,107,112	97,102	107	3 1/16" x 4 9/16" x 2"
99901	ABS	97	n/a	n/a	3 1/16" x 4 9/16" x 3"

SWITCHES

Model #	Type	# of Switches	Individual Switch Function	
			Sw #1	Sw #2
766150	Panel	1	on/off	-
766163	Panel	2	on/off	momentary



CABLE FOR TRAFFIC DIRECTORS AND DIRECTIONAL ARROWS

Cables included with traffic director and directional arrow, customer must specify length of cable upon ordering

Cable #	Length
77200	20'
77201	30'
77202	40'



Switching
Available
p. 78




Mounting
Solutions
Available
p. 82


360° LED BEACONS

360° LED BEACONS BIOPTIC™ OR MONOPTIC CONFIGURATIONS

- 10 - 30 Vdc
- 0.1 - 0.6 amps @ 12Vdc - Monoptic
- 0.1 - 1.1 amps @ 12Vdc - Bioptic™
- High brightness LEDs
- Multiple user selectable flash patterns
- Fully encapsulated electronics
- 7" flange on select models

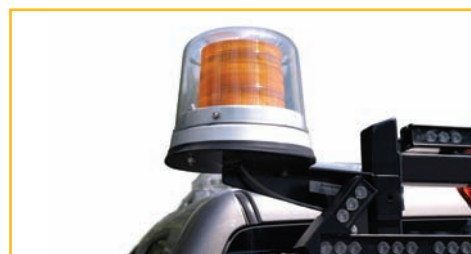

22601 on optional mounting bracket 98005

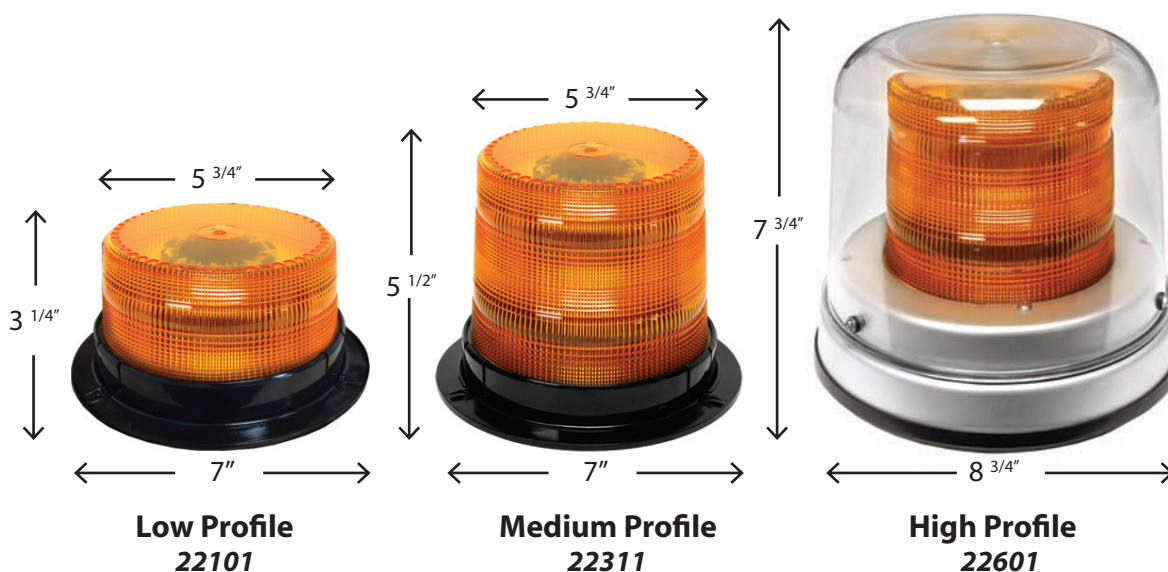

22000 Series

Replacement parts

Part ID	# of LEDs	Amps	Height	Lens Colour	LED Colour	Base Material	Mounting	Lens	Dome
Low Profile									
22101	8	0.1 - 0.6	3 3/8"	Amber	Amber	Polycarbonate	FL	877461	n/a
22102	8	0.1 - 0.6	3 3/4"	Amber	Amber	Polycarbonate	MM	877461	n/a
22105	8	0.1 - 0.6	3 3/8"	Blue	Blue	Polycarbonate	FL	877463	n/a
22106	8	0.1 - 0.6	3 3/4"	Blue	Blue	Polycarbonate	MM	877463	n/a
22109	8	0.1 - 0.6	3 3/8"	Clear	White	Polycarbonate	FL	877459	n/a
Medium Profile									
22311	16	0.1 - 1.1	5 1/2"	Amber	Amber	Polycarbonate	FL	877453	n/a
22312	16	0.1 - 1.1	5 3/4"	Amber	Amber	Polycarbonate	MM	877453	n/a
22315	16	0.1 - 1.1	5 1/2"	Blue	Blue	Polycarbonate	FL	877455	n/a
22316	16	0.1 - 1.1	5 3/4"	Blue	Blue	Polycarbonate	MM	877455	n/a
22319	16	0.1 - 1.1	5 1/2"	Clear	White	Polycarbonate	FL	877451	n/a
High Profile									
22601	16	0.1 - 1.1	7 3/4"	Amber	Amber	Aluminum	PM	877454	134-1-C
22603	16	0.1 - 1.1	7 3/4"	Blue	Blue	Aluminum	PM	877456	134-1-C

Legend: PM = Permanent Mount, MM = Magnetic Mount, FL = Flange Mount



Proudly
Canadian



Switching
Available
p. 78




Mounting
Solutions
Available
p. 82

HIGH PROFILE STROBE BEACONS

HIGH PROFILE STROBE BEACON OPEN BOTTOM DESIGN, PERMANENT MOUNT

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Polycarbonate dome/lens
- Fully encapsulated circuitry
- Anodized aluminum base
- Shipping weight: 4.5 lbs (200A), 2.7 lbs (200C)
- Lens colours include: amber, blue, clear, green and red

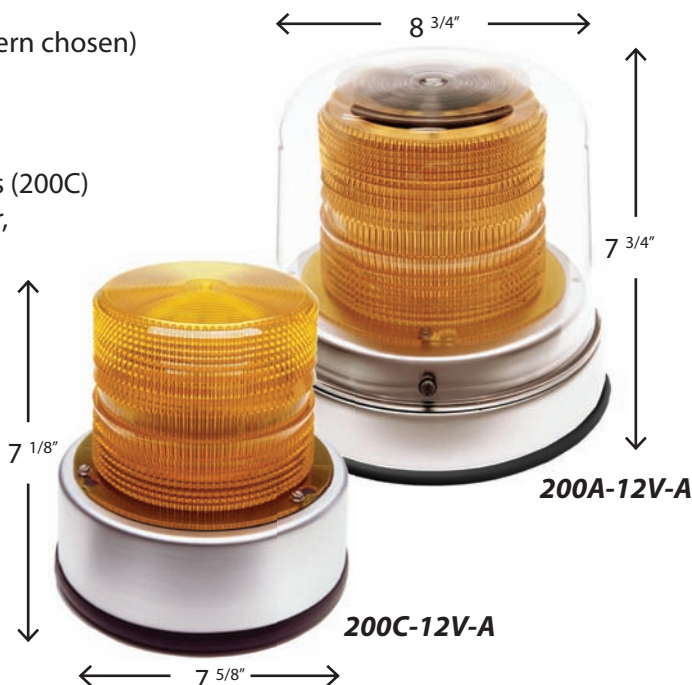

Note: Dimming feature indicates photocell with automatic night time operation

200A Series

Model #	Lens Colour	Volts DC	Max Amps	Dimming	Replacement Parts			
					Dome	Lens	Circuit	Strobe Tube
200A-12V-A	Amber	12-48	2.5	No	134-1-C	300-A	181MF-12V	129
200A-12V-B	Blue	12-48	2.5	No	134-1-C	300-B	181MF-12V	129
200A-12V-C	Clear	12-48	2.5	No	134-1-C	300-C	181MF-12V	129
200APC-12V-A	Amber	12-48	2.5	Yes	134-1-C	300-A	181PC-12V	129
200APC-12V-B	Blue	12-48	2.5	Yes	134-1-C	300-B	181PC-12V	129
200APC-12V-C	Clear	12-48	2.5	Yes	134-1-C	300-C	181PC-12V	129
200A-72V-A	Amber	72-125	0.5	No	134-1-C	300-A	181MF-72V	129
200A-72V-B	Blue	72-125	0.5	No	134-1-C	300-B	181MF-72V	129
200A-72V-C	Clear	72-125	0.5	No	134-1-C	300-C	181MF-72V	129

200C Series

Model #	Lens Colour	Volts DC	Max Amps	Dimming	Replacement Parts			
					Dome	Lens	Circuit	Strobe Tube
200C-12V-A	Amber	12-48	2.5	No	n/a	300-A	181MF-12V	129
200C-12V-B	Blue	12-48	2.5	No	n/a	300-B	181MF-12V	129
200C-12V-C	Clear	12-48	2.5	No	n/a	300-C	181MF-12V	129
200C-72V-A	Amber	72-125	0.5	No	n/a	300-A	181MF-72V	129
200C-72V-B	Blue	72-125	0.5	No	n/a	300-B	181MF-72V	129
200C-72V-C	Clear	72-125	0.5	No	n/a	300-C	181MF-72V	129



Proudly
Canadian



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82

HIGH PROFILE STROBE BEACON CLOSED BOTTOM DESIGN

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Polycarbonate dome/lens
- Shipping weight: 4.5 lbs (201B), 6.4 lbs (200BC)
- Clear outer dome standard
- Lens/Dome colours available include: amber, blue, clear, green and red

201B SERIES:

- Anodized aluminum base
- Permanent mount, closed bottom

200BC SERIES:

- Die cast base
- 3/4" NPT conduit mount



Note: Dimming feature indicates photocell with automatic night time operation

201B Series

Model #	Lens Colour	Volts DC	Max Amps	Dimming	Replacement Parts			
					Dome	Lens	Circuit	Strobe Tube
201B-12V-A	Amber	12-48	2.5	No	134-2-C	300-A	181MF-12V	129
201B-12V-B	Blue	12-48	2.5	No	134-2-C	300-B	181MF-12V	129
201B-12V-C	Clear	12-48	2.5	No	134-2-C	300-C	181MF-12V	129
201BPC-12V-A	Amber	12-48	2.5	Yes	134-2-C	300-A	181PC-12V	129
201BPC-12V-B	Blue	12-48	2.5	Yes	134-2-C	300-B	181PC-12V	129
201BPC-12V-C	Clear	12-48	2.5	Yes	134-2-C	300-C	181PC-12V	129
201B-72V-A	Amber	72-125	0.5	No	134-2-C	300-A	181MF-72V	129
201B-72V-B	Blue	72-125	0.5	No	134-2-C	300-B	181MF-72V	129
201B-72V-C	Clear	72-125	0.5	No	134-2-C	300-C	181MF-72V	129

200BC Series

Model #	Lens Colour	Volts DC	Max Amps	Dimming	Replacement Parts			
					Dome	Lens	Circuit	Strobe Tube
200BC-12V-A	Amber	12-48	2.5	No	134-1-C	300-A	181MF-12V	129
200BC-12V-B	Blue	12-48	2.5	No	134-1-C	300-B	181MF-12V	129
200BC-12V-C	Clear	12-48	2.5	No	134-1-C	300-C	181MF-12V	129
200BC-72V-A	Amber	72-125	0.5	No	134-1-C	300-A	181MF-72V	129
200BC-72V-B	Blue	72-125	0.5	No	134-1-C	300-B	181MF-72V	129
200BC-72V-C	Clear	72-125	0.5	No	134-1-C	300-C	181MF-72V	129

HIGH PROFILE STROBE BEACONS




Proudly
Canadian

HIGH PROFILE LED BEACON

OPEN BOTTOM DESIGN, PERMANENT MOUNT

- 360 degree LED beacon, 8 sided
- 25 patterns available
- Polycarbonate dome
- Fully encapsulated circuitry
- Anodized aluminum base
- 20' cable and switch included

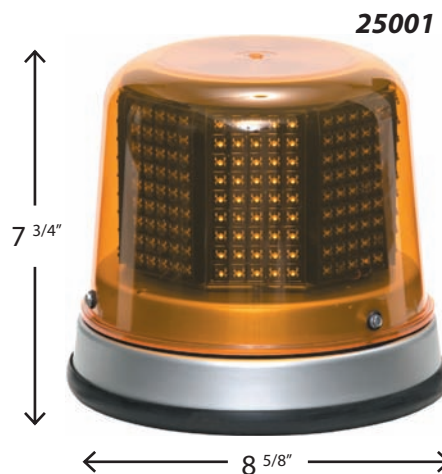

High profile Beacons mounted on bracket 98005(D) and 98004 (P)

25000 Series

Model #	LED Colour	Volts DC	Dome Colour	Replacement Dome
25000	Amber	12	Clear	134-1-C
25001	Amber	12	Amber	134-1-A
25002	Red	12	Clear	134-1-C
25003	Blue	12	Blue	134-1-B
25005	White	12	Clear	134-1-C
25051	Amber	24	Amber	134-1-A

Legend: D = Driver side, P = Passenger side.




Switching
Available
p. 78



Mounting
Solutions
Available
p. 82

MEDIUM PROFILE STROBE BEACON DIE CAST BASE

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Polycarbonate lens
- Fully encapsulated circuitry
- Shipping weight: 2.7lbs
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Lens colours include amber, blue, clear, green and red

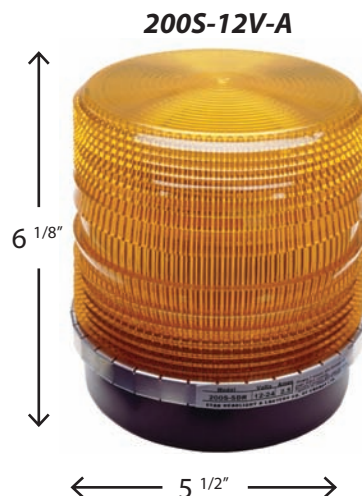

Note: Dimming feature indicates photocell with automatic night time operation

200S Series

Replacement Parts

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Lens	Circuit	Strobe Tube
200S-12V-A	Amber	12-48	2.5	PM, CD	No	DSQ	300-S-A	181SMF-12V	129
200S-12V-B	Blue	12-48	2.5	PM, CD	No	DSQ	300-S-B	181SMF-12V	129
200S-12V-C	Clear	12-48	2.5	PM, CD	No	DSQ	300-S-C	181SMF-12V	129
200S-72V-A	Amber	72-125	0.5	PM, CD	No	DSQ	300-S-A	181SMF-72V	129
200S-72V-B	Blue	72-125	0.5	PM, CD	No	DSQ	300-S-B	181SMF-72V	129
200S-72V-C	Clear	72-125	0.5	PM, CD	No	DSQ	300-S-C	181SMF-72V	129
200SPC-12V-A	Amber	12-48	2.5	PM, CD	Yes	DSQ	300-S-A	181SPC-12V	129
200SPC-12V-B	Blue	12-48	2.5	PM, CD	Yes	DSQ	300-S-B	181SPC-12V	129
200SPC-12V-C	Clear	12-48	2.5	PM, CD	Yes	DSQ	300-S-C	181SPC-12V	129
200SM-12V-A	Amber	12-48	2.5	MM	No	Single	300-S-A	181SMF-12V	129
200SM-12V-B	Blue	12-48	2.5	MM	No	Single	300-S-B	181SMF-12V	129
200SM-12V-C	Clear	12-48	2.5	MM	No	Single	300-S-C	181SMF-12V	129
200SDM-12V-A	Amber	12-48	2.5	MM	No	Double	300-S-A	181SMF-12V	129
200SDM-12V-B	Blue	12-48	2.5	MM	No	Double	300-S-B	181SMF-12V	129
200SDM-12V-C	Clear	12-48	2.5	MM	No	Double	300-S-C	181SMF-12V	129
200SQM-12V-A	Amber	12-48	2.5	MM	No	Quad	300-S-A	181SMF-12V	129
200SQM-12V-B	Blue	12-48	2.5	MM	No	Quad	300-S-B	181SMF-12V	129
200SQM-12V-C	Clear	12-48	2.5	MM	No	Quad	300-S-C	181SMF-12V	129

Legend: PM = Permanent Mount, MM = Magnetic Mount, CD = 1/2"NPT Conduit Mount, DSQ = User selectable flash patterns: double 126 fpm, single 75 fpm or quad 192 fpm



Proudly
Canadian



Switching
Solutions
Available
p. 78





Mounting
Solutions
Available
p. 82

MEDIUM PROFILE STROBE BEACONS


MEDIUM PROFILE STROBE BEACON DURABLE POLYCARBONATE CONSTRUCTION

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Shipping weight: 2.7 lbs
- 1/2"NPT conduit mount/permanent mount flange mount or bear claw saddle mount versions
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Permanent mount versions supplied with 1/2"NPT feature and surface mount hardware
- Flange conversion kit #27200
- O-ring seal
- Lens colours include amber, blue, clear, green and red

27052

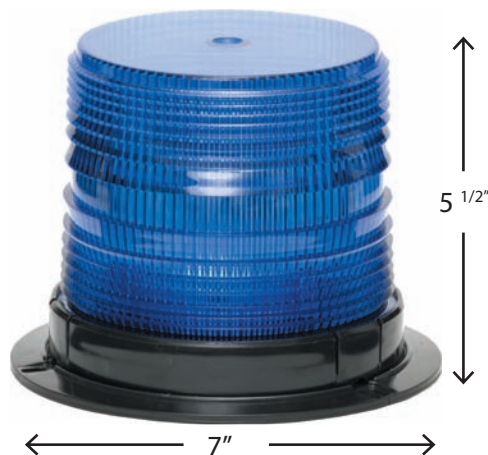

Optional mounting bracket
98017^(D) or 98018^(P) for
beacons with a 7" Flange



Optional mounting bracket
98006^(P) or 98007^(D) for
beacons with a 5 3/4" base

27021 - Magnet Mount



Note: Dimming feature indicates photocell with automatic night time operation

27000 Series

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Height	Lens	Circuit	Strobe Tube
27001	Amber	12-48	2.5	PM	No	DSQ	5 3/4"	300-S-A	27100	129
27002	Blue	12-48	2.5	PM	No	DSQ	5 3/4"	300-S-B	27100	129
27021	Amber	12-48	2.5	MM	No	Single	5 5/8"	300-S-A	27100	129
27022	Blue	12-48	2.5	MM	No	Single	5 5/8"	300-S-B	27100	129
27041	Amber	12-48	2.5	MM	No	Quad	5 5/8"	300-S-A	27100	129
27042	Blue	12-48	2.5	MM	No	Quad	5 5/8"	300-S-B	27100	129
27051	Amber	12-48	2.5	FL	No	DSQ	5 1/2"	300-S-A	27100	129
27052	Blue	12-48	2.5	FL	No	DSQ	5 1/2"	300-S-B	27100	129
27057	Amber	12-48	2.5	FL	Yes	DSQ	5 1/2"	300-S-A	194633	129
27058	Blue	12-48	2.5	FL	Yes	DSQ	5 1/2"	300-S-B	194633	129
27061	Amber	12-48	2.5	MB	No	DSQ	5 3/4"	300-S-A	27100	129
27062	Blue	12-48	2.5	MB	No	DSQ	5 3/4"	300-S-B	27100	129
27011	Amber	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-A	27101	129
27012	Blue	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-B	27101	129
27013	Clear	72-125	0.5	PM	No	DSQ	5 3/4"	300-S-C	27101	129

Bear Claw Model

Model #	Lens Colour	Volts DC	Max Amps	Mounting	Dimming	Flash	Height
27091	Amber	12-48	0.5	LM	No	Double	6 7/8"

Replacement Parts for Bear Claw Model

Lens	Circuit	Strobe Tube	Saddle
300-S-A	27100	129	27102

THE BEAR CLAW
LOGGER LIGHT



Legend: PM = Permanent Mount, MM = Magnetic Mount, MB = Mirror Bracket Mount, FL = Flange Mount
DSQ = User selectable flash patterns: double 126 fpm, single (75 fpm) or quad (192 fpm),
LM = Log Mount, (D) = Driver, (P) = Passenger



Proudly
Canadian



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82


MEDIUM PROFILE STROBE BEACONS

MEDIUM PROFILE STROBE BEACON SILICONE RUBBER BASE

- Corrosion proof housing
- Polycarbonate lens
- Encapsulated Electronics
- Lens colours include amber, blue, clear and red

208 SERIES:

- 12 - 48Vdc
- 2.5 amps

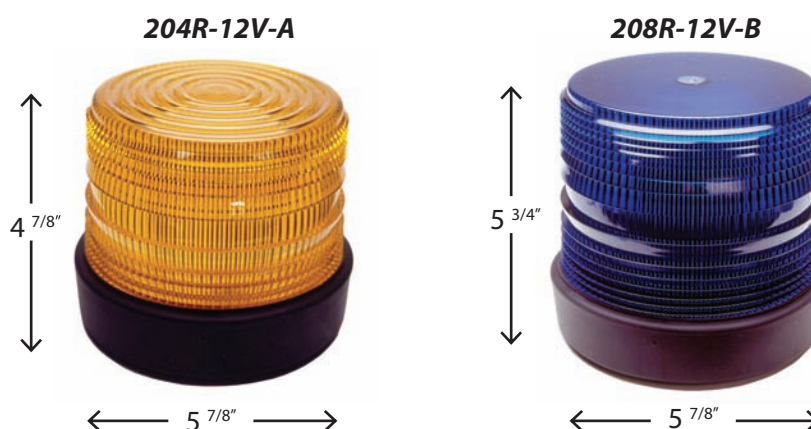

Note: Dimming feature indicates photocell with automatic night time operation

204 Series								Replacement Parts		
Model #	Lens Colour	Volts DC	Max Amps	Flash	Joules	Mounting	Weight lbs	Lens	Circuit	Strobe Tube
204R-12V-A	Amber	12	0.5	Single	3	PM	2.5	298-A	181-ZC-12V	129-Z
204R-12V-B	Blue	12	0.5	Single	3	PM	2.5	298-B	181-ZC-12V	129-Z
204R-24V-A	Amber	24	0.3	Single	3	PM	2.5	298-A	181-ZC-24V	129-Z
204R-24V-B	Blue	24	0.3	Single	3	PM	2.5	298-B	181-ZC-24V	129-Z
204RM-12V-A	Amber	12	0.5	Single	3	MM	2.5	298-A	181-ZC-12V	129-Z
204RM-12V-B	Blue	12	0.5	Single	3	MM	2.5	298-B	181-ZC-12V	129-Z
208 Series								Replacement Parts		
Model #	Lens Colour	Flash	Joules	Mounting	Dimming	Weight lbs	Lens	Circuit	Strobe Tube	
208R-12V-A	Amber	DSQ	*10-22	PM	na	2.45	299-A	181SMF-208R	129-S	
208R-12V-B	Blue	DSQ	*10-22	PM	na	2.45	299-B	181SMF-208R	129-S	
208RPC-12V-A	Amber	DSQ	*10-22	PM	yes	2.45	299-A	194633	129-S	
208RPC-12V-B	Blue	DSQ	*10-22	PM	yes	2.45	299-B	194633	129-S	
208RM-12V-A	Amber	Single	10	MM	na	2.9	299-A	181SMF-208R	129-S	
208RM-12V-B	Blue	Single	10	MM	na	2.9	299-B	181SMF-208R	129-S	
208RDM-12V-A	Amber	Double	18	MM	na	2.9	299-A	181SMF-208R	129-S	
208RDM-12V-B	Blue	Double	18	MM	na	2.9	299-B	181SMF-208R	129-S	
208RQM-12V-A	Amber	Quad	22	MM	na	2.9	299-A	181SMF-208R	129-S	
208RQM-12V-B	Blue	Quad	22	MM	na	2.9	299-B	181SMF-208R	129-S	

Legend: DSQ = User selectable flash patterns: double (126 fpm), single (75 fpm) or quad (192 fpm)
PM = Permanent Mount, MM = Magnetic Mount *Joule rating depends on flash chosen



Proudly
Canadian



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82

LOW PROFILE STROBE BEACONS




Proudly
Canadian

LOW PROFILE STROBE BEACON DURABLE POLYCARBONATE CONSTRUCTION

- User selectable flash patterns; double (126 fpm), single (75 fpm) or quad (192 fpm)
- 10-22 Joules (depending on flash pattern chosen)
- Fully encapsulated circuitry
- Shipping weight: 2.7 lbs
- 1/2"NPT conduit mount/permanent mount or flange mount versions
- Magnetic mount models supplied with 80 lb pull magnet and switched/fused cigarette lighter plug assembly
- Permanent mount versions supplied with 1/2"NPT feature and surface mount hardware
- Flange conversion kit #27200
- O-ring seal
- Lens colours include amber, blue, clear, green and red

27006

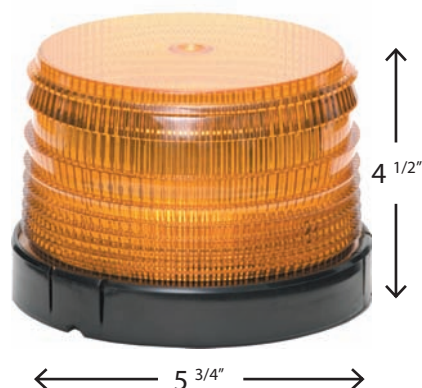

27026 shown on optional
bracket 98007 with clamp 98009

27000 Series							Replacement Parts		
Model #	Lens Colour	Volts DC	Max Amps	Mounting	Flash	Height	Lens	Circuit	Strobe Tube
27006	Amber	12-48	2.5	PM	DSQ	4 1/2"	877334	27100	129-S
27007	Blue	12-48	2.5	PM	DSQ	4 1/2"	877335	27100	129-S
27026	Amber	12-48	2.5	MM	Single	4 7/8"	877334	27100	129-S
27027	Blue	12-48	2.5	MM	Single	4 7/8"	877335	27100	129-S
27081	Amber	12-48	2.5	MM	Quad	4 7/8"	877334	27100	129-S
27082	Blue	12-48	2.5	MM	Quad	4 7/8"	877335	27100	129-S
27086	Amber	12-48	2.5	FL	DSQ	4 5/8"	877334	27100	129-S
27087	Blue	12-48	2.5	FL	DSQ	4 5/8"	877335	27100	129-S
27066	Amber	12-48	2.5	MB	DSQ	4 1/2"	877334	27100	129-S
27067	Blue	12-48	2.5	MB	DSQ	4 1/2"	877335	27100	129-S
27016	Amber	72-125	0.5	PM	DSQ	4 1/2"	877334	27101	129-S
27017	Blue	72-125	0.5	PM	DSQ	4 1/2"	877335	27101	129-S
27018	Clear	72-125	0.5	PM	DSQ	4 1/2"	877337	27101	129-S
Meets SAEJ1318 Approval									
27088	Clear	12-48	2.5	FL	DSQ	4 1/2"	877337	27100	129-S

Legend: PM = Permanent Mount, MM = Magnetic Mount, MB = Mirror Bracket Mount, FL = Flange Mount
DSQ = User selectable flash patterns: double 126 fpm, single (75 fpm) or quad (192 fpm)



Switching
Available
p. 78





Mounting
Solutions
Available
p. 82

LOW PROFILE STROBE BEACON

POWDER COATED DIE CAST BASE

- Single flash 65 fpm
- 3 Joules
- Polycarbonate lens
- Fully encapsulated circuitry
- Shipping weight: 1.5 lbs (200Z), 2 lbs (200ZM)
- Magnetic mount conversion Kit #179
- 36Vdc models available in permanent mount
- Lens colours include amber, blue, clear, green, magenta and red

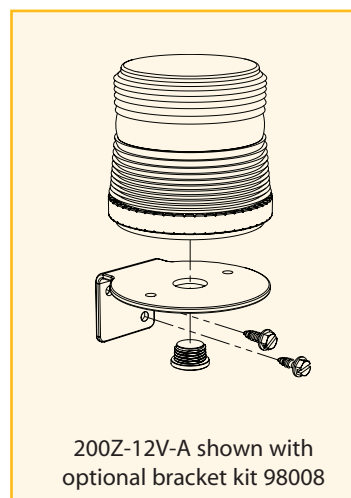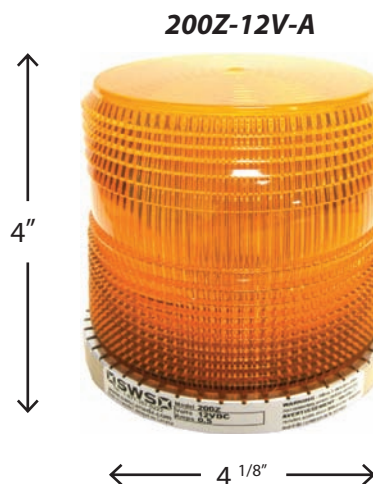

200Z Series

Model #	Lens Colour	Volt DC	Max Amps	Mounting	Replacement Parts		
					Lens	Circuit	Strobe Tube
200Z-12V-A	Amber	12	0.5	PM,CD	330-A	181-Z-12V	129-Z
200Z-12V-B	Blue	12	0.5	PM,CD	330-B	181-Z-12V	129-Z
200Z-12V-C	Clear	12	0.5	PM,CD	330-C	181-Z-12V	129-Z
200Z-12V-R	Red	12	0.5	PM,CD	330-R	181-Z-12V	129-Z
200Z-24V-A	Amber	24	0.3	PM,CD	330-A	181-Z-24V	129-Z
200Z-24V-B	Blue	24	0.3	PM,CD	330-B	181-Z-24V	129-Z
200Z-24V-C	Clear	24	0.3	PM,CD	330-C	181-Z-24V	129-Z
200Z-24V-R	Red	24	0.3	PM,CD	330-R	181-Z-24V	129-Z
200ZM-12V-A	Amber	12	0.5	MM	330-A	181-Z-12V	129-Z
200ZM-12V-B	Blue	12	0.5	MM	330-B	181-Z-12V	129-Z
200ZM-12V-C	Clear	12	0.5	MM	330-C	181-Z-12V	129-Z
200ZM-12V-G	Green	12	0.5	MM	330-G	181-Z-12V	129-Z
200ZM-12V-R	Red	12	0.5	MM	330-R	181-Z-12V	129-Z

Legend: PM = Permanent Mount, MM = Magnetic Mount, CD = 1/2"NPT Conduit Mount



Proudly
Canadian

LOW PROFILE STROBE BEACONS



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82

LOW PROFILE STROBE BEACONS

LOW PROFILE STROBE BEACON CORROSION PROOF POLYCARBONATE BASE/LENS

- Single Flash 65 fpm
- Fully encapsulated circuitry
- O-Ring seal snap lens
- Shipping weight: 1 lb (201Z), 1.5 lbs (201ZM)
- Conduit mount units will accept mirror bracket kit #175 or magnetic mount Kit #179
- Magnetic mount models supplied with switched/fused cigarette lighter plugs
- 36Vdc models available in permanent mount
- Lens colours include amber, blue, clear, green, magenta and red




Magnetic mount



Mirror bracket mount

201Z-12V-A

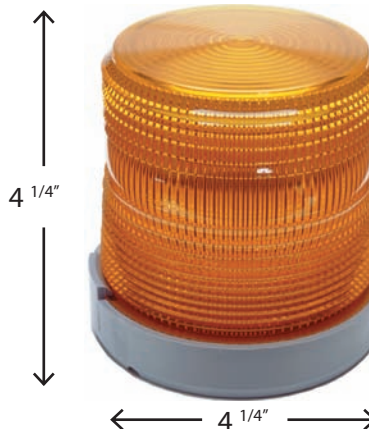

201Z Series

Model #	Lens Colour	Volts DC	Max Amps	Joules	Mounting	Weight lbs	Replacement Parts		
							Lens	Circuit	Strobe Tube
201Z-12V-A	Amber	12	0.5	3	PM,CD	0.9	330-A	181-Z-12V	129-Z
201Z-12V-B	Blue	12	0.5	3	PM,CD	0.9	330-B	181-Z-12V	129-Z
201Z-12V-C	Clear	12	0.5	3	PM,CD	0.9	330-C	181-Z-12V	129-Z
201Z-12V-R	Red	12	0.5	3	PM,CD	0.9	330-R	181-Z-12V	129-Z
201Z-24V-A	Amber	24	0.3	3	PM,CD	0.9	330-A	181-Z-24V	129-Z
201Z-24V-B	Blue	24	0.3	3	PM,CD	0.9	330-B	181-Z-24V	129-Z
201Z-24V-C	Clear	24	0.3	3	PM,CD	0.9	330-C	181-Z-24V	129-Z
201Z-24V-R	Red	24	0.3	3	PM,CD	0.9	330-R	181-Z-24V	129-Z
201ZB-12V-A	Amber	12	0.5	3	MB	2.1	330-A	181-Z-12V	129-Z
201ZB-12V-B	Blue	12	0.5	3	MB	2.1	330-B	181-Z-12V	129-Z
201ZM/878-G	Green	12	0.5	3	MM,RFLR	2.8	330-G	181-Z-12V	129-Z
201ZM-12V-A	Amber	12	0.5	3	MM	1.5	330-A	181-Z-12V	129-Z
201ZM-12V-B	Blue	12	0.5	3	MM	1.5	330-B	181-Z-12V	129-Z
201ZM-12V-C	Clear	12	0.5	3	MM	1.5	330-C	181-Z-12V	129-Z
201ZM-12V-G	Green	12	0.5	3	MM	1.5	330-G	181-Z-12V	129-Z
201ZM-12V-R	Red	12	0.5	3	MM	1.5	330-R	181-Z-12V	129-Z
201ZM-24V-A	Amber	24	0.3	3	MM	1.5	330-A	181-Z-24V	129-Z
201ZMV-A	Amber	12-80	0.3	1.3	PM,CD	0.9	330-A	181-ZMV	129-Z
201ZMV-B	Blue	12-80	0.3	1.3	PM,CD	0.9	330-B	181-ZMV	129-Z
201ZMV-C	Clear	12-80	0.3	1.3	PM,CD	0.9	330-C	181-ZMV	129-Z
201ZMV-R	Red	12-80	0.3	1.3	PM,CD	0.9	330-R	181-ZMV	129-Z
201ZMVM-A	Amber	12-80	0.3	1.3	MM	1.5	330-A	181-ZMV	129-Z
201ZMVM-B	Blue	12-80	0.3	1.3	MM	1.5	330-B	181-ZMV	129-Z

Legend: PM = Permanent Mount, MM = Magnetic Mount, CD = 1/2"NPT Conduit Mount, MB = Mirror Bracket, RFLR = Mirror Reflector



Proudly
Canadian



Switching
Available
p. 78




Mounting
Solutions
Available
p. 82

HIGH PROFILE ROTATOR BEACON DUAL BEAM


- 12Vdc or 24Vdc
- Heavy duty brush assembly - supplied with shunt wire, extra long life
- 180 flashes per minute
- MTO/DOT Approved
- Meets SAEJ845
- Polycarbonate protective outer dome
- Anodized aluminum base
- Open bottom units provided with "U" channel rubber seal (400A series)
- Closed bottom units surface mount or 3/4" NPT conduit mount (400B series)
- RFI protection models filter between 130-180MHz
- GE sealed beam bulbs
- Dome colours include amber, blue, clear, green and red

A. 400B-12-V-A shown with optional mounting plate #98011 & C-bracket # 98014

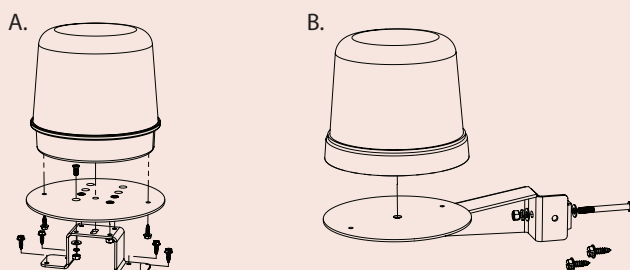

B. Mounting Bracket #98004 (Passenger side) mounts a High profile beacon to any 2" upright bar. Order bracket #98005 for driver side

400A-12V-A

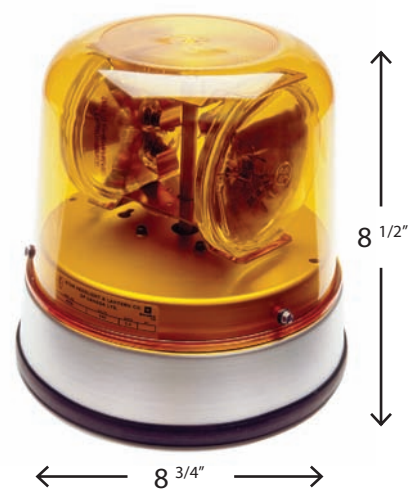

400B-12V-B



400A Series					Replacement Parts	
Model #	Dome Colour	Volts DC	RFI Filter	Base	Domes	Bulbs
400A-12V-A	Amber	12	No	Open	134 -1-A	2073-7400
400A-12V-B	Blue	12	No	Open	134 -1-B	2073-7400
400A-RFI-A	Amber	12	Yes	Open	134 -1-A	2073-7400
400A-RFI-B	Blue	12	Yes	Open	134 -1-B	2073-7400
400A-24V-A	Amber	24	No	Open	134 -1-A	2073-4505
400A-24V-B	Blue	24	No	Open	134 -1-B	2073-4505
400ARFI-24-A	Amber	24	Yes	Open	134 -1-A	2073-4505
400ARFI-24-B	Blue	24	Yes	Open	134 -1-B	2073-4505
400B-12V-A	Amber	12	No	Closed	134 -2-A	2073-7400
400B-12V-B	Blue	12	No	Closed	134 -2-B	2073-7400
400B-24V-A	Amber	24	No	Closed	134 -2-A	2073-4505
400B-24V-B	Blue	24	No	Closed	134 -2-B	2073-4505



Proudly
Canadian



Switching
Available
p. 78






Mounting
Solutions
Available
p. 82

HIGH PROFILE ROTATOR BEACONS

HIGH PROFILE ROTATOR BEACONS

- 85 fpm
- Gear driven rotator assembly
- Stainless steel bearings
- 50 watt halogen bulbs
- Polycarbonate outer dome
- Highly polished parabolic reflector

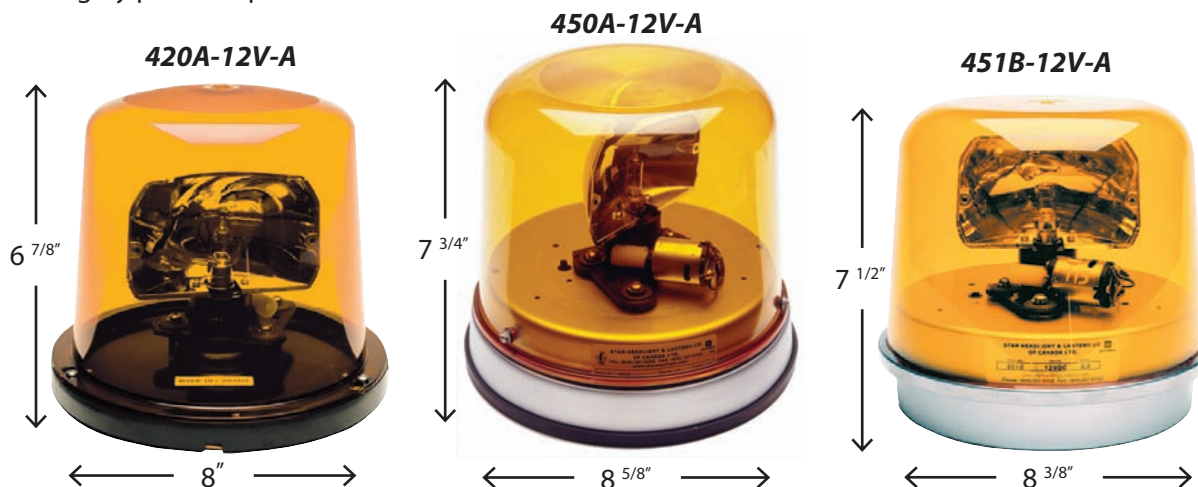

A. 451B-12-V-A shown with optional mounting plate #98011 & C-bracket # 98014

B. Optional mounting Bracket #98004 (Passenger side) mounts a high profile beacon to any 2" upright bar. Order bracket #98005 for driver side

420 & 450 Series

Model #	Dome Colour	Volts DC	Max Amps	Base	Mounting	Base Material	Replacement Parts	
							Bulb	Dome
420A-12V-A	Amber	12	4	Closed	FL	ABS	2073-795	134-3-A
420A-12V-B	Blue	12	4	Closed	FL	ABS	2073-795	134-3-B
420A-12V-C	Clear	12	4	Closed	FL	ABS	2073-795	134-3-C
420A-24V-A	Amber	24	2	Closed	FL	ABS	2073-H50W24V	134-3-A
420A-24V-B	Blue	24	2	Closed	FL	ABS	2073-H50W24V	134-3-B
420A-24V-C	Clear	24	2	Closed	FL	ABS	2073-H50W24V	134-3-C
450A-12V-A	Amber	12	4	Open	PM	Aluminum	2073-795	134-1-A
450A-12V-B	Blue	12	4	Open	PM	Aluminum	2073-795	134-1-B
450A-12V-C	Clear	12	4	Open	PM	Aluminum	2073-795	134-1-C
450A-24V-A	Amber	24	2	Open	PM	Aluminum	2073-H50W24V	134-1-A
450A-24V-B	Blue	24	2	Open	PM	Aluminum	2073-H50W24V	134-1-B
450A-24V-C	Clear	24	2	Open	PM	Aluminum	2073-H50W24V	134-1-C
451B-12V-A	Amber	12	4	Closed	PM	Aluminum	2073-795	134-2-A
451B-12V-B	Blue	12	4	Closed	PM	Aluminum	2073-795	134-2-B
451B-12V-C	Clear	12	4	Closed	PM	Aluminum	2073-795	134-2-C
451B-24V-A	Amber	24	2	Closed	PM	Aluminum	2073-H50W24V	134-2-A
451B-24V-B	Blue	24	2	Closed	PM	Aluminum	2073-H50W24V	134-2-B
451B-24V-C	Clear	24	2	Closed	PM	Aluminum	2073-H50W24V	134-2-C

Legend: FL = Flange Mount, PM = Permanent Mount



Proudly
Canadian



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82


MEDIUM PROFILE ROTATOR BEACON

DURABLE POLYCARBONATE CONSTRUCTION

- 85 Flashes per minute
- Gear Driven Rotator Assembly
- Stainless steel bearings
- 50 watt Halogen Bulb #2073-795
- Highly polished parabolic reflector
- Dome colours include amber, blue, clear, green and red

AVAILABLE IN:


- Permanent mount (1/2"NPT, & flush mount) magnetic and flange mount
- Magnetic mount models supplied with 12' cord with switching
- Optional conversion flange #27200 for use with permanent mount products



Bracket

Flange

Optional mounting bracket
98017^(D) or 98018^(P) for
beacons with a 7" Flange



Optional mounting bracket
98006^(P) or 98007^(D) for
beacons with a 5 3/4" base

28000 Series

Part ID	Dome Colour	Volts DC	Max Amps	Mounting	Dimensions (H" x W")	Weight lbs	Replacement Dome
28001	Amber	12	4	PM	5 1/4" x 5 3/4"	1.65	877401
28002	Blue	12	4	PM	5 1/4" x 5 3/4"	1.65	877402
28003	Clear	12	4	PM	5 1/4" x 5 3/4"	1.65	877403
28004	Green	12	4	PM	5 1/4" x 5 3/4"	1.65	877404
28005	Red	12	4	PM	5 1/4" x 5 3/4"	1.65	877405
28011	Amber	12	4	MM	5 5/8" x 5 3/4"	2.2	877401
28012	Blue	12	4	MM	5 5/8" x 5 3/4"	2.2	877402
28013	Clear	12	4	MM	5 5/8" x 5 3/4"	2.2	877403
28014	Green	12	4	MM	5 5/8" x 5 3/4"	2.2	877404
28015	Red	12	4	MM	5 5/8" x 5 3/4"	2.2	877405
28016	Amber	12	4	FL	5 3/8" x 7"	2.4	877401
28017	Blue	12	4	FL	5 3/8" x 7"	2.4	877402
28018	Clear	12	4	FL	5 3/8" x 7"	2.4	877403
28019	Green	12	4	FL	5 3/8" x 7"	2.4	877404
28020	Red	12	4	FL	5 3/8" x 7"	2.4	877405
28031	Amber	24	2	PM	5 1/4" x 5 3/4"	1.65	877401
28032	Blue	24	2	PM	5 1/4" x 5 3/4"	1.65	877402
28033	Clear	24	2	PM	5 1/4" x 5 3/4"	1.65	877403
28034	Green	24	2	PM	5 1/4" x 5 3/4"	1.65	877404
28035	Red	24	2	PM	5 1/4" x 5 3/4"	1.65	877405

Legend: PM = Permanent Mount, MM = Magnetic Mount, FL = Flange Mount, D = Driver Side, P = Passenger Side



Proudly
Canadian

MEDIUM PROFILE ROTATOR BEACONS



Switching
Available
p. 78




Mounting
Solutions
Available
p. 82


16" MINI LIGHT BARS

MINI LIGHT BARS - 16" ROTATING


- Optional external on/off switch #766150
- Polycarbonate outer dome, extruded aluminum base
- Outer dome colours available: amber, blue, clear, red
- Gear driven rotator uses stainless steel bearings for long life
- T-Slot mounting
- 12Vdc models- 8 amps max @ 12Vdc
- 24Vdc models-4 amps max @ 24Vdc
- Magnetic mount units supplied with 12' cigarette lighter cords, on/off switch
- Magnetic conversion kit #96000

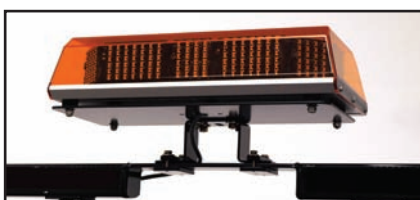

Optional mounting plate #98012 with C-bracket 98014 and 2 clamp kits 98009

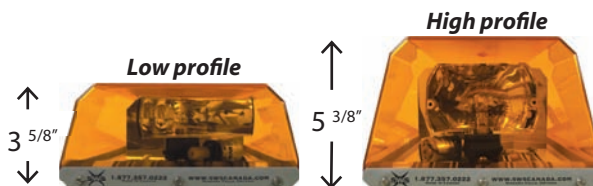

AVAILABLE IN LOW AND HIGH
PROFILE CONFIGURATIONS!

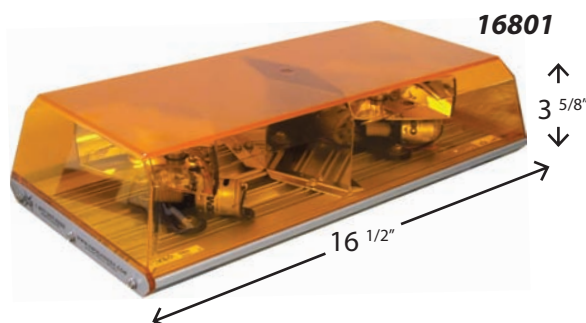

16000 Series

Model #	Outer Dome Colour	Volts DC	Rotator Lens Colour	Mounting	Height	FPM	Weight lbs	Replacement Dome
16801	Amber	12	n/a	PM	LP - 3 5/8"	170	5.7	877227
16802	Blue	12	n/a	PM	LP - 3 5/8"	170	5.7	877228
16806	Amber	12	n/a	MM	LP - 3 5/8"	170	7.3	877227
16807	Blue	12	n/a	MM	LP - 3 5/8"	170	7.3	877228
16001	Amber	12	n/a	PM	5 3/8"	170	5.9	877211
16002	Blue	12	n/a	PM	5 3/8"	170	5.9	877212
16006	Amber	12	n/a	MM	6 1/8"	170	7.5	877211
16007	Blue	12	n/a	MM	6 1/8"	170	7.5	877212
16011	Clear	12	Amber	PM	5 3/8"	170	5.9	877213
16019	Clear	12	Blue	PM	5 3/8"	170	5.9	877213
16014	Clear	12	Amber	MM	6 1/8"	170	7.5	877213
16017	Clear	12	Blue	MM	6 1/8"	170	7.5	877213
16018	Clear	12	Amber	MM	6 1/8"	300	7.5	877213
16101	Amber	12	n/a	PM	5 3/8"	300	5.9	877211
16102	Blue	12	n/a	PM	5 3/8"	300	5.9	877212
16106	Amber	12	n/a	MM	6 1/8"	300	7.5	877211
16107	Blue	12	n/a	MM	6 1/8"	300	7.5	877212
16110	Clear	12	Amber	PM	5 3/8"	300	5.9	877213
16111	Clear	12	Amber/Blue	PM	5 3/8"	300	5.9	877213
16401	Amber	24	n/a	PM	5 3/8"	170	5.9	877211
16301	Blue	24	n/a	PM	5 3/8"	170	5.9	877212
16405	Clear	24	Amber	PM	5 3/8"	170	5.9	877213
16402	Amber	24	n/a	MM	6 1/8"	170	5.9	877211

Legend: PM = Permanent Mount, MM = Magnetic Mount, LP = Low Profile



Proudly
Canadian




Switching
Available
p. 78





Mounting
Solutions
Available
p. 82

MINI LIGHT BARS - 16" STROBE

- 12-24Vdc input, 2.0 amps
- User selectable flash patterns; double, triple or quad
- Polycarbonate outer dome with extruded aluminum base
- T-Slot mounting
- Magnetic mount units supplied with 12' cigarette lighter cords, on/off switch
- Inner lens colours include amber, blue and clear
- Dome colours include amber, blue, clear, red and green

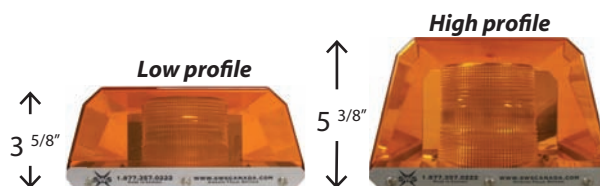

AVAILABLE IN LOW AND HIGH
PROFILE CONFIGURATIONS!

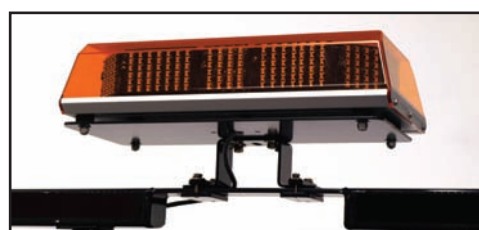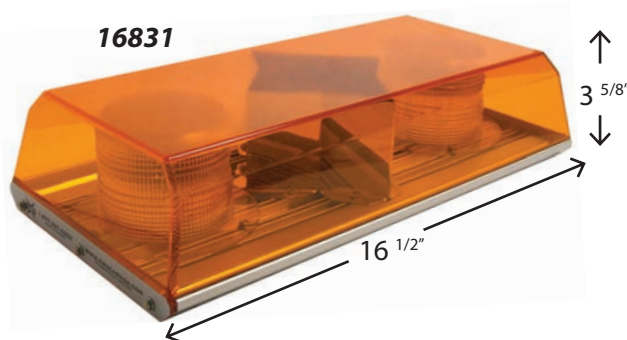

Optional mounting plate #98012 with
C-bracket 98014 and 2 clamp kits 98009

16000 Series

Model #	Outer Dome Colour	Inner Lens Colour	Mounting	Height	Flash Patterns	Replacement Parts	
						Dome	Lens
16831	Amber	Clear	PM	LP - 3 5/8"	DTQ	877227	877349
16832	Blue	Clear	PM	LP - 3 5/8"	DTQ	877228	877349
16836	Amber	Clear	MM	LP - 4 3/8"	Double	877227	877349
16837	Blue	Clear	MM	LP - 4 3/8"	Double	877228	877349
16814	Clear	Amber	PM	LP - 3 5/8"	DTQ	877226	877346
16815	Clear	Blue	PM	LP - 3 5/8"	DTQ	877226	877347
16842	Clear	Amber	MM	LP - 4 3/8"	Double	877226	877346
16843	Clear	Blue	MM	LP - 4 3/8"	Double	877226	877347
16031	Amber	Clear	PM	5 3/8"	DTQ	877211	333-C
16033	Blue	Clear	PM	5 3/8"	DTQ	877212	333-C
16032	Amber	Clear	MM	6 1/8"	Double	877211	333-C
16037	Blue	Clear	MM	6 1/8"	Double	877212	333-C
16021	Clear	Amber	PM	5 3/8"	DTQ	877213	333-A
16022	Clear	Blue	PM	5 3/8"	DTQ	877213	333-B
16026	Clear	Amber	MM	6 1/8"	Double	877213	333-A
16027	Clear	Blue	MM	6 1/8"	Double	877213	333-B

Legend: PM = Permanent Mount, MM = Magnetic Mount, LP = Low Profile
DTQ = User selectable flash patterns: double, triple or quad



Proudly
Canadian



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82


16" MINI LIGHT BARS

MINI LIGHT BARS - 16" LED


- Comes with external on/off pattern select switch #766163
- Polycarbonate outer dome, extruded aluminum base
- Dome colours available: amber, blue, clear, red
- T-Slot mounting
- Magnetic mount units supplied with 12' cigarette lighter cords, pattern select switch
- User selectable 25 patterns
- Encapsulated electronics



Optional mounting plate #98012 with C-bracket 98014 and 2 clamp kits 98009

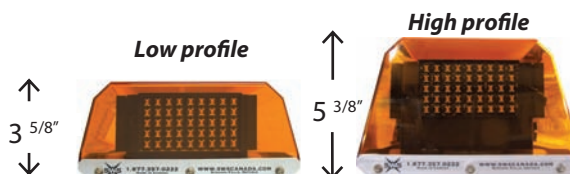

AVAILABLE IN LOW AND HIGH PROFILE CONFIGURATIONS!

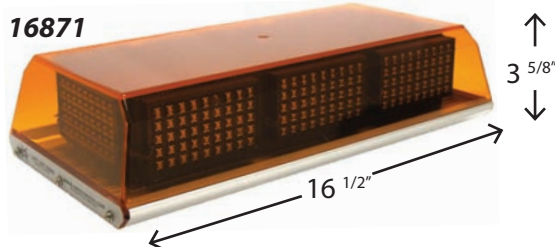

16000 Series

Model #	Dome Colour	LED Colour	Volts DC	# of LED Panels	Mounting	Height	Replacement Domes
16051	Amber	Amber	12	8	PM	5 3/8"	877211
16053	Blue	Blue	12	8	PM	5 3/8"	877212
16052	Amber	Amber	12	8	MM	6 1/8"	877211
16056	Blue	Blue	12	8	MM	6 1/8"	877212
16041	Clear	Amber	12	8	PM	5 3/8"	877213
16042	Clear	Blue	12	8	PM	5 3/8"	877213
16046	Clear	Amber	12	8	MM	6 1/8"	877213
16047	Clear	Blue	12	8	MM	6 1/8"	877213
16601	Amber	Amber	12	14	PM	5 3/8"	877211
16602	Amber	Amber	12	14	MM	6 1/8"	877211
16600	Clear	Amber	12	14	PM	5 3/8"	877213
16071	Amber	Amber	24	8	PM	5 3/8"	877211
16604	Amber	Amber	24	14	PM	5 3/8"	877211
16871	Amber	Amber	12	8	PM	LP - 3 5/8"	877227
16885	Blue	Blue	12	8	PM	LP - 3 5/8"	877228
16876	Amber	Amber	12	8	MM	LP - 4 3/8"	877227
16877	Blue	Blue	12	8	MM	LP - 4 3/8"	877228
16875	Clear	Amber	12	8	PM	LP - 3 5/8"	877226
16882	Clear	Blue	12	8	PM	LP - 3 5/8"	877226
16884	Clear	Amber/Blue	12	8	PM	LP - 3 5/8"	877226
16886	Clear	Amber	12	8	MM	LP - 4 3/8"	877226
16887	Clear	Blue	12	8	MM	LP - 4 3/8"	877226
16890	Amber	Amber	24	8	PM	LP - 3 5/8"	877227
16891	Blue	Blue	24	8	PM	LP - 3 5/8"	877228
16894	Amber	Amber	24	8	MM	LP - 4 3/8"	877227
16895	Blue	Blue	24	8	MM	LP - 4 3/8"	877228

Legend: PM = Permanent Mount, MM = Magnetic Mount, LP = Low Profile



Proudly
Canadian



Switching
Available
p. 78



Mounting
Solutions
Available
p. 82

MINI LIGHT BARS - 16" LED

- 16" LED mini light bars
- 12Vdc
- 0.5 - 2.5 Amps (depending on pattern)
- Encapsulated electronics and LEDs
- T-slot mounting
- 20' cable
- Aluminum base
- Polycarbonate dome

16072



- 8 Standard LED panels
- 8 Sets of triple hi power LEDs
- 25 user selectable patterns
- Comes with switch #766163

16073



- 8 Standard LED panels
- 4 Sets of triple hi power LEDs (front and rear only)
- 25 user selectable patterns


16881



- Combination red/blue LEDs
- 8 split LED panels (top red, bottom blue)
- 3 user selectable patterns
- Supplied switching allows colours to run simultaneously or independently

Model #	Dome Colour	LED Colour	Volts DC	# of LED Panels	# of High Power Sets	Height	Replacement Domes
16072	Amber	Amber	12	8	8	5 3/8"	877211
16073	Amber	Amber	12	8	4	5 3/8"	877211
16075	Clear	Amber	12	8	8	5 3/8"	877226
16884	Clear	Amber/Blue	12	8	n/a	LP - 3 5/8"	877226
16881	Clear	Red/Blue	12	8	n/a	LP - 3 5/8"	877226

16751

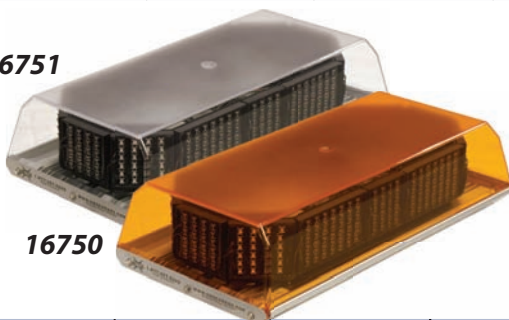

16750

EXCELLENT CORNER AND INTERSECTION COVERAGE!

- 25 user selectable patterns
- Encapsulated electronics and LED panels
- T-slot or magnetic mount available
- Comes with on/off and pattern select switch #766163

Model #	Dome Colour	LED Colour	Volts DC	# of LED Panels	Mounting	Max. Amps	Height	Replacement Domes
16750	Amber	Amber	12	12	PM	0.5 - 2.5	LP - 3 5/8"	877227
16751	Clear	Amber	12	12	PM	0.5 - 2.5	LP - 3 5/8"	877226
16752	Blue	Blue	12	12	PM	0.5 - 2.5	LP - 3 5/8"	877228
16753	Clear	Blue	12	12	PM	0.5 - 2.5	LP - 3 5/8"	877226
16754	Amber	Amber	12	12	MM	0.5 - 2.5	LP - 4 3/8"	877227
16755	Clear	Amber	12	12	MM	0.5 - 2.5	LP - 4 3/8"	877226
16756	Blue	Blue	12	12	MM	0.5 - 2.5	LP - 4 3/8"	877228
16757	Clear	Blue	12	12	MM	0.5 - 2.5	LP - 4 3/8"	877226

Legend: PM = Permanent Mount, MM = Magnetic Mount, LP = Low Profile



Proudly
Canadian



Switching
Solutions
Available
p.78




Mounting
Solutions
Available
p.82

16" MINI LIGHT BARS

MINI LIGHT BARS - 16" LED

- 10 - 30 Vdc
- 0.2 - 1.2A @ 12Vdc
- 0.2 - 2.2A @ 12Vdc
- High Intensity LED mini bars
- Low and high profile models available
- Multiple user selectable flash patterns
- Heavy duty extruded anodized aluminum base
- Available dome colours: amber, red, blue, clear
- Available lens colours: amber, red, blue, clear
- Available LED colours: amber, blue

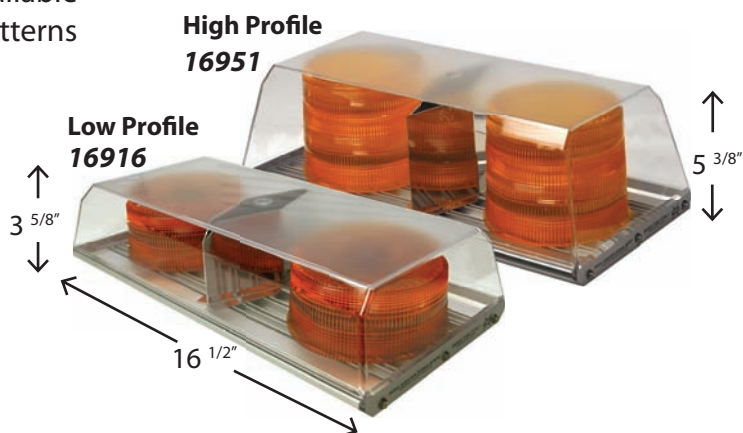

16000 Series

Replacement parts

Part #	Dome Colour	Lens Colour	LED Colour	Mounting	Height	Max Amps @12Vdc	Lens	Dome
Low Profile Series								
16915	Amber	Amber	Amber	PM	LP - 3 5/8"	0.2 - 1.2	877461	877227
16916	Clear	Amber	Amber	PM	LP - 3 5/8"	0.2 - 1.2	877461	877226
16917	Amber	Amber	Amber	MM	LP - 4 3/8"	0.2 - 1.2	877461	877227
16918	Clear	Amber	Amber	MM	LP - 4 3/8"	0.2 - 1.2	877461	877226
16919	Clear	Amber/Blue	Amber/Blue	PM	LP - 3 5/8"	0.2 - 1.2	877461 / 877463	877226
16920	Clear	Amber/Blue	Amber/Blue	MM	LP - 4 3/8"	0.2 - 1.2	877461 / 877463	877226
16921	Blue	Blue	Blue	PM	LP - 3 5/8"	0.2 - 1.2	877463	877228
16922	Clear	Blue	Blue	PM	LP - 3 5/8"	0.2 - 1.2	877463	877226
16923	Blue	Blue	Blue	MM	LP - 4 3/8"	0.2 - 1.2	877463	877228
16924	Clear	Blue	Blue	MM	LP - 4 3/8"	0.2 - 1.2	877463	877226
High Profile Series								
16950	Amber	Amber	Amber	PM	5 3/8"	0.2 - 2.2	877453	877211
16951	Clear	Amber	Amber	PM	5 3/8"	0.2 - 2.2	877453	877213
16952	Amber	Amber	Amber	MM	6 1/8"	0.2 - 2.2	877453	877211
16953	Clear	Amber	Amber	MM	6 1/8"	0.2 - 2.2	877453	877213
16954	Clear	Amber/Blue	Amber/Blue	PM	5 3/8"	0.2 - 2.2	877453 / 877455	877213
16955	Clear	Amber/Blue	Amber/Blue	MM	6 1/8"	0.2 - 2.2	877453 / 877455	877213
16956	Blue	Blue	Blue	PM	5 3/8"	0.2 - 2.2	877455	877212
16957	Clear	Blue	Blue	PM	5 3/8"	0.2 - 2.2	877455	877213
16958	Blue	Blue	Blue	MM	6 1/8"	0.2 - 2.2	877455	877212
16959	Clear	Blue	Blue	MM	6 1/8"	0.2 - 2.2	877455	877213

Legend: PM = Permanent Mount, MM = Magnetic Mount, LP = Low Profile



Proudly
Canadian



Switching
Available
p. 78




Mounting
Solutions
Available
p. 82

24" MINI LIGHT BARS

MINI LIGHT BARS - 24" ROTATOR

- Permanent mount dimensions: 5 ³/₈" H x 24 ¹/₂" L x 8 ³/₈" D
- Magnetic mount dimensions: 5 ⁷/₈" H x 24 ¹/₂" L x 8 ³/₈" D
- Input: 24Vdc
- Polycarbonate outer dome
- Extruded aluminum base
- Dome colours available: amber, blue, clear, red
- T-slot mounting
- Encapsulated electronics
- Magnetic mount units supplied with switched 12' cigarette lighter cords
- Optional external on/off switch #766150
- Magnetic mount conversion kit #96000
- Replacement halogen bulb #2073-795
- Individual rotator speed:
standard = 85fpm, fast = 150fpm

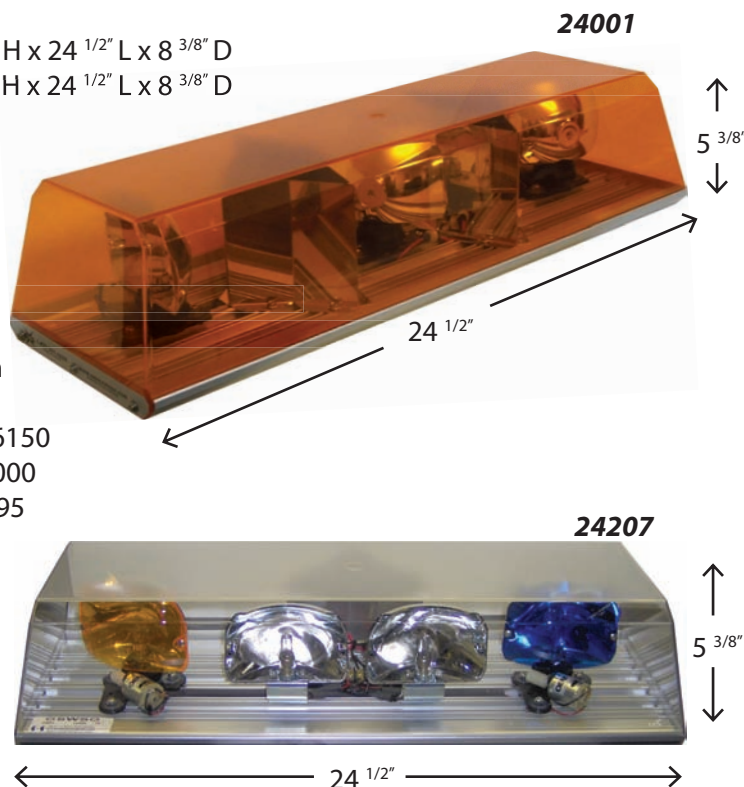

24000 Series

Model #	Outer Dome Colour	Volts DC	Max Amps	Filter Colour	# of Rotators	Mounting	Weight lbs	Replacement Dome
24002	Amber	12	8	n/a	2	PM	7.6	877201
24006	Blue	12	8	n/a	2	PM	7.6	877202
24004	Amber	12	8	n/a	2	MM	9.3	877201
24005	Blue	12	8	n/a	2	MM	9.3	877202
24102	Amber	12	8	n/a	2	PM	7.6	877201
24106	Blue	12	8	n/a	2	PM	7.6	877202
24104	Amber	12	8	n/a	2	MM	9.3	877201
24105	Blue	12	8	n/a	2	MM	9.3	877202
24101	Amber	12	12	n/a	3	PM	8.3	877201
24103	Blue	12	12	n/a	3	PM	8.3	877202
24048	Clear	12	12	Amber	3	PM	8.3	877203
24001	Amber	12	12	n/a	3	PM	8.3	877201
24003	Blue	12	12	n/a	3	PM	8.3	877202
24008	Clear	12	12	Amber	3	PM	8.3	877203
24009	Clear	12	12	Blue	3	PM	8.3	877203
24044	Amber	24	4	n/a	2	PM	7.6	877201
24045	Amber	24	6	n/a	3	PM	8.3	877201
24207	Clear	12	13	Amber/Blue	2	PM	7.6	877203
24107	Clear	12	13	Amber	2	PM	7.6	877203

Legend: PM = Permanent Mount, MM = Magnetic Mount



Proudly
Canadian



Switching
Available
p. 78




Mounting
Solutions
Available
p. 82

24" MINI LIGHT BARS

MINI LIGHT BARS - 24" STROBE

- Permanent mount dimensions: 5 3/8" H x 24 1/2" L x 8 3/8" D
- Magnetic mount dimensions: 5 7/8" H x 24 1/2" L x 8 3/8" D
- Input: 12-48Vdc
- Joules 10-22 (depending on flash pattern chosen)
- Polycarbonate outer dome
- Extruded aluminum base
- Dome colours available:
amber, blue, clear, red
- Lens colours available:
amber, blue, clear, red, green
- T-slot mounting
- Encapsulated electronics
- Optional external on/off switch #766150
- Magnetic mount conversion kit #96000
- Magnetic mount units supplied with
switched 12' cigarette lighter cords

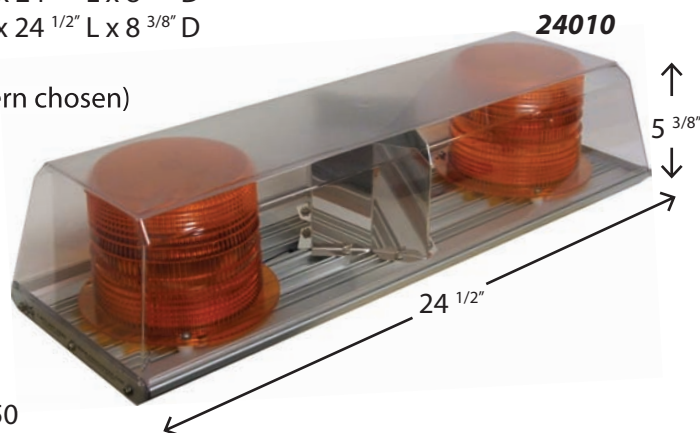

24000 Series

Model #	Outer Dome Colour	Inner Lens Colour	Mounting	Flash Patterns	Weight lbs	Replacement Parts		
						Dome	Lens	Strobe Tube
24030	Amber	Clear	PM	DSQ	10.5	877201	300-C	129-S
24051	Blue	Clear	PM	DSQ	10.5	877202	300-C	129-S
24053	Amber	Clear	MM	Single	11.3	877201	300-C	129-S
24055	Blue	Clear	MM	Single	11.3	877202	300-C	129-S
24153	Amber	Clear	MM	Double	11.3	877201	300-C	129-S
24155	Blue	Clear	MM	Double	11.3	877202	300-C	129-S
24253	Amber	Clear	MM	Quad	11.3	877201	300-C	129-S
24255	Blue	Clear	MM	Quad	11.3	877202	300-C	129-S
24010	Clear	Amber	PM	DSQ	10.5	877203	300-A	129-S
24011	Clear	Blue	PM	DSQ	10.5	877203	300-B	129-S
24015	Clear	Amber	MM	Single	11.3	877203	300-A	129-S
24016	Clear	Blue	MM	Single	11.3	877203	300-B	129-S
24115	Clear	Amber	MM	Double	11.3	877203	300-A	129-S
24116	Clear	Blue	MM	Double	11.3	877203	300-B	129-S
24215	Clear	Amber	MM	Quad	11.3	877203	300-A	129-S
24216	Clear	Blue	MM	Quad	11.3	877203	300-B	129-S

Legend: PM = Permanent Mount, MM = Magnetic Mount, DSQ = Double/Single/Quad Flash



Proudly
Canadian




Switching
Available
p. 78



Mounting
Solutions
Available
p. 82

MINI BARS - 24" LED

- Permanent mount dimensions: 5 ³/₈" H x 24 ¹/₂" L x 8 ³/₈" D
- Magnetic mount dimensions: 5 ⁷/₈" H x 24 ¹/₂" L x 8 ³/₈" D
- Encapsulated electronics
- Polycarbonate outer dome
- Extruded aluminum base
- Dome colours available: amber, blue, clear, red
- T-slot mounting
- 25 user selectable patterns
- 20' cable included
- On/off & pattern select switch with permanent mount models
- Magnetic mount units supplied with 12' cigarette lighter cords, pattern select switch
- Magnetic mount conversion kit #96000
- Maximum current varies depending on flash pattern chosen

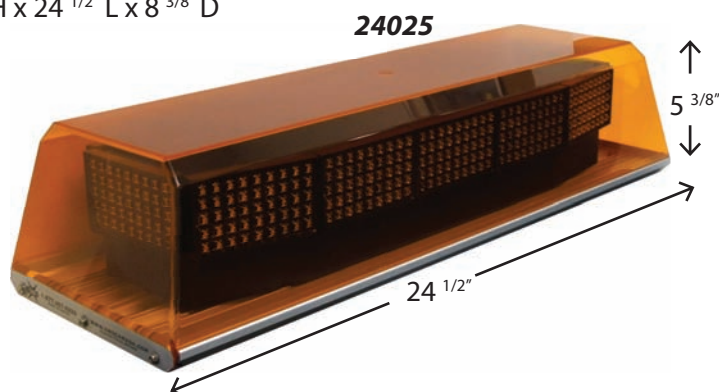

24000 Series								Replacement Dome
Model #	Dome Colour	LED Colour	Volts DC	Max Amps	# of LED Panels	Mounting	Height	
24025	Amber	Amber	12	1.5 - 3.0	12	PM	5 ³ / ₈ "	877201
24032	Blue	Blue	12	1.5 - 3.0	12	PM	5 ³ / ₈ "	877202
24028	Amber	Amber	12	1.5 - 3.0	12	MM	6 ¹ / ₈ "	877201
24021	Clear	Amber	12	1.5 - 3.0	12	PM	5 ³ / ₈ "	877203
24022	Clear	Blue	12	1.5 - 3.0	12	PM	5 ³ / ₈ "	877203
24026	Clear	Amber	12	1.5 - 3.0	12	MM	6 ¹ / ₈ "	877203
24080	Amber	Amber	12	0.3 - 9	22	PM	5 ³ / ₈ "	877201
24081	Clear	Amber	12	0.3 - 9	22	PM	5 ³ / ₈ "	877203
24082	Amber	Amber	24	1.0 - 2.0	12	PM	5 ³ / ₈ "	877201
24036	Clear	Amber	24	1.0 - 2.0	12	MM	6 ¹ / ₈ "	877203

Legend: PM = Permanent Mount, MM = Magnetic Mount



Proudly
Canadian

STAR RAZOR™ LIGHT BARS Only 2 3/4" Tall!


THE STAR RAZOR LIGHT BAR

Various lengths X 15" wide and less than 2 3/4" high!

- Wider design for better light distribution
- Ultra low profile - only 2 3/4" high!
- Strobe, Halogen and LED options available
- Super bright M-Tech high intensity linear LED heads
- Halogen Takedown/Pursuit lights
- Halogen Alley lights
- Available 4 1/2" or 7" linear strobe heads
- Available halogen intersection clearing lights
- Custom light bar configurations are available, contact factory direct




STAR RAZOR™ 36" EMERGENCY PACKAGES

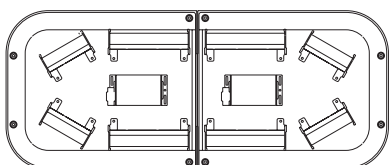


2300SL

Four 7" linear strobe heads, four 4.5" linear strobe heads, two 4-head strobe paks

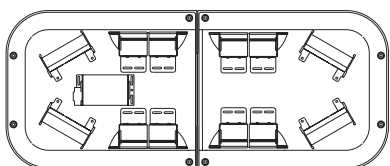

2300SLD

Eight M-Tech LED heads, four 4.5" linear strobe heads, one 4-head strobe pak

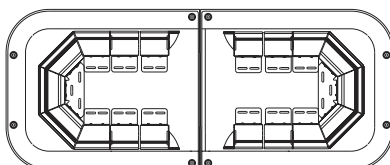

2300LED

Eighteen M-Tech LED heads




Proudly
Canadian

STAR RAZOR™ LIGHT BARS Only 2 3/4" Tall!




STAR RAZOR™ 46" EMERGENCY PACKAGES

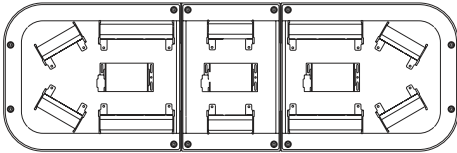


2400SL

Four 7" linear strobe heads, six 4.5" linear strobe heads, two 4-head strobe paks, one 2-head strobe pak

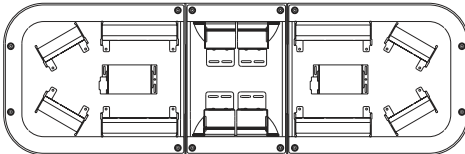


2400SLD

Four M-Tech LED heads, four 7" linear strobe heads, four 4.5" linear strobe heads, two 4-head strobe paks

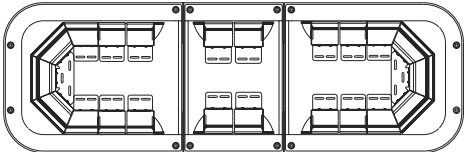


2400LED

Twenty-two M-Tech LED heads

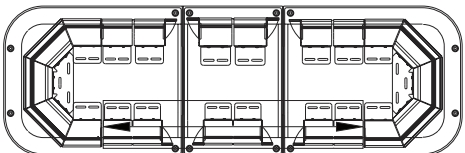


2401LED

One array M-Tech traffic director, sixteen M-Tech LED heads

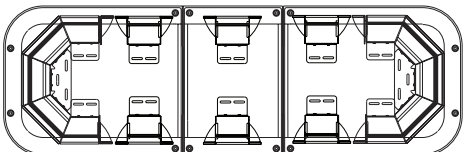


2410LED

Fourteen M-Tech LED heads, two alley lights

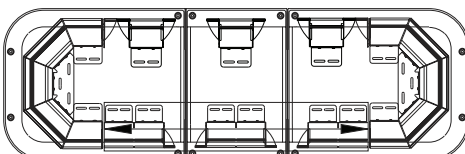


2411LED

One array M-Tech traffic director, eleven M-Tech LED heads, two alley lights

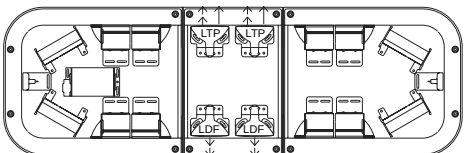

2420SLD

Eight M-Tech LED heads, two takedown/pursuit lights, two directional flashers, two alley lights, four 4.5" linear strobe heads, one 4-head strobe pak

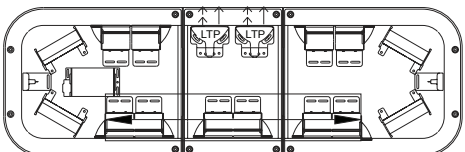

2421SLD

One array M-Tech traffic director, four M-Tech LED heads, four 4.5" linear strobe heads, two alley lights, two takedown/pursuit lights, one 4-head strobe pak




Proudly Canadian

STAR RAZOR™ LIGHT BARS Only 2 3/4" Tall!




STAR RAZOR™ 56" EMERGENCY/TOW PACKAGES




2500SL

Eight 4.5" linear strobe heads, four 7" linear strobe heads, three 4-head strobe packs




2500SLD

Eight M-Tech LED heads, four 7" linear strobe heads, four 4.5" linear strobe heads, two 4-head strobe packs




2500LED

Twenty-six M-Tech LED heads



2510SL

Four 7" linear strobe heads, four 4.5" linear strobe heads, two 4-head strobe packs, two rear work lights



2510LED

Eighteen M-Tech LED heads, two work light/takedown lights

STAR RAZOR™ LEGEND



4.5" Linear Strobe
(SH3924)



7" Linear Strobe
(SH3927)



Directional Halogen
(220-14LDH)



Takedown/Pursuit
(220-14LTP)



Directional Flasher
(220-14LDF)



Stop/Turn/Tail
(220-14STT)



Alley Light
(220-50)



Alley Light
(Fits w/220-D2)
(220-50-1)



Colour Filter for
Hal/Incand. Light
(820-100LL)



Linear Strobe Filter
(4.5" LSF4.5-5")
(7" LSF7-5")



Left LED End Cap w/Lens
(220-ECL)



Right LED End Cap w/Lens
(220-ECR)



4-Head Remote Pak
(RP249-L)



2-Head Remote Pak
(RP249A-L)



End LED 3 Unit
(220-D3)



End LED 2 Unit
(220-D2)



LED Head
(220-D1)



LED Head w/ Left Angle
(220-D1AL)



LED Head w/ Right Angle
(220-D1AR)



LED Head w/ Left End Cap
(220-D1LEC)



LED Head w/ Right End Cap
(220-D1REC)



LED Head w/ End Caps
(220-D3)



6 Array M-Tech Traffic Director
(220-D1TDK)

SABRE™ LIGHT BARS


The only dual level, full output light with rotators less than 4" tall!

Various lengths by 15" wide and 4" high!

- Wider design for better light distribution
- Full output, dual level
- Designed for heavy duty applications
- New M-Tech™ LED technology
- Separate operation of lighting components
- Star Diamond coated, virgin Lexan™ injected molded domes are fully gasketed to protect against moisture
- One piece extruded, anodized aluminum base
- Adjustable lower level lights allow optimal positioning of light output
- 27 Watt halogen alley and takedown/pursuit lights
- All strobe heads, LED heads and power supplies feature encapsulated circuits
- Internal LED traffic director available
- The lenses and filters for all Sabre light bars are available in red, blue, amber, green and clear




STAR SABRE™ 36" EMERGENCY PACKAGES

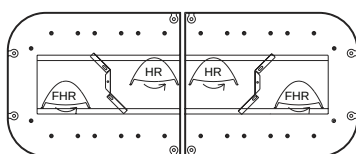


5300H

Two halogen rotators, two fast halogen rotators, two Z-mirrors

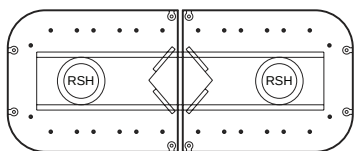

5300S

Two 360° remote strobe heads, one 2-head strobe pak, two large V-mirrors

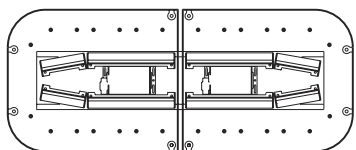

5300SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks




Proudly
Canadian

SABRE™ LIGHT BARS

The only dual level, full output light with rotators less than 4" tall!




STAR SABRE™ 46" EMERGENCY PACKAGES




5400H

Two halogen rotators, two fast halogen rotators, two large V-mirrors, two Z-mirrors

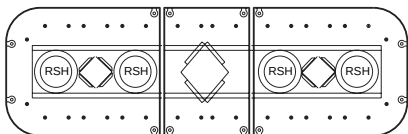


5400S

Four 360° remote strobe heads, two large V-mirrors, two double V-mirrors, two 2-head strobe paks

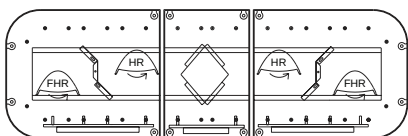


5401H

Two halogen rotators, two fast halogen rotators, two large V-mirrors, two Z-mirrors, lower LED directional arrow assembly

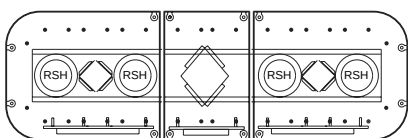


5401S

Four 360° remote strobe heads, two double V-mirrors, two large V-mirrors, two 2-head strobe paks, lower LED directional arrow assembly

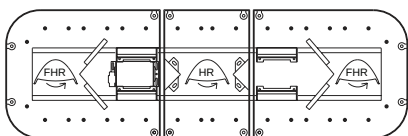


5402HSL

One halogen rotator, two fast halogen rotators, two large V-mirrors, two small V-mirrors, four 4.5" linear strobe heads, one 4-head strobe pak

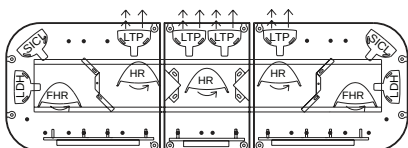


5421H

Three halogen rotators, two fast halogen rotators, two Z-mirrors, two small V-mirrors, two strobe intersection clearing lights, four front lower takedown/pursuit lights, two alley lights, lower LED directional arrow assembly

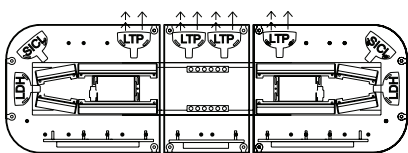

5421SLD

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two strobe intersection clearing lights, two high intensity 6-array linear LED heads, two alley lights, four front lower takedown/pursuit lights, lower LED directional arrow assembly

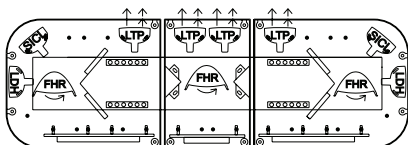


5421HLD


Three fast halogen rotators, two large V-mirrors, two small V-mirrors, four high intensity 6-array linear LED heads, two strobe intersection clearing lights, two alley lights, four front lower takedown/pursuit lights, lower LED directional arrow assembly

SABRE™ LIGHT BARS

The only dual level, full output light with rotators less than 4" tall!

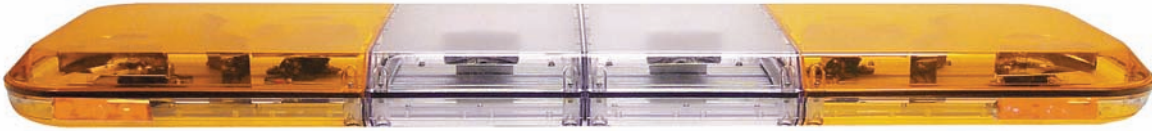


STAR SABRE™ 56" EMERGENCY/TOW PACKAGES

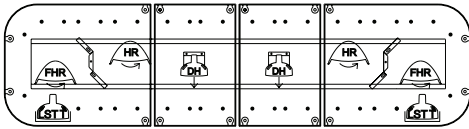


5510H

Two halogen rotators, two fast halogen rotators, two Z-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights

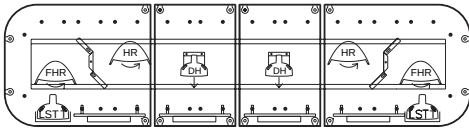


5511H

Two halogen rotators, two fast halogen rotators, two Z-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights, lower LED directional arrow assembly

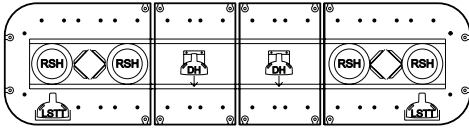


5510S

Four 360° remote strobe heads, two double V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights

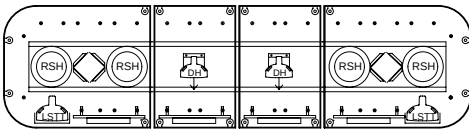


5511S

Four 360° remote strobe heads, two double V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights, lower LED directional arrow assembly

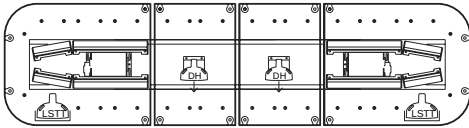


5510SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two rear directional halogen flood lights, two lower stop/turn/tail lights

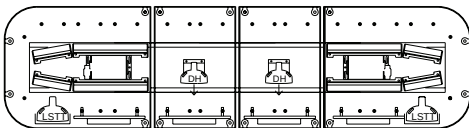


5511SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two rear directional halogen flood lights, two lower stop/turn/tail lights, lower LED directional arrow assembly

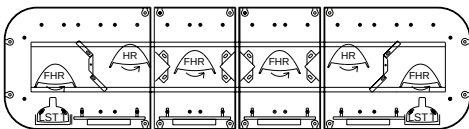

5521H

Four fast halogen rotators, two halogen rotators, two Z-mirrors, four small V-mirrors, two lower stop/turn/tail lights, lower LED directional arrow assembly

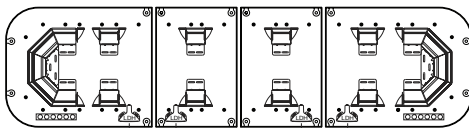

5550LED

Sixteen amber M-tech LED's, four lower rear floods, lower level, LED stop/tail/turn lights




Proudly Canadian

SABRE™ LIGHT BARS

The only dual level, full output light with rotators less than 4" tall!




STAR SABRE™ 46" & 56" LED PACKAGES

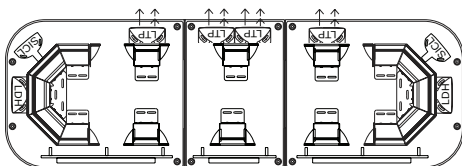


5401 LED

Fourteen M-Tech LEDs, four front lower takedown/pursuit lights, two strobe intersection clearing lights, two alley lights, one lower LED directional arrow assembly

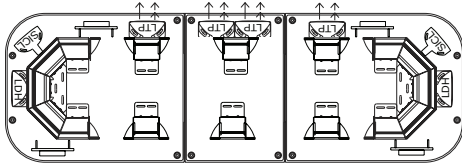


5410 LED

Fourteen M-Tech LEDs, four front lower takedown/pursuit lights, two strobe intersection clearing lights, two alley lights, two front lower LEDs, two rear lower LEDs

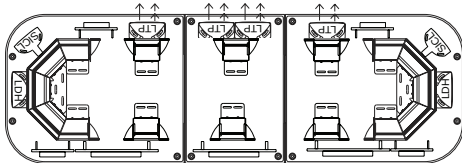


5411 LED

Fourteen M-Tech LEDs, four front lower takedown/pursuit lights, two strobe intersection clearing lights, two alley lights, two front lower LEDs, two rear lower LEDs, one (6) array lower LED directional arrow assembly

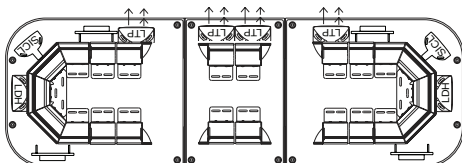


5420 LED

Twenty M-Tech LEDs, four front lower takedown/pursuit lights, two strobe intersection clearing lights, two alley lights, two front lower LEDs, two rear lower LEDs

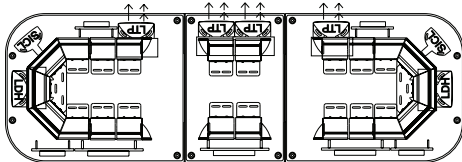

5421 LED

Twenty M-Tech LEDs, four front lower takedown/pursuit lights, two strobe intersection clearing lights, two alley lights, two front lower LEDs, two rear lower LEDs, one (6) array lower LED directional arrow assembly

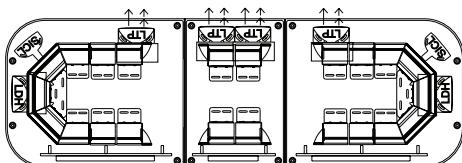

5431 LED

Twenty M-Tech LEDs, four front lower takedown/pursuit lights, two strobe intersection clearing lights, two alley lights, one lower LED directional arrow assembly

M-TECH LED FEATURES

- High intensity, high power LEDs
- High shock and vibration protection
- No bulb replacement ever required!
- Long life LED's (100,000 hours)
- Solid state circuitry
- No filaments to damage
- Very low current draw minimizing heat build-up
- Compact modules offer greater flexibility in Light bar configurations




SABRE™ LIGHT BARS

The only dual level, full output light with rotators less than 4" tall!




STAR SABRE™ 66" EMERGENCY/TOW PACKAGES

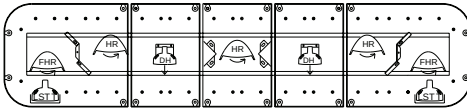


5610H

Three halogen rotators, two fast halogen rotators, two Z-mirrors, two small V-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights

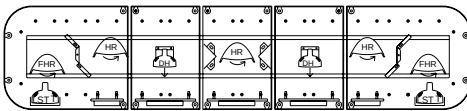


5611H

Three halogen rotators, two fast halogen rotators, two Z-mirrors, two small V-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights, lower LED directional arrow assembly

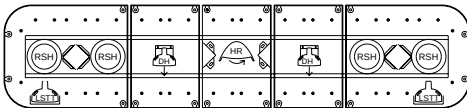


5610S

Four 360° remote strobe heads, one halogen rotator, two double V-mirrors, two small V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights

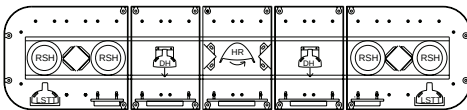


5611S

Four 360° remote strobe heads, one halogen rotator, two double V-mirrors, two small V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights, lower LED directional arrow assembly

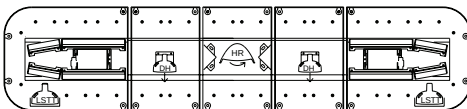

5610SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, one halogen rotator, two small V-mirrors, two rear directional halogen flood lights, two 4-head strobe paks, two lower stop/turn/tail lights

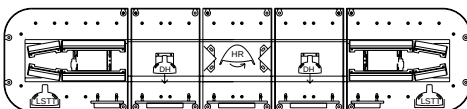

5611SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, one halogen rotator, two small V-mirrors, two directional halogen flood lights, two 4-head strobe paks, two lower stop/turn/tail lights, lower LED directional arrow assembly

CUSTOM DESIGN YOUR OWN LIGHT BAR!

Star light bars are offered in four lengths in which you can place the components you feel most suit your particular needs. Mix and match optional equipment to your specifications! Call one of our customer service representatives to aid in designing your custom bar



Proudly
Canadian

SABRE™ LIGHT BARS

The only dual level, full output light with rotators less than 4" tall!



STAR SABRE™ LEGEND



Halogen Rotator
(520-99)



Fast Halogen Rotator
(520-99F)



360 degree Remote
Strobe Head
(ST3901-7)



Directional Halogen Flasher
(520-51F)



Takedown/Pursuit
(520-51HP)



Directional Halogen
Flood/Takedown
(520-51)



Double Medium V-Mirror
(520-292)



Medium V-Mirror
(520-29)



Large V-Mirror
(520-29-2)



Little V-Mirror
(520-29-1)



Z-Mirror
(520-2L/520-2R)



Lower Stop/Turn/Tail
(820-14STT)



Rotator Colour Filter
(520-100)




Intersection Clearing Light
(820-14ICL)



Strobe Intersection Clearing Light
(820-14SH)



4.5" Linear Strobe
(SH3954)



7" Linear Strobe
(SH3957)



Directional Halogen
(220-14LDH)



Takedown/Pursuit
(220-14LTP)




Directional Flasher
(220-14LDF)



Stop/Turn/Tail
(220-14STT)



Colour Filter for
Hal/Incand. Light
(820-100LL)



Linear Strobe Filter
(4.5" LSF4.5-5-")
(7" LSF7-5-")



Left LED End Cap w/Lens
(220-ECL)



Right LED End Cap w/Lens
(220-ECR)



4-Head Remote Pak
(RP249-L)



2-Head Remote Pak
(RP249A-L)



Strobe ICL Pak
(RP310-ICL)



LED Head
(520-D1)



LED Head w/ Left Angle
(520-D1AL)



LED Head w/ Right Angle
(520-D1AR)



LED Head w/ Left End Cap
(520-D1AR)



LED Head w/ Right End Cap
(520-D1REC)




LED Head w/ End Caps
(520-D1EC)



End LED 3 Unit
(520-D3)



Lower Directional Arrow Assembly w/ Coloured Lenses
(820-14TDAK)



Lower LED Directional Arrow Assembly - Amber
(820-14TDK46, 56, or 66)




LED Array
(820-14D1)




Proudly
Canadian

“WRECKER SPECIAL” SABRE™ LIGHT BAR




5510H

Two halogen rotators, two fast halogen rotators, two Z-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights




5510SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two rear directional halogen flood lights, two lower stop/turn/tail lights



5550LED

Sixteen amber M-tech LEDs, four lower rear floods, lower level LED stop/tail/turn lights with 6 high brightness LEDs per side



5552LED

Twelve amber M-tech LEDs, four lower rear floods, lower level LED stop/tail/turn lights with 3 high brightness LEDs per side




Proudly
Canadian

INTERCEPTOR™ LIGHT BARS

only 5" tall!




INTERCEPTOR™ 36" EMERGENCY PACKAGES

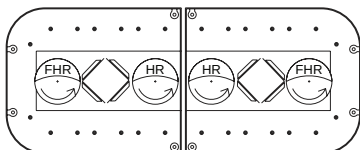


8300H

Two halogen rotators, two fast halogen rotators, two double V-mirrors

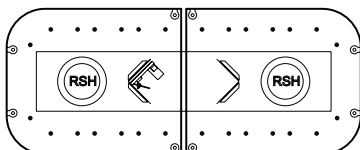

8300S


Two 360° remote strobe heads, one 2-head strobe pak, two V-mirrors

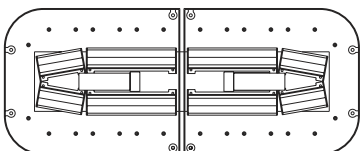

8300SL


Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks

INTERCEPTOR™ 46" EMERGENCY PACKAGES

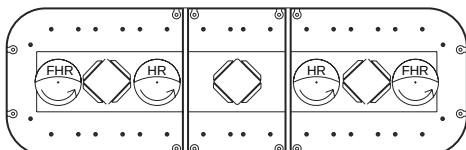


8400H

Two halogen rotators, two fast halogen rotators, three double V-mirrors

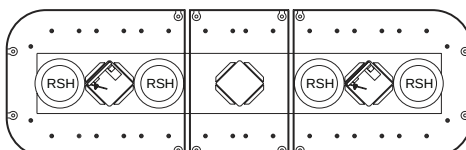


8400S

Four 360° remote strobe heads, three double V-mirrors, two 2-head strobe paks

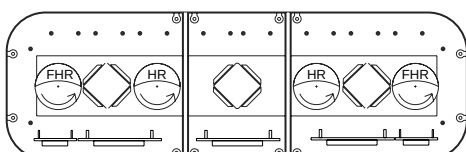

8401H

Two halogen rotators, two fast halogen rotators, three double V-mirrors, lower LED directional arrow assembly

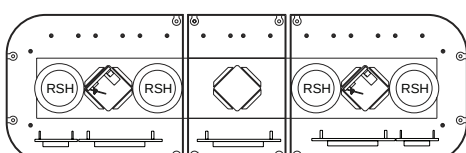

8401S


Four 360° remote strobe heads, three double V-mirrors, two 2-head strobe paks, lower LED directional arrow assembly




8402HSL

One halogen rotator, two fast halogen rotators, two large V-mirrors, two small V-mirrors, four 4.5" linear strobe heads, one 4-head strobe pak

INTERCEPTOR™ LIGHT BARS

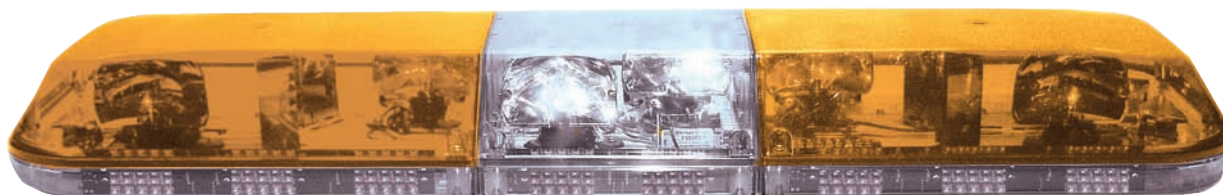


INTERCEPTOR™ 46\"/>

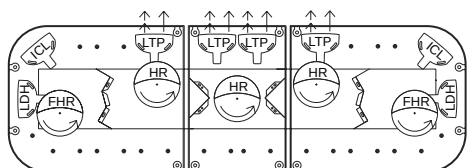


8420H

Three halogen rotators, two fast halogen rotators, two lightning mirrors, two medium V-mirrors, two intersection clearing lights, four front lower takedown/pursuit lights, two alley lights

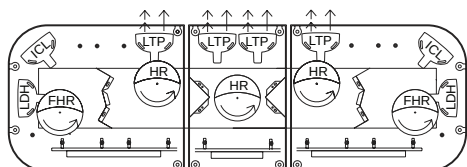


8421H

Three halogen rotators, two fast halogen rotators, two lightning mirrors, two medium V-mirrors, two intersection clearing lights, four front lower takedown/pursuit lights, two alley lights, lower LED directional arrow assembly

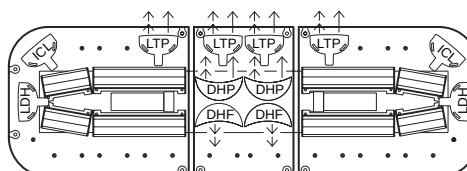


8420SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two intersection clearing lights, two front takedown/pursuit lights, two rear directional halogen flashers, two alley lights, four front lower takedown/pursuit lights

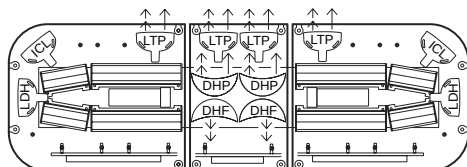


8421SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two intersection clearing lights, two front takedown/pursuit lights, lower LED directional arrow assembly

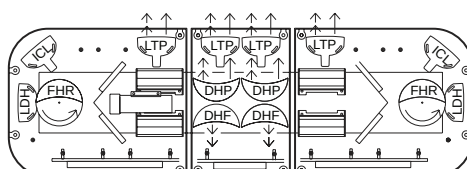


8421HSL

Four 4.5" linear strobe heads, one 4-head strobe pak, two large V-mirrors, two fast halogen rotators, two intersection clearing lights, two front takedown/pursuit lights, two rear directional halogen flashers, two alley lights, four front lower takedown/pursuit lights, lower LED directional arrow assembly

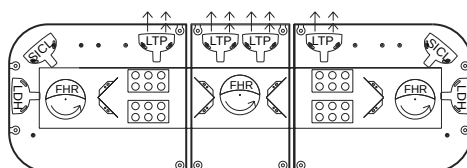

8420HLD

Four linear LED heads, three fast halogen rotators, two strobe intersection clearing lights, two alley lights, four front lower takedown/pursuit lights, four medium V-mirrors

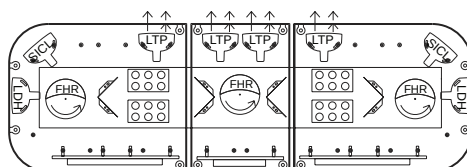

8421HLD

Four linear LED heads, three fast halogen rotators, two strobe intersection clearing lights, two alley lights, four front lower takedown/pursuit lights, four medium V-mirrors, lower LED directional arrow assembly




Proudly
Canadian

INTERCEPTOR™ LIGHT BAR




INTERCEPTOR™ 56" EMERGENCY/TOW PACKAGES




8510H

Two halogen rotators, two fast halogen rotators, two double V-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights




8511H

Two halogen rotators, two fast halogen rotators, two double V-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights, lower LED directional arrow assembly




8510S

Four 360° remote strobe heads, two double V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights




8511S

Four 360° remote strobe heads, two double V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights, lower LED directional arrow assembly




8510SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two rear directional halogen flood lights, two lower stop/turn/tail lights



8511SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, two 4-head strobe paks, two rear directional halogen flood lights, two lower stop/turn/tail lights, lower LED directional arrow assembly




8521H

Four fast halogen rotators, two halogen rotators, two double V-mirrors, two wall mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights. Lower LED directional arrow assembly


SPEAKER OPTION

If you require a speaker option in your interceptor bar call one of our customer service representatives at 1-877-357-0222

INTERCEPTOR™ LIGHT BARS

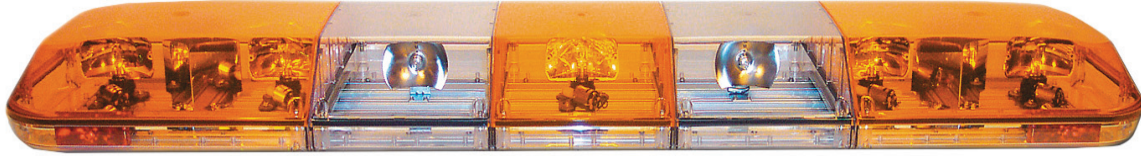


INTERCEPTOR™ 66" EMERGENCY/TOW PACKAGES




8610H

Three halogen rotators, two fast halogen rotators, two double V-mirrors, two medium V-mirrors, two lower stop/turn/tail lights, two rear directional halogen flood lights




8611H

Three halogen rotators, two fast halogen rotators, two double V-mirrors, two medium V-mirrors, two rear directional halogen flood lights, two lower stop/turn/tail lights, lower LED directional arrow assembly




8610S

Four 360° remote strobe heads, one halogen rotator, two double V-mirrors, two medium V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights




8611S

Four 360° remote strobe heads, one halogen rotator, two double V-mirrors, two medium V-mirrors, two rear directional halogen flood lights, two 2-head strobe paks, two lower stop/turn/tail lights, lower LED directional arrow assembly



8610SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, one halogen rotator, two medium V-mirrors, two rear directional halogen flood lights, two 4-head strobe paks, two lower stop/turn/tail lights



8611SL

Four 4.5" linear strobe heads, four 7" linear strobe heads, one halogen rotator, two medium V-mirrors, two directional halogen flood lights, two 4-head strobe paks, two lower stop/turn/tail lights, lower LED directional arrow assembly

INTERCEPTOR™ LEGEND



Fast Halogen Rotator
(920-99F)



Work Light/Takedown
(920-51)



Flasher/Pursuit Light
(920-51F)



Takedown/Pursuit Light
(920-51HP)



360 degree Remote
Strobe Head
(ST3901-7)



4.5" Linear Strobe
(SH3964)



7" Linear Strobe
(SH3967)



2-Head Remote Strobe Pak
(RP248A)



4-Head Remote Strobe Pak
(RP248)



Double Medium V-Mirror
(820-292)



Center V-Mirror
(820-29C)



Medium V-Mirror
(820-29)



Large V-Mirror
(920-29)



Lightning Mirror
(820-2L/2R)



Rotator Colour Filter
(920-100)



Linear 6-Array LED Head
(LDH3966)



Wall Mirror
(920-30L/920-30R)



Colour Filter for Hal/Incand. Light
(820-100LL)




Strobe ICL Pak
(RP310-ICL)



Intersection Clearing Light
(820-14ICL)



Strobe Intersection Clearing Light
(820-14SH)



Lower LED Directional Arrow Assembly - Amber
(820-14TDK46, 56, or 66)



Proudly
Canadian

STAR BAR™ LIGHT BARS


36" WARNING PACKAGES



Model 9300H



9304H (4) halogen rotators
(2) diamond-shaped mirrors




9304S (4) 360° strobes, (2) power pak
(2) diamond-shaped mirrors




Model 9400HS


48" WARNING PACKAGES




9400H (2) halogen rotators
(2) V-shaped mirrors
(2) wall style mirrors




9404S (4) 360° strobes, (2) power paks
(2) diamond-shaped mirrors
(2) V-shaped mirrors



9400S (2) 360° strobes, (1) power pak
(2) V-shaped mirrors
(2) wall style mirrors



9400HS (2) halogen rotators, (2) 360° strobes,
(1) power pak, (2) V-shaped mirrors,
(2) diamond-shaped mirrors,



9404H (4) halogen rotators
(2) diamond-shaped mirrors
(2) V-shaped mirrors




9408H (8) halogen rotators

STAR BAR™ LIGHT BARS




Model 9500S

58" WARNING PACKAGES



9500H

- (6) halogen rotators
- (2) diamond-shaped mirrors
- (2) V-shaped mirrors



9500S

- (6) 360° strobes, (3) power paks
- (2) diamond-shaped mirrors
- (2)-V-shaped mirrors




photo courtesy of www.backrack.ca




Model 9411S

48" TOW PACKAGES



9411H

- (2) halogen rotators, (2) V-shaped mirrors
- (2) stop/turn taillights
- (3) I.D. lights, (2) rear flood lights
- (2) wall mirrors




9411S

- (2) 360° strobes, (2) V-shaped mirrors,
- (1) power pak, (2) stop/turn taillights,
- (3) I.D. lights, (2) rear flood lights
- (2) wall mirrors




Proudly
Canadian

STAR BAR™ LIGHT BARS

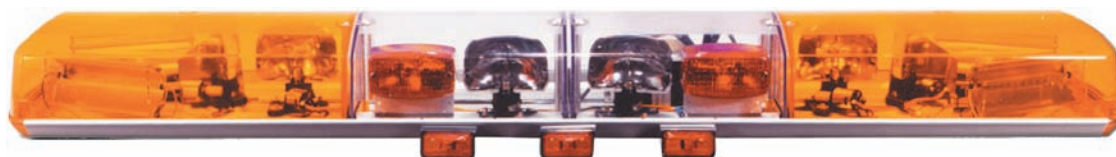


Model 9400HS

58" TOW PACKAGES




9511H

- (2) halogen rotators, (2) V-shaped mirrors
- (2) stop/turn taillights
- (3) I.D. lights, (2) rear flood lights
- (2) wall mirrors




9512H

- (4) halogen rotators
- (2) diamond-shaped mirrors
- (2) stop/turn taillights
- (3) I.D. lights, (2) rear flood lights




9512S

- (4) 360° strobes, (2) power paks
- (2) diamond-shaped mirrors
- (2) stop/turn taillights
- (3) I.D. lights, (2) rear flood lights



9512HS

- (2) halogen rotators, (2) 360° strobes,
- (1) power pak, (2) diamond-shaped mirrors
- (2) stop/turn taillights
- (3) I.D. lights, (2) rear flood lights



9530S

- (4) directional strobe heads
- (2) power paks
- (2) halogen rotators, (2) V-shaped mirrors
- (2) stop/turn taillights, (3) I.D. lights
- (2) rear flood lights

STAR BAR™ LIGHT BARS



Model 9422HS

48" EMERGENCY PACKAGES




- (5) halogen rotators
- (2) diamond-shaped mirrors

9420H




- (1) halogen rotator
- (4) 360° strobes, (2) power paks
- (2) diamond-shaped mirrors

9420HS



- (4) halogen rotators
- (2) diamond-shaped mirrors
- (4) alley lights, (2) takedown lights

9422H



- (2) fast halogen rotators, (2) halogen rotators
- (2) diamond-shaped mirrors, (4) alley lights
- (2) takedown lights, (2) rear flashers

9424H




Model 9523S

58" EMERGENCY PACKAGES



- (6) halogen rotators
- (2) diamond-shaped mirrors
- (4) V-shaped mirrors

9523H



- (6) 360° strobes, (3) power paks
- (2) diamond-shaped mirrors
- (4) V-shaped mirrors

9523S



Proudly
Canadian


SPECIFICATIONS FOR STAR BARS

Specifications for the 9000 Series

Model	Amps	Dimensions	Shipping Weight
9304H	8	5" H x 11" W x 36" L	20 lbs.
9304S	2.5	5" H x 11" W x 36" L	20 lbs.
9400H	8	5" H x 11" W x 48" L	30 lbs.
9400S	2.5	5" H x 11" W x 48" L	30 lbs.
9400HS	10.5	5" H x 11" W x 48" L	30 lbs.
9404H	16	5" H x 11" W x 48" L	30 lbs.
9404S	5	5" H x 11" W x 48" L	30 lbs.
9408H	32	5" H x 11" W x 48" L	30 lbs.
9411H	19	5" H x 11" W x 48" L	30 lbs.
9411S	13	5" H x 11" W x 48" L	30 lbs.
9420H	20	5" H x 11" W x 48" L	30 lbs.
9420HS	9	5" H x 11" W x 48" L	30 lbs.
9422H	26	5" H x 11" W x 48" L	30 lbs.
9424H	26	5" H x 11" W x 48" L	30 lbs.
9500H	24	5" H x 11" W x 58" L	42 lbs.
9500S	7.5	5" H x 11" W x 58" L	42 lbs.
9511H	19	5" H x 11" W x 58" L	42 lbs.
9512H	27	5" H x 11" W x 58" L	42 lbs.
9512S	16	5" H x 11" W x 58" L	42 lbs.
9512HS	20.5	5" H x 11" W x 58" L	42 lbs.
9523H	24	5" H x 11" W x 58" L	42 lbs.
9523S	7.5	5" H x 11" W x 58" L	42 lbs.
9530S	21.5	5" H x 11" W x 58" L	42 lbs.

Custom Design your own Bar Lights!

Star offers four lengths in which you can place the components you feel most suit *your* particular needs. Mix and match optional equipment to *your* specifications!

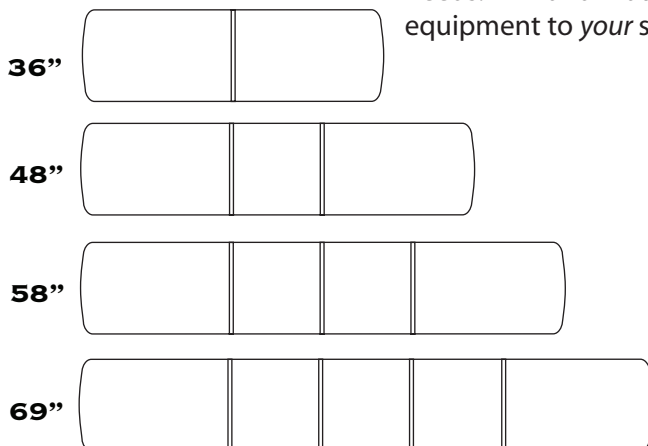



















OPTIONS

Halogen Rotator #920-99	
Fast Halogen Rotator #920-99F	
360° Remote Strobe Head #3901-11	
Directional Halogen Flood/Takedown Light #920-51	
Takedown/Pursuit Light #920-51HP	
Directional Halogen Flasher #920-51F	
Directional Strobe Head #3961-C-Colour	
Diamond-Shaped Mirror #920-292	
V-Shaped Mirror #920-29	
Wall Mirror #920-30	
Rotator Colour Filter #920-100	
Directional Colour Filter #920-101	
Stop-Tail-Turn Light #920-32	
Alley Light #920-50	
I.D. Marker Light #920-36	
Power Pak #181-147	

Replacement Parts

End Domes.....	920-21
Center Domes.....	920-22
Inner Lens.....	333-Colour
Strobe Tube.....	3901-11
50 Watt Halogen	2073-795
35 Watt Halogen	2073-796
Linear Strobe Tube	LST129-7
20 Watt Halogen	2073-59013
Alley Light Bulb	

LIGHT BAR MOUNTING

920-35 	920-35CVLP 	920-35F4 	920-35GM5 	920-35I6 	920-35M1 
920-35C 	920-35D 	920-35FT 	920-35I 	920-35INT 	920-35RM2 
920-35C5 	920-35EX 	920-35GM 	920-35IZ 		920-35RM5 
920-35CTB 	920-35F 	920-35GM2 			920-35-S105 

VEHICLE MOUNT APPLICATIONS

Make	Model	Style	Beg. Year	Thru Year	Roof Width	SVP Model #
CHEVROLET	Avalanche	Wrap-around Doors	2002	2005	51"	920-35-S105
CHEVROLET	C/K Pickup 1500	Wrap-around Doors	1999	2004	52"	920-35-S105
CHEVROLET	C/K Pickup 2500, 3500	Wrap-around Doors	2001	2004	52"	920-35-S105
CHEVROLET	Camaro	Standard Roof	1984	1992	48.5"	920-35
CHEVROLET	Camaro	Wrap-around Doors	1993	2002	45.5"	920-35C
CHEVROLET	Caprice	Standard Roof	1988	1996	48.5"	920-35C
CHEVROLET	Caprice	Wrap-around Doors	1988	1996	48.5"	920-35C
CHEVROLET	Caprice	Standard Roof	1977	1990	54.0"	920-35
CHEVROLET	Cavalier Z-24	Standard Roof	1990	1994	45"	920-35
CHEVROLET	Impala	Wrap-around Doors	2000	2005	51"	920-35I
CHEVROLET	Impala	Wrap-around Doors	2006	2007		920-35I6
CHEVROLET	Lumina (Sedan)	Wrap-around Doors	1997	-	47"	920-35GM
CHEVROLET	Lumina (Sedan)	Wrap-around Doors	1998	-	47"	920-35C
CHEVROLET	R/V Chassis-Cab	Standard Roof	1990	1991	49"	920-35
CHEVROLET	R/V Series Pickup	Standard Roof	1990	1991	59"	920-35
CHEVROLET	S-10 Blazer & Pickup	Wrap-around Doors	1991	1993	47"	920-35GM2
CHEVROLET	Silverado/Sierra	Wrap-around Doors	2001	2007	52"	920-35-S105
CHEVROLET	Suburban	Standard Roof	1990	1991	59"	920-35

LIGHT BAR MOUNTING

Make	Model	Style	Beg. Year	Thru Year	Roof Width	SVP Model #
CHEVROLET	Suburban	Wrap-around Doors	2000	2005	52"	920-35-S105
CHEVROLET	Tahoe	Wrap-around Doors	2000	2005	52"	920-35-S105
CHEVROLET	Tahoe	Wrap-around Doors	2007	2007	52"	920-35GM5
CHEVROLET	Trailblazer/Envoy	Wrap-around Doors	2002	2005	48"	920-35CTB
CHEVROLET	Trailblazer	Wrap-around Doors	2007	2007	48"	920-35S105
CHEVROLET	Trucks	-	1980	1987	-	920-35C5
CHEVROLET	Trucks	-	1988	1994	-	920-35
CHEVROLET	Van (not Astro)	Standard Roof	1988	1995	65"	920-35
CHEVROLET	Van (not Astro)	Wrap-around Doors	1996	2002	65"	920-35INT
DODGE	Caravan/Grand Caravan	Standard Roof	1990	1995	59"	920-35C
DODGE	Charger	Wrap-around Doors	2005	2007	51"	920-35M1
DODGE	Dakota	Wrap-around Doors	1990	1996	48"	920-35GM2
DODGE	Dakota (Reg,Ext,Crew)	Wrap-around Doors	1997	2007	48"	920-35GM
DODGE	Dakota	Wrap-around Doors	2006	2006	48"	920-35F
DODGE	Durango	Wrap-around Doors	1996	2003	48"	920-35GM
DODGE	Durango	Wrap-around Doors	2004	2005	48"	920-35-S105
DODGE	Intrepid	Wrap-around Doors	1998	2004	46"	920-35GM
DODGE	Intrepid	Standard Roof	1993	1997	48"	920-35INT
DODGE	Magnum	Wrap-around Doors	2005	2005	51"	920-35M1
DODGE	Ram (Quad cab)	Wrap-around Doors	1999	2001	54.5"	920-35GM
DODGE	Ram	-	1991	-	-	920-35
DODGE	Ram	-	1995	-	-	920-35C
DODGE	Ram (Quad cab)	Wrap-around Doors	1999	2001	54.5"	920-35GM
DODGE	Ram (Quad cab)	Wrap-around Doors	2002	2005	54.5"	920-35RM2
DODGE	Ram pickup	Wrap-around Doors	1994	1998	54.5"	920-35CTB
DODGE	Ram pickup	-	1994	1998	-	920-35F
DODGE	Ram pickup (Crew)	Wrap-around Doors	2003	2007	48"	920-35RM5
DODGE	Ram pickup (Reg)	Wrap-around Doors	2003	2007	48"	920-35RM2
FORD	Bronco	-	1995	-	-	920-35F
FORD	Crown Victoria	Wrap-around Doors	1992	2007	46"	920-35CVLP
FORD	Crown Victoria	Wrap-around Doors	1988	1994	-	920-35C5
FORD	E-Series (Van)	Standard Roof	1987	2007	66"	920-35
FORD	Excursion	-	2000	2005	57"	920-35GM
FORD	Expedition	Wrap-around Doors	1997	2002	49"	920-35EX
FORD	Expedition	Wrap-around Doors	2003	2007	49"	920-35FT
FORD	Explorer	Wrap-around Doors	2000	2005	49"	920-35D
FORD	FreeStar	Wrap-around Doors	2005	2007	49.5"	920-35D
FORD	F-Series	Standard Roof	1987	1996	60.5"	920-35
FORD	F-Series	Wrap-around Doors	1997	-	60.5"	920-35D
FORD	F-Series (150, 250)	Wrap-around Doors	1998	2001	53"	920-35D
FORD	F-Series (150/250,450,550)	Wrap-around Doors	2004	2005	57"	920-35F4

LIGHT BAR MOUNTING

Make	Model	Style	Beg. Year	Thru Year	Roof Width	SVP Model #
FORD	F-Series (250)	-	1991	-	-	920-35D
FORD	F-Series (250)	-	1991	-	-	920-35C
FORD	F-Series (250)	Wrap-around Doors	2002	2004	51.5"	920-35FT
FORD	F-Series (250, 350, 450, 550)	Wrap-around Doors	1998	2005	57"	920-35GM
FORD	F-Series (350)	-	2000	-	-	920-35
FORD	LTD-Crown Vic	Standard Roof	1988	1991	51"	920-35
FORD	LTD-Crown Vic	-	1992	2005	51"	920-35CVLP
FORD	Mustang	Standard Roof	1988	1993	47"	920-35
FORD	Ranger	Standard Roof	1987	1992	52"	920-35
FORD	Ranger	-	1997	-	-	920-35
FORD	Ranger	-	1999	2000	-	920-35GM
FORD	Ranger	Wrap-around Doors	2002	2007	48.5"	920-35GM
FORD	Taurus	Wrap-around Doors	2001	2005	47"	920-35GM2
FORD	Van (Full size)	-	1987	2007	66"	920-35
FORD	Windstar	Wrap-around Doors	1999	2001	49"	920-35GM
GMC	Envoy	Wrap-around Doors	2002	2004	48"	920-35CTB
GMC	Jimmy (full size)	Standard Roof	1990	1991	59"	920-35
GMC	S10 Jimmy & pickup	Wrap-around Doors	1990	1993	47"	920-35GM2
GMC	Trucks	-	1988	1994	-	920-35GM
GMC	Trucks	-	1995	2000	-	920-35-S105
ISUZU	Delivery Truck Chassis	-	2000	2004	-	920-35IZ
JEEP	Jeep Cherokee	Standard Roof	1990	1994	53.5"	920-35
JEEP	Jeep Cherokee	Standard Roof	1995	2001	51.5"	920-35
JEEP	Jeep Grand Cherokee	Wrap-around Doors	1999	2004	48"	920-35GM
JEEP	Jeep Liberty	Wrap-around Doors	2002	2004	46"	920-35GM
PLYMOUTH	PT Cruiser	Wrap-around Doors	2001	2005	44"	920-35GM
PONTIAC	Grand Prix	-	1994	-	-	920-35GM
TOYOTA	Tundra	-	2004	2004	-	920-35F



Proudly
Canadian

PUBLIC ADDRESS SYSTEM & SPEAKERS

LCS600 - PA/AIR HORN/AUX SECURITY MIC 100 WATT



SPECIFICATIONS

Size: Handset: 3 3/4" H x 2 1/2" W x 1 1/2" D
 Amplifier Box: 1 3/4" H x 6" W x 5 3/4" D

Weight: 5 lbs.

Output: 100 Watts

Voltage: 10V - 16V DC (24V available)

Frequency: 675-1633Hz

Amp Draw: 8 Amps

LCS600

The LCS600 microphone control head features Public Address function, Air Horn, and either Radio Repeat function or 20 Amp Light Control relay. Also included are LED indicators for Power and Auxiliary function (Light Control or Radio Repeat function). On/Off/Volume is controlled with a rotary thumbwheel. The remote mount amplifier powers one 100 Watt speaker and includes the Light Control relay wiring and a remote Air Horn input with positive and negative switching options. The LCS600 features jumpers for option selections and is protected against speaker shorts with a self-resetting circuit and a high & low voltage shutdown feature. Ships complete with wire harness w/positive locking connector, mic clip, hardware, and instructions.

All Speakers have an Output of 100 Watts and an Impedance of 11 Ohms



D-10

Designed for exterior mounting. Grey fiberglass bell housing gives wide angle sound dispersion while providing high weather resistance.

Size: 12" L / 14" W / 6" H



D-40

Ultra thin, fits in tight places. Solid cast aluminum, works with a wide variety of sirens. Class A, Article 8 Title 13 compatible.

Size: 6 1/2" Dia. / 2 1/4" Depth



D-60




Bell housing made of high-impact ABS plastic. Speaker can be mounted almost anywhere.

Size: 7 1/4" L / 8" W / 5 1/4" H



TRAFFIC ARROWS AMBER LEDS


- 12Vdc
- 24" - 96" (6" length increments)
- Twist-lock disconnect power cable sold separately (see chart below)
- Includes cab mount controller
- Encapsulated LED panels (High Density)
- Power cable exits drivers side
- Aluminum construction
- 4 standard patterns:
left, right, center out, wig-wag
(with dimming feature)
- 24Vdc available - call factory

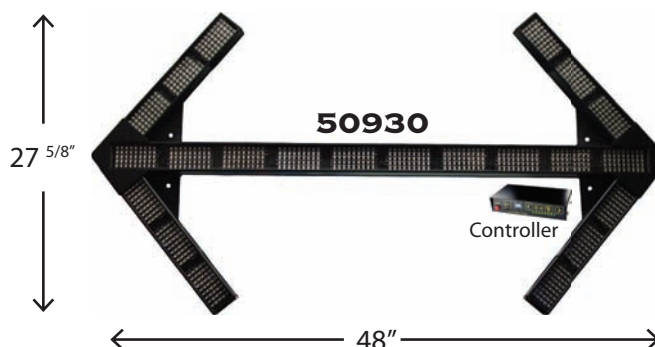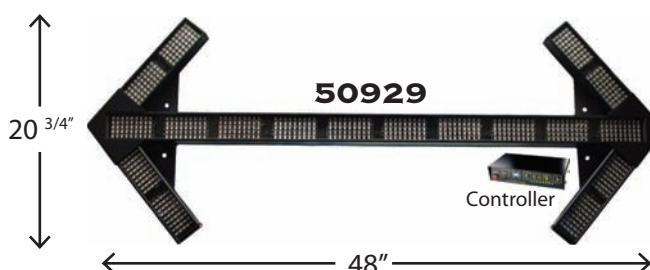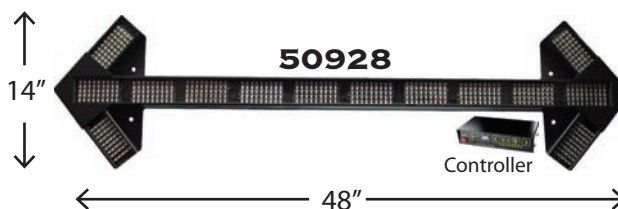

High Density LED Panels



T-Slot Mounting fit for 1/4" 20 bolt



50000 Series

Model #	Length (±1/8")	Height (±1/8")	# of Panels in Shaft	# of Panels in Each Arm	Total # of Panels
50904	24"	14"	4	1	8
50905	24"	20 3/4"	4	2	12
50906	24"	27 5/8"	4	3	16
50910	30"	14"	6	1	10
50911	30"	20 3/4"	6	2	14
50912	30"	27 5/8"	6	3	18
50916	36"	14"	8	1	12
50917	36"	20 3/4"	8	2	16
50918	36"	27 5/8"	8	3	20



Cable #	Length
77200	20'
77201	30'
77202	40'
77203	50'
77204	60'

Arrow Specification Chart on next page →



50000 Series cont.

Model #	Length (±1/8")	Total Height	# of Panels in Shaft	# of Panels in Each Arm	Total # Panels
50922	42"	14"	8	1	12
50923	42"	20 3/4"	8	2	16
50924	42"	27 5/8"	8	3	20
50928	48"	14"	10	1	14
50929	48"	20 3/4"	10	2	18
50930	48"	27 5/8"	10	3	22
50934	54"	14"	10	1	14
50935	54"	20 3/4"	10	2	18
50936	54"	27 5/8"	10	3	22
50940	60"	14"	12	1	16
50941	60"	20 3/4"	12	2	20
 50942	60"	27 5/8"	12	3	24
50943	60"	27 5/8"	12	3	24
50946	66"	14"	12	1	16
50947	66"	20 3/4"	12	2	20
50948	66"	27 5/8"	12	3	24
50952	72"	14"	16	1	20
50953	72"	20 3/4"	16	2	24
50954	72"	27 5/8"	16	3	28
50955	72"	36"	16	4	32
50958	78"	14"	16	1	20
50959	78"	20 3/4"	16	2	24
50960	78"	27 5/8"	16	3	28
50964	84"	14"	18	1	22
50965	84"	20 3/4"	18	2	26
50966	84"	27 5/8"	18	3	30
50970	90"	14"	18	1	22
50971	90"	20 3/4"	18	2	26
50972	90"	27 5/8"	18	3	30
50976	96"	14"	18	1	22
50977	96"	20 3/4"	18	2	26
50978	96"	27 5/8"	18	3	30

Legend:  = Meets Quebec Standard



Proudly
Canadian




Mounting
Solutions
Available
p. 82


SPLIT TRAFFIC ARROWS

SPLIT TRAFFIC ARROWS AMBER LEDS

- 12Vdc
- 24" - 96" (6" length increments)
- 12" Power cable exits driver's side
- Twist-lock disconnect power cable sold separately (see chart below)
- 10' of cable between sections (extensions sold separately)
- Encapsulated LED panels
- Aluminum construction
- Includes cab mount controller
- 4 standard patterns: left, right, center out, wig-wag (with dimming feature)
- 24Vdc available - call factory

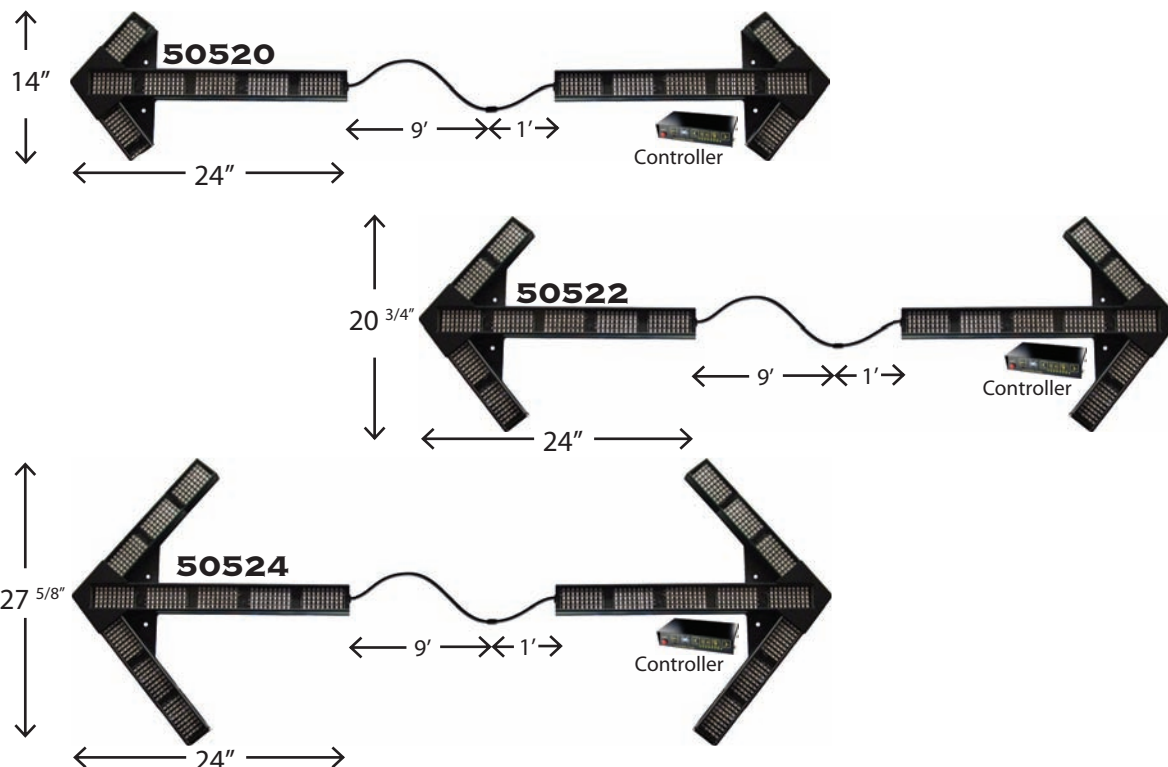

T-Slot Mounting fit for 1/4" 20 bolt



Extreme Fleet High Density LED Panel



Cable Extensions (between Sections)

Cable #	Length
77206	10'
77210	15'
77207	20'
77208	30'
77209	40'



Main Power Cable

Cable #	Length
77200	20'
77201	30'
77202	40'
77203	50'
77204	60'

Arrow Specification Chart on next page →



Proudly
Canadian

50500 Series

Model #	Length (±1/8)	Height (inches)	# of Panels in Shaft	# of Panels in each arm	Total # Panels
50504	15"	14"	3	1	10
50506	15"	20 ^{3/4} "	3	2	14
50508	15"	27 ^{5/8} "	3	3	18
50512	20"	14"	4	1	12
50514	20"	20 ^{3/4} "	4	2	16
50516	20"	27 ^{5/8} "	4	3	20
50520	24"	14"	5	1	14
50522	24"	20 ^{3/4} "	5	2	18
50524	24"	27 ^{5/8} "	5	3	22
50528	30"	14"	6	1	16
50530	30"	20 ^{3/4} "	6	2	20
50532	30"	27 ^{5/8} "	6	3	24
50536	36"	14"	7	1	18
50538	36"	20 ^{3/4} "	7	2	22
50540	36"	27 ^{5/8} "	7	3	26
50544	42"	14"	8	1	20
50546	42"	20 ^{3/4} "	8	2	24
50548	42"	27 ^{5/8} "	8	3	28
50552	48"	14"	10	1	24
50554	48"	20 ^{3/4} "	10	2	28
50556	48"	27 ^{5/8} "	10	3	32

SPLIT TRAFFIC ARROWS

Proudly
Canadian



Mounting
Solutions
Available
p. 82

TRAFFIC ARROWS

TRAFFIC ARROWS HIGH BRIGHTNESS AMBER LEDS





- 12Vdc (24Vdc available - call factory)
- Twist-lock disconnect power cable sold separately (see chart below)
- 12" power cable exits driver's side (standard)
- Includes cab mount controller
- Encapsulated LEDs
- Aluminum construction
- 4 standard patterns:
left, right, center out, wig-wag
(with dimming feature)



Optional Bracket kit 98061 shown
mounts 48" Traffic Arrow to
a standard truck rack



Kit 98016

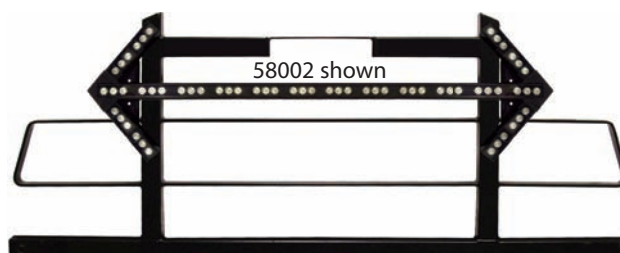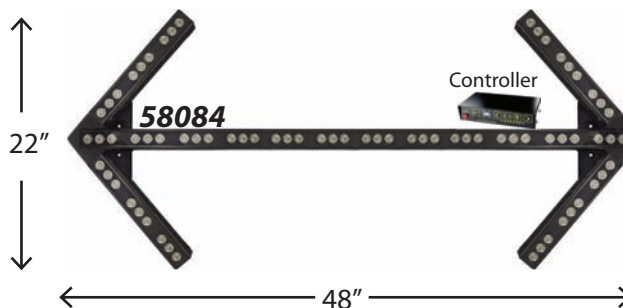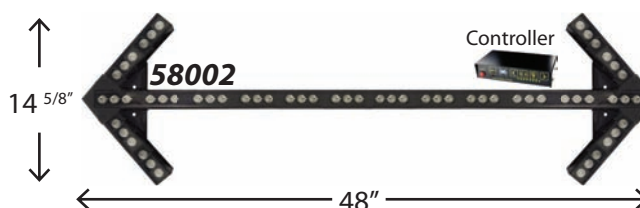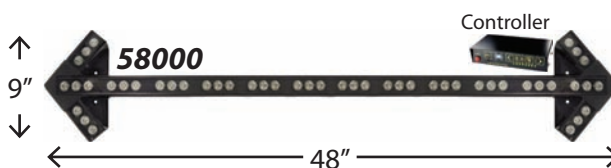

58000 Series

Model #	Length (±1/8)	Height (inches)	# of Panels in Shaft	# of Panels in Arm	Total # Panels	Total # of LEDs		
58006	24"	9"	6	1	10	30	Cable #	Length
58007	24"	14 5/8"	6	2	14	42	77200	20'
58080	24"	22"	6	3	18	54	77201	30'
58008	30"	9"	8	1	12	36	77202	40'
58009	30"	14 5/8"	8	2	16	48	77203	50'
58081	30"	22"	8	3	20	60	77204	60"

Arrow Specification Chart on next page →



Proudly
Canadian

58000 Series

Model #	Length (±1/8)	Height (inches)	# of panels in each shaft	# of panels in each arm	Total # Panels	Total # LEDs
58014	36"	9"	8	1	12	36
58015	36"	14 ^{5/8} "	8	2	16	48
58082	36"	22"	8	3	20	60
58016	42"	9"	10	1	14	42
58017	42"	14 ^{5/8} "	10	2	18	54
58083	42"	22"	10	3	22	66
58000	48"	9"	12	1	16	48
58002	48"	14 ^{5/8} "	12	2	20	60
58084	48"	22"	12	3	24	72
58018	54"	9"	12	1	16	48
58019	54"	14 ^{5/8} "	12	2	20	60
58085	54"	22"	12	3	24	72
58001	60"	9"	12	1	16	48
58003	60"	14 ^{5/8} "	12	2	20	60
58086	60"	22"	12	3	24	72
58022	66"	9"	12	1	16	48
58023	66"	14 ^{5/8} "	12	2	20	60
58087	66"	22"	12	3	24	72
58024	72"	9"	14	1	18	54
58025	72"	14 ^{5/8} "	14	2	22	66
58088	72"	22"	14	3	26	78
58026	78"	9"	14	1	18	54
58027	78"	14 ^{5/8} "	14	2	22	66
58089	78"	22"	14	3	26	78
58028	84"	9"	16	1	20	60
58029	84"	14 ^{5/8} "	16	2	24	72
58090	84"	22"	16	3	28	56
58030	90"	9"	16	1	20	60
58031	90"	14 ^{5/8} "	16	2	24	72
58091	90"	22"	16	3	28	56
58032	96"	9"	16	1	20	60
58033	96"	14 ^{5/8} "	16	2	24	72
58092	96"	22"	16	3	28	56



Mounting
Solutions
Available
p. 82





SPLIT TRAFFIC ARROWS

SPLIT TRAFFIC ARROWS HIGH BRIGHTNESS AMBER LEDS

- 12Vdc
- 12" power cable exits driver's side
- Twist-lock disconnect power cable sold separately (see chart below)
- 10' of cable between sections (extensions sold separately)
- Encapsulated LEDs (3 x High brightness LEDs per panel)
- Aluminum construction
- Includes controller
- 4 standard patterns:
left, right, center out, wig-wag
(with dimming feature)



T-Slot Mounting fit for 1/4" 20 bolt

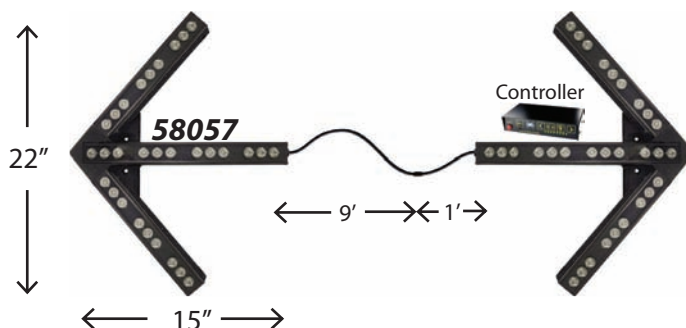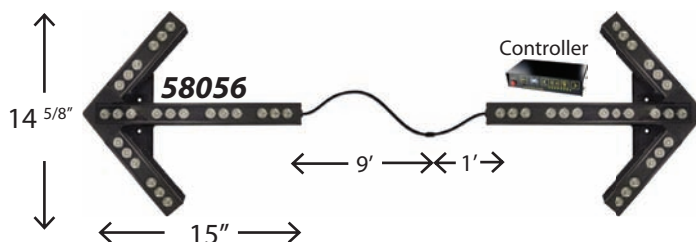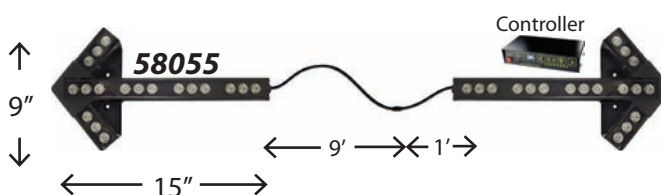

Cable Extensions (between Sections)

Cable #	Length
77206	10'
77210	15'
77207	20'
77208	30'
77209	40'



Main Power Cable

Cable #	Length
77200	20'
77201	30'
77202	40'
77203	50'
77204	60'

Arrow Specification Chart on next page →



Proudly
Canadian



58000 Series

Model #	Length (±1/8)	Height (inches)	# of panels in each shaft	# of panels in each arm	Total # Panels	Total # LEDs
58050	12"	9"	3	1	10	30
58051	12"	14 5/8"	3	2	14	42
58055	15"	9"	4	1	12	36
58056	15"	14 5/8"	4	2	16	48
58057	15"	22"	4	3	20	60
58058	20"	9"	5	1	14	42
58059	20"	14 5/8"	5	2	18	54
58061	20"	22"	5	3	22	66
58011	24"	9"	5	1	14	48
58063	24"	9"	6	1	16	48
58034	24"	14 5/8"	6	2	20	60
58035	24"	22"	6	3	24	72
58036	30"	9"	8	1	20	60
58037	30"	14 5/8"	8	2	24	72
58038	30"	22"	8	3	28	84
58039	36"	9"	10	1	24	72
58040	36"	14 5/8"	10	2	28	84
58041	36"	22"	10	3	32	96
58042	42"	9"	12	1	28	84
58043	42"	14 5/8"	12	2	32	96
58044	42"	22"	12	3	36	108
58045	48"	9"	14	1	32	96
58046	48"	14 5/8"	14	2	36	108
58047	48"	22"	14	3	40	120

TRAFFIC DIRECTORS AMBER LEDS

- 12Vdc
- Encapsulated LED panels
- Aluminum housing with top/bottom/back T-slot mounting
- 4 standard patterns: left, right, center out, wig-wag (with dimming feature)
- Dimensions: 1 5/8" H x 1 7/8" D
- Twist-lock disconnect cable sold separately (see chart below)

T-Slot Mounting fit for 1/4" 20 bolt



57000 Series



Model #	Length (±1/8)	Height (inches)	# of Panels in Shaft	Cable #	Length
57070	36"	1 5/8"	8	77200	20'
57060	48"	1 5/8"	10	77201	30'
				77202	40'
				77203	50'
				77204	60'





TRAFFIC DIRECTORS AMBER LEDS

- 12Vdc (24Vdc available - call factory)
- Encapsulated LED panels - high density or low density
- Aluminum housing with top/bottom/back T-slot mounting
- 4 standard patterns: left, right, center out, wig-wag (with dimming feature)
- Dimensions: 2 5/8" H x 1 7/8" D
- Twist-lock disconnect cable sold separately (see chart below)

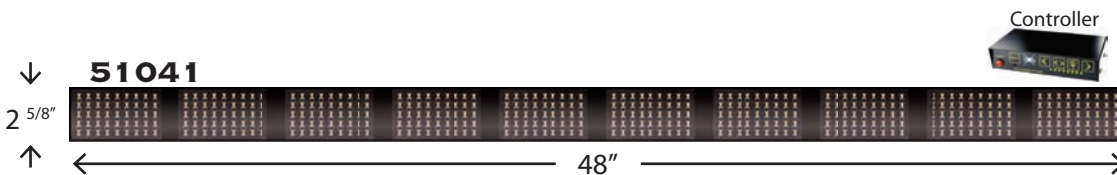

Extreme Fleet (High Density Panel)



T-Slot Mounting fit for 1/4" 20 bolt



Fleet (Low Density Panel)



High Density LED Panels

Model #	Length	Total # of Panels
51000	24"	4
51003	30"	6
51031	36"	8
51008	42"	8
51041	48"	10
51013	54"	10
51016	60"	12
51019	66"	12
51022	72"	16
51025	78"	16
51028	84"	18
51032	90"	18
51035	96"	18




Cable #	Length
77200	20'
77201	30'
77202	40'
77203	50'
77204	60'

Low Density LED Panel

Model #	Length	Total # of Panels
51038	24"	4
51046	30"	6
51051	36"	8
51056	42"	8
51061	48"	10
51065	54"	10
51074	60"	12
51077	66"	12
51082	72"	16
51085	78"	16
51088	84"	18
51091	90"	18
51094	96"	18



51003 shown with optional
Mounting Solution # 98000





Mounting
Solutions
Available
p.82

TRAFFIC DIRECTORS

TRAFFIC DIRECTORS HIGH BRIGHTNESS AMBER LEDS



- 12Vdc
- Encapsulated LED panels (3x High brightness LEDs/panel)
- Aluminum housing supplied with T-slot bracket mounts
- 4 standard patterns: left, right, center out, wig-wag (with dimming feature)
- Dimensions: 1 5/8" H x 1 7/8" D
- Twist-lock disconnect cable sold separately (see chart below)



T-Slot Mounting fit for 1/4" 20 bolt



Controller

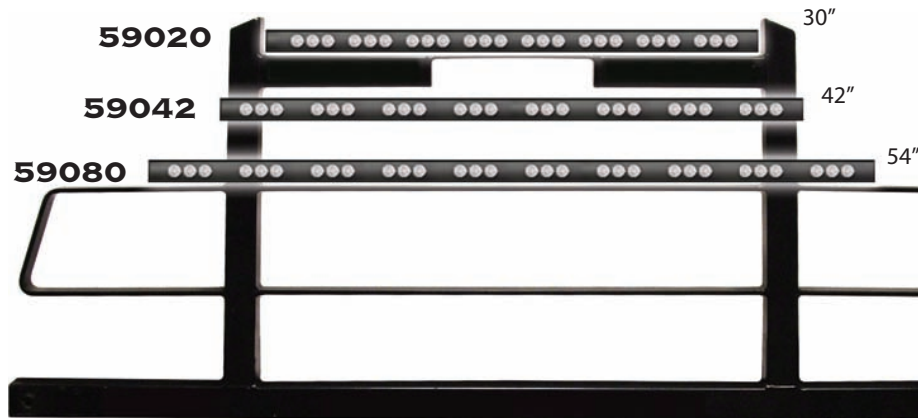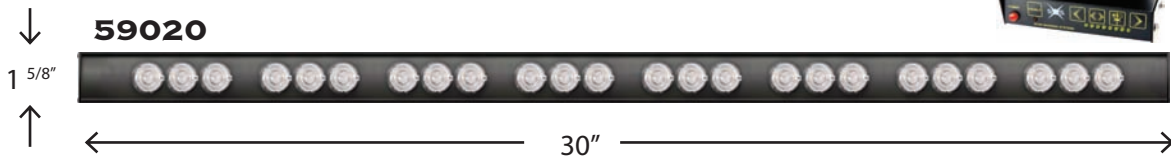


59000 Series

Model #	Length	# of Panels	Total # LEDs
59010	24"	4	12
59020	30"	8	24
59000	36"	8	24
59042	42"	8	24
59050	48"	10	30
59080	54"	10	30
59100	60"	12	36
59120	66"	12	36
59140	72"	14	42
59160	78"	14	42
59180	84"	16	48
59200	90"	16	48
59220	96"	16	48



Cable # Length

77200	20'
77201	30'
77202	40'
77203	50'
77204	60"



59020 shown with Mounting Solution # 98003



Proudly
Canadian



Mounting
Solutions
Available
p. 82


WARNING STICKS

WARNING STICKS HIGH BRIGHTNESS AMBER LEDs



- 12Vdc
- Encapsulated LED panels (3 x High brightness LEDs/panel)
- Aluminum housing with top/bottom/back T-slot mounting
- Switch panel included (on/off & pattern select)
- Supplied with 25 pattern controller
- Dimensions: 1 5/8" H x 1 7/8" D
- Twist-lock disconnect cable sold separately (see chart below)



T-Slot Mounting fit for 1/4" 20 bolt



GT Controller

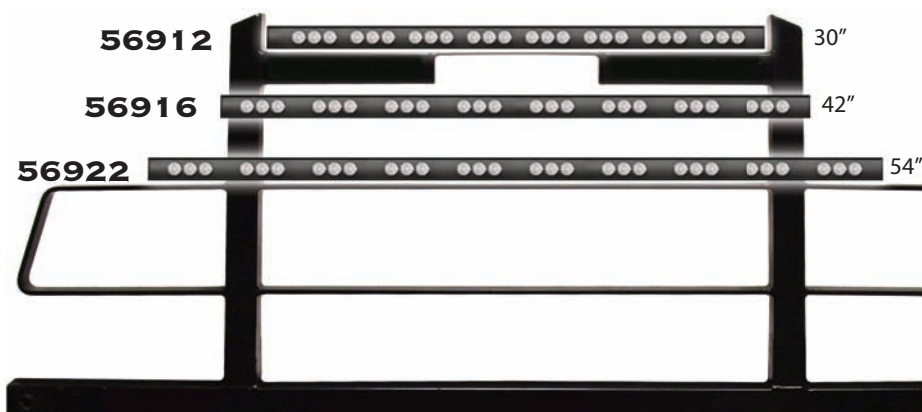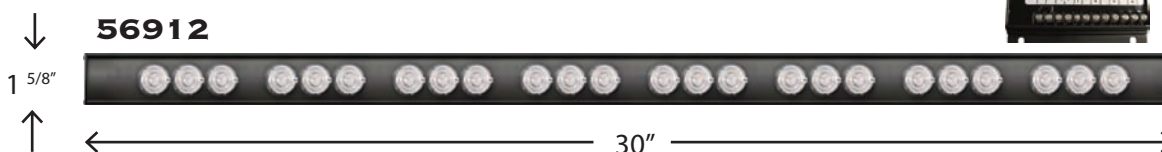


56000 Series

Model #	Length	# of Panels	Total # LEDs
56910	24"	6	18
56912	30"	8	24
56914	36"	8	24
56916	42"	8	24
56918	48"	8	24
56920	48"	10	30
56922	54"	10	30
56924	60"	12	36
56926	66"	12	36
56928	72"	14	42
56930	78"	14	42
56932	84"	16	48
56934	90"	16	48
56936	96"	16	48



Cable # Length

77200	20'
77201	30'
77202	40'
77203	50'
77204	60"



56912 shown with Mounting Solution # 98003



Proudly
Canadian




Mounting
Solutions
Available
p.82

WARNING STICKS

WARNING STICKS AMBER LEDs


- 12Vdc
- Encapsulated LED panels - high density or low density
- Aluminum housing supplied with T-slot bracket mounts
- Internal controller - 25 patterns
- Dimensions: 2 5/8" H x 1 7/8" D
- 20' cable (other lengths available) and switch supplied

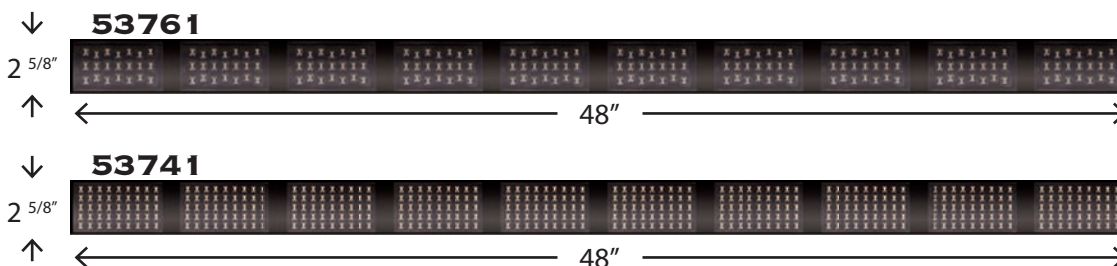

Extreme Fleet (High Density Panel)



T-Slot Mounting fit for 1/4" 20 bolt



Fleet (Low Density Panel)



53000 Series - Extreme Fleet High Density LED Panels


Model #	Length	Total # of Panels
53801	24"	4
53805	30"	6
53731	36"	8
53815	42"	8
53741	48"	10
53825	54"	10
53830	60"	12
53835	66"	12
53840	72"	16
53845	78"	16
53850	84"	18
53855	90"	18
53860	96"	18

53000 Series - Fleet Low Density LED Panel

Model #	Length	Total # of Panels
53802	24"	4
53806	30"	6
53751	36"	8
53816	42"	8
53761	48"	10
53826	54"	10
53831	60"	12
53836	66"	12
53841	72"	16
53846	78"	16
53851	84"	18
53856	90"	18
53861	96"	18



53805 shown with
Mounting Solution # 98000



Proudly
Canadian



Mounting
Solutions
Available
p. 82

SLE WARNING STICKS

SLE WARNING HEADS

- 12Vdc
- Aluminum housing with back T- slot mounting
- High density LED panels
- Available in single, dual, and triple LED panel
- Multiple user selectable flash patterns when used with compatible GT Controller
- Dimensions: 3" H x 3/4" D, various lengths
- Optional mounting bracket




Only 3/4" deep!



GT Controller




(Sold separately)

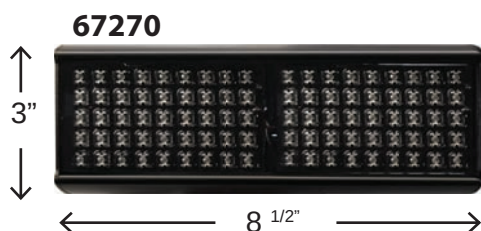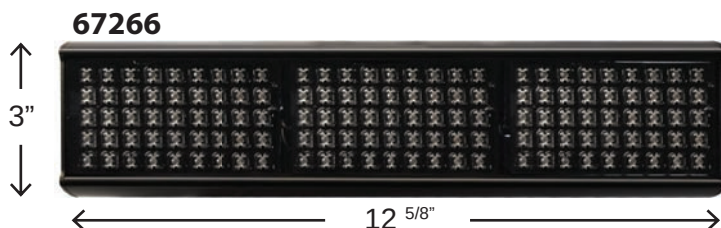

Warning Heads

Model #	LED Colour	Length
67269	Amber	4 1/2"
67273	Blue	4 1/2"
67275	White	4 1/2"
67270	Amber/Amber	8 1/2"
67274	Blue/Blue	8 1/2"
67276	White/White	8 1/2"
67280	Amber/Blue	8 1/2"
67281	Amber/White	8 1/2"
67286	Blue/White	8 1/2"
67265	Blue/Blue/Blue	12 5/8"
67266	Amber/Amber/Amber	12 5/8"

- Mounting bracket #98020 mounts SLE to virtually any surface

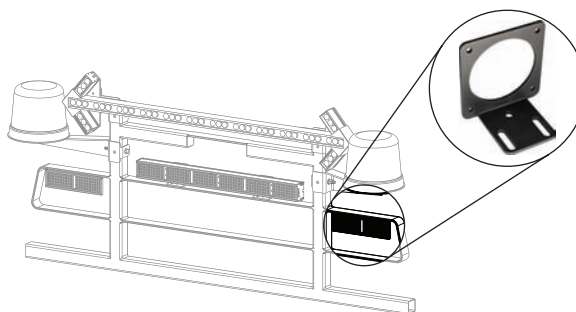

Proudly
Canadian

REMOTE POWER PACK STROBE SYSTEMS

Kit # 80044



Our power pack strobe systems come in a wide range of power from 22 watts to 90 watts and can control from 2 to 6 remote strobe heads or flash tubes depending on the model you choose. Several models offer selectable flash patterns and visual diagnostics, as well as day/night mode select.



Remote Strobe Kits

Model #	Power Pak	Heads (Qty - #)	Cables (Qty - #)	Switch
80030	68000	2 x 80000 (clear)	2 x 3830	766161
80031	68000	2 x 80001 (amber)	2 x 3830	766161
80034	RP242W	2 x 80000 (clear)	2 x 3830	766150
80035	RP242W	2 x 80001 (amber)	2 x 3830	766150
80038	68010	4 x 80000 (clear)	4 x 3830	766161
80039	68010	4 x 80001 (amber)	4 x 3830	766161
80044	RP996	4 x 80000 (clear)	4 x 3830	766150
80045	RP996	4 x 80001 (amber)	4 x 3830	766150

3904- (A,B,C,R)

Snaps into 4 1/2" diameter round hole in vehicle body,
lens colours: A, B, C, R

80000 Clear Pop-in Strobe

Measures 1" Diameter

80001 Amber Pop-in Strobe

Measures 1" Diameter

3930- (A,B,C,R)

Shock resistant black rubber housing. Universal mount bracket rear/grill mt. 4 7/8" diameter
Filter Colours (part #596): A, B, C, R

3930E- (A,B,C,R)

Same as 3930 but with extended lens for added visibility

Filter Colours (part #596): A, B, C, R

3901

Mounts in 1" hole
Enhances existing headlights/tail-lights to strobe,
glass colour: A, B, C, R

3920

Lens size: 2" X 6 3/8" installs into oval shaped hole in vehicle body (template included), replacement bulb 3901-C, Lens Colours: A, B, C, R

4500

Black housing, universal mount bracket, grill mount
Size 2 1/2" L X 5" W X 2 3/4" H

4501

Black housing, universal mount bracket, grill mt.
Size: 2 1/2" L X 6 1/2" W X 3 1/2" H
Lens Colours: A, B, C, R

68000

40 watts, 3.75 amps, 10-30 Vdc
2 outlets

68010

60 watts, 4.5 amps, 10-30 Vdc
4 outlets

RP242W

1 3/8" x 8 1/4" x 3 3/8"

2 lbs. 40 watts, 12 - 48Vdc, 4.4 amps

4 outlets

RP996

90 Watts, 12-24Vdc, 9.4 amps
6 outlets

Colours: A=Amber, R=Red, B=Blue,
C=Clear, G=Green, M=Magenta

****ALL remote strobe heads require a power pak, switch and cable to operate**



✕ 3904



✕ 80000



✕ 80001



✕ 3930



✕ 3930E



✕ 3901



✕ 3920



✕ 4500



✕ 4501



✕ 68000



✕ 68010



✕ RP242W



✕ RP996



Cable sold separately. Order one 3830 for every remote strobe head. Standard 20' length, custom lengths available, call factory for details.



Proudly Canadian

LED PRODUCTS

This interior mount STAR Mini-Phantom® LED light is perfect for undercover or unmarked vehicle applications. Like the ULB42, the ULB9 has an extremely thin profile, less than 1" high, that easily mounts to your dash, deck, mirror, or windows with suction cups. At only 9" long, the 57 long-life, alternate flashing LEDs give the STAR Mini-Phantom® the power and flexibility you need with 3 customer selectable flash patterns with the push of a button. The ULB9 is also available with a 15' hardwire lead version that will synchronize with other ULB9s (Model# ULB9-1). The ULB9 ships complete with cigarette plug with lighted On/Off switch, mounting brackets, suction cups, hardware, and instructions.



SPECIFICATIONS

Size: 15/16" H x 9" W x 1 3/8" D
Weight: Less than 1 lb.
Voltage: 12Vdc
Amp Draw*: 1.2 Amps Max
Colour Combinations: Amber, Blue, Green, Red,

Parts - ULB42 Series

Part Number
 Mirror Mount Clamp Kit 274-ULB9MMC
 Suction Cup (One) DL15-CUP
 Dash/Deck Mounting Kit ULB9-BKT
 Complete Universal Mount Kit ULB9-MK

**Amp draw will vary depending on the colour of the LED heads used and the flash pattern selected.*

DLX3




The STARBURST™ DLX3 series LED auxiliary light is a small and powerful weather resistant package perfect for mounting on motorcycle saddlebags, in trunks, on vehicle fenders, mirrors, or any place a small, intense LED light is needed. Using STAR generation-3 LEDs, it has current limit protection over the entire operating voltage and reverse polarity protection that gives you worry free operation. The STARBURST™ DLX3 is offered in a variety of colours and they can be synchronized with other STARBURST™ DLX3s. High/Low power select and 11 different customer selectable flash patterns are available, including a Steady On, for many customized possibilities. Ships complete with five 3' attached wires, gasket and instructions.

SPECIFICATIONS

Size: 1 7/16" H x 4" W x 1 7/8" D
Weight: Less than 1 lb.
Voltage: 10 - 16Vdc
Amp Draw*: 0.4 amps
Colour Combinations: Amber, Blue, Red, White

OPTIONAL MOUNT BRACKETS

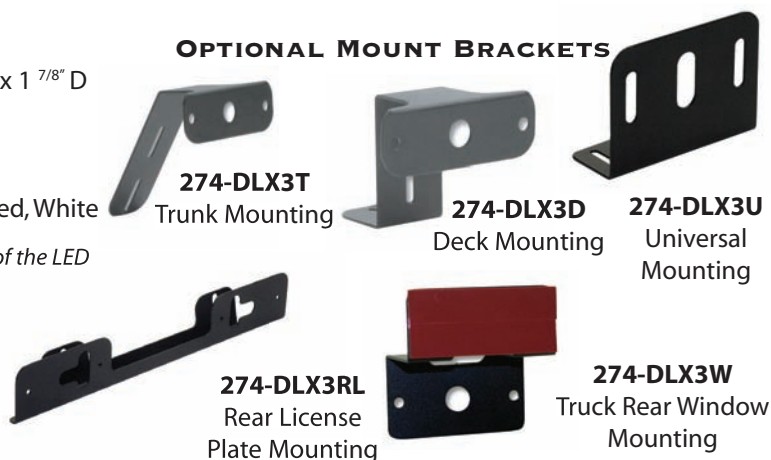

**Amp draw will vary depending on the colour of the LED heads used and the flash pattern selected.*

STARBURST™ DL15 SERIES INTERIOR/EXTERIOR

The STARBURST™ series LED lights are compact, durable, and powerful. Designed for dash, deck, window, mirror, or grille mounting, they are offered in 6" or 11" widths and are rotationally adjustable. Customer selectable flash patterns, reverse polarity protection and autovoltage adjustment (10 - 16Vdc) are standard. A rugged extruded aluminum housing protects against shock and vibration. Rated for 100,000 hours of use with an extremely low amp draw, these units are ideal for all types of emergency vehicles. Shipped complete with suction cups, 3 sets of mounting legs and instructions.



DL15-6



DL15-6W-1K



DL15-12

**Amp draw will vary depending on the colour of the LED heads used and the flash pattern selected.*

Starburst Parts	Part Number
Universal Mount Kit	DL15-BKT
Deck Mount Kit.....	DL15-SMTK
Suction Cup Kit (four).....	DL15-CUPK
Suction Cup (one)	DL15-CUP

MODELS

DL15-6	Interior mount only, 6 LED array unit, cigarette plug with lighted on/off switch, pattern select switch, 30 different customer selectable flash patterns. 0.8 amps, 1 1/2" H x 6" W x 1 1/8" D
DL15-6W:	Interior/Exterior mount, 6 LED array unit, weatherproof 12' three conductor cable, 30 different customer selectable flash patterns. 0.8 amps, 1 1/2" H x 6" W x 1 1/8" D
DL15-6W-1K:	Interior/Exterior mount synchronized kit, one pair of 6 LED array units (two DL15-6W-1 units that can be synchronized for Simultaneous or Alternating flashing), weatherproof 12' three conductor cables, 3 different customer selectable flash patterns. 0.8 amps, 1 1/2" H x 6" W x 1 1/8" D
DL15-12:	Interior mount only, 12 LED array unit, cigarette plug with lighted on/off switch, pattern select switch, 35 different customer selectable flash patterns. 1.6 amps, 1 1/2" H x 11" W x 1 1/8" D
DL15-12W:	Interior/Exterior mount, 12 LED array unit, weatherproof 12' three conductor cable, 35 different customer selectable flash patterns. 1.6 amps, 1 1/2" H x 6" W x 1 1/8" D
Mounting Options:	Suction cups, 5" permanent mount legs (over third brake light), 2 7/8" permanent mount legs or 1 3/4" permanent mount legs. [suction cups and all mounting legs are included (DL15-BKT)]
Approvals:	SAE J595, SAE J1318, and California Title 13 for Red and Blue (Does not apply to all flash patterns)



Proudly
Canadian

LED LIGHTING

STARBURST™ DL15 SERIES (INTERIOR/EXTERIOR)



DL15-6MMB

These STARBURST™ series LED lights are specifically designed kits for mirror or grille mounting. They offer the same features as the standard DL15 series LED lights. The DL15-6MMB uses the DL15-6 head and the DL15-GMB uses the DL15-6W head.

**Amp draw will vary depending on the colour of the LED heads used and the flash pattern selected.*

Starburst Parts	Part Number
Grille Mount Bracket Kit	274-DL15GMB
Mirror Mount Bracket Kit	274-DL15MMB



DL15-6GMB

MODELS

DL15-6MMB: Interior mount only kit, mirror mount bracket, 6 LED array unit, cigarette plug with lighted on/off switch, pattern select switch, 30 different customer selectable flash patterns.

DL156-GMB: Interior/Exterior mount, grille mount bracket, 6 LED array unit, weatherproof connector, 12' three conductor cable, 30 different customer selectable flash patterns *[suction cups and all mounting legs are included (DL15-BKT)]*

SPECIFICATIONS

Size: 1 1/2" H x 6" W x 1 1/8" D (less brackets)

Weight: Less than 2 lb.

Voltage: 10 - 16Vdc

Amp Draw*: 0.8 amps

Colour Combinations: Amber, Blue, Red, White

Approval: Meets SAE J595, SAE J1318, and California Title 13 for Red and Blue
(Does not apply to all flash patterns)



VL22

VISOR LED LIGHT

The STARVISOR II™ series lights give you plenty of possibilities to customize to your individual needs. The STARVISOR II™ VL22 series offers 30 different customer selectable flash patterns along with Auto-Tilt™ Automatic Activation: it automatically switches on when visor is pulled down and automatically switches off when visor is lifted up. High impact resistant housing, vibration resistant LED technology, and micro-controlled solid state flasher allows for long life. Power indication LED allows you to see ready status. Auto-voltage adjust compensates for varying vehicle voltage (10 - 16Vdct). Designed to be visor mount only. Ships complete with cigarette plug, hook and loop fasteners, and instructions.

SPECIFICATIONS

Size: 4"H x 11 1/2"W x 7/8"D

Weight: Less than 1 lb.

Voltage: 10 - 16Vdc

Amp Draw*: 1.5 Amps

Colours Available:

Red/Blue, Blue/Blue, Red/Red, Amber/Red

Amber/Blue, Amber/Amber, Red/White,

Amber/White, White/White

**Amp draw will vary depending on the colour of the LED heads used and the flash pattern selected.*

M-TECH LED DASH & DECK LIGHTS

DL35-6 & DL35-6-1 (DL35-6 SHOWN BELOW)



DL35-12



DL35-12-1



SPECS & FEATURES

- Extremely wide light distribution
- Highly efficient optics
- Impact resistant housing
- Flashback hood
- Reverse polarity protection
- Voltage: 12Vdct
- Light weight: less than 2 lbs.
- Colour Combinations:
Amber, Blue, Green, Red, White
- Ships complete with mounting hardware and instructions

DL35-6-1

12' Cable
Synchronizing Capabilities
4 Flash Phases
22 Customer Selectable Flash Patterns
Flash Pattern Select Button
Dual Colour Availability
Amp Draw: 0.4 Amps
Dimensions: 2" H X 6" W X 5" D

DL35-6

Cigarette Plug Adapter w/Lighted On/Off Switch
35 Customer Selectable Flash Patterns
Flash Pattern Select Button
Dual Colour Availability
Amp Draw: 0.4 Amps
Dimensions: 2" H X 6" W X 5" D

DL35-12

Cigarette Plug Adapter w/Lighted On/Off Switch
35 Customer Selectable Flash Patterns (two patterns keep RED side on steady to meet certain state requirements)
Flash Pattern Select Button
Single Colour for Each Head
Amp Draw: 0.8 Amps
Dimensions: 2" H X 12" W X 5" D

DL35-12-1

12' Cable
Synchronizing Capabilities
4 Flash Phases
21 Customer Selectable Flash Patterns (two patterns keep RED side on steady to meet certain state requirements)
Flash Pattern Select Button
Single Colour for Each Head
Amp Draw: 0.8 Amps
Dimensions: 2" H X 12" W X 5" D



Proudly
Canadian

Go Light

REMOTE CONTROLLED SEARCHLIGHTS

Programmable wireless remote
 Durable, versatile, powerful... guaranteed!
 Searchlights built to last
 Cr5 Pentabeam™ technology
 Remote controlled operation
 370 degree rotation X 135 degree tilt
 400,000 candle power, 5.5 amps
 U.V. & salt water resistant
 3 Year Warranty directly from Golight
 12Vdc

Golight® Cr5 Pentabeam™

Combining a revolutionary parabolic reflector with an axial filament bulb, Cr5 Pentabeam™ technology generates an extremely bright, virtually perfect beam of light to eliminate dark spots, cast a broad spectral pattern and reach distances of up to one-half mile



MODEL #	DESCRIPTION
STRYKER 12 VOLT	
3000	STRYKER WIRELESS HANDHELD REMOTE - WHITE
3051	STRYKER WIRELESS HANDHELD REMOTE - BLACK
3006	STRYKER WIRELESS HANDHELD REMOTE - CHROME
3151	STRYKER WIRELESS DASH MOUNT REMOTE - BLACK
3100	STRYKER WIRELESS DASH MOUNT REMOTE - WHITE
3106	STRYKER WIRELESS DASH MOUNT REMOTE - CHROME
3049	STRYKER COMB. WIRELESS DASH AND HANDHELD REMOTE - BLACK
3067	STRYKER COMB. WIRELESS DASH AND HANDHELD REMOTE - WHITE
3066	STRYKER COMB. WIRELESS DASH AND HANDHELD REMOTE - CHROME
GOLIGHT 12 VOLT	
5149	PORTABLE GOLIGHT W/WIRED REMOTE - GREY
5167	PORTABLE GOLIGHT W/WIRED REMOTE - WHITE
2020	PERMANENT GOLIGHT W/DASH MOUNTED REMOTE - WHITE
RADIORAY 12 VOLT	
7900	PORTABLE RADIORAY W/ WIRELESS REMOTE - WHITE
7901	PORTABLE RADIORAY W/MAGNETIC SHOE - WHITE
7951	PORTABLE RADIORAY W/ MAGNETIC SHOE - BLACK
2000	PERMANENT MOUNT RADIORAY W/WIRELESS REMOTE - WHITE
2051	PERMANENT MOUNT RADIORAY W/WIRELESS REMOTE - BLACK
2049	PERMANENT MOUNT RADIORAY COMBINATION - BLACK
2067	PERMANENT MOUNT RADIORAY COMBINATION - WHITE
2110	RADIORAY STANCHION MOUNT W/WIRELESS REMOTE - BLACK
2100	RADIORAY STANCHION MOUNT W/WIRELESS REMOTE - WHITE

Chart continues -->

VISIT WWW.GOlight.COM FOR INFORMATION

MODEL #	DESCRIPTION
RADIORAY 24 VOLT	
* 24 VOLT LIGHTS AVAILABLE IN CERTAIN MODELS - PLEASE CALL FOR DETAILS *	
PROFILER II	
8130	PROFILER II HAND HELD RECHARGEABLE
STRYKER ACCESSORIES	
30100	WIRELESS HANDHELD REMOTE
39000	9011 BULB FOR STRYKER - CLEAR
15305	STRYKER ROCKGUARD - WHITE
15306	STRYKER ROCKGUARD - BLACK
GOLIGHT/RADIORAY ACCESSORIES	
1204	110 VOLT CONVERTER - BLACK
15007	COVERT IR PERMANENT MOUNT LENS
15011	COVERT IR SNAP ON LENS
15012	IR BEZEL FOR IR SNAP ON LENS
15013	IR SNAP ON LENS & IR BEZEL KIT
15201	SHOE BASE (PERMANENT MOUNT) - GREY
15202	SHOE BASE (PERMANENT MOUNT) - WHITE
15203	SHOE BASE (PERMANENT MOUNT) - BLACK
15303	LENS - AMBER
15304	ROCKGUARD - WHITE
15311	SNAP ON ROCKGUARD FOR IR BEZEL
16300	SHOE BASE MAGNETIC - GREY
16303	SHOE BASE MAGNETIC - BLACK
17920	GOLIGHT SECURITY DOME - CLEAR
18000	HEAVY NYLON CARRYING CASE
2020-10	10' CORD FOR 2020 - BLACK
2020-10X	10' EXTENSION FOR 2020 - BLACK
2020-20	20' CORD FOR 2020 - BLACK
2020-20X	20' EXTENSION FOR 2020 - BLACK
2020-32	32' CORD FOR 2020 - BLACK
2020-D	DASH MOUNT CONTROL FOR 2020 - BLACK
2020-Y	Y SPLITTER FOR 1 REMOTE 2 LIGHTS FOR 2020 - BLACK
2020-X	X SPLITTER FOR 2 REMOTES 1 LIGHT FOR 2020 - BLACK
2067-10	10' CORD FOR 2067 - BLACK
2067-10X	10' EXTENSION FOR 2067 - BLACK
2067-20	20' CORD FOR 2067 - BLACK
2067-20X	20' EXTENSION FOR 2067 - BLACK
2067-32	32' CORD FOR 2067 - BLACK
2067-32X	32' EXTENSION FOR 2067 - BLACK
2067-D	DASH MOUNT CONTROL FOR 2067 - BLACK
2067-Y	Y SPLITTER FOR 1 REMOTE 2 LIGHTS FOR 2067 - BLACK
2067-X	X SPLITTER FOR 2 REMOTES 1 LIGHT FOR 2067 - BLACK
49000	H-9 BULB - CLEAR
49420	H9420 GE SEAL BEAM LAMP (FLOOD) - CLEAR
7900-T	PROGRAMMABLE WIRELESS REMOTE - BLACK
7921	12 VOLT REMOTE CONTROL BATTERY MN21 - BLACK
PROFILER II ACCESSORIES	
8110	STAND ALONE CHARGER
81007	IR LENS
81301	RED LENS
81303	AMBER LENS
8131	LITHIUM-POLY BATTERY PACK
49030	H-7 55 W BLUE FUSION BULB

VISIT WWW.GOlight.COM FOR INFORMATION



Proudly
Canadian

TRACTOR & PORTABLE LIGHT



5001M



5001

5000 Series

Model #	Description	Volts DC	Watts	Max Amps	Mounting	Dimensions Height x Dia.	Replacement Bulb
5001	Tractor Light- Sealed Beam	12	35	3	PM	5 3/4" x 4 7/8"	2073-4411
5001M	#5001 Magnetic Mount	12	35	3	MM	6" x 4 7/8"	2073-4411
5001H	Tractor Light- Halogen Sealed Beam	12	50	4	PM	5 3/4" x 4 7/8"	2073-H7610
5001HM	#5001H Magnetic Mount	12	50	4	MM	6" x 4 7/8"	2073-H7610
5001HS	Tractor Light-Halogen Spot	12	50	4	PM	5 3/4" x 4 7/8"	2073-H7606



Model	735S & 735FI	
Product Type	735S - strobe - battery operated strobe with on/off toggle switch 735FI - flashing incandescent - battery operated flashing incandescent light available in stedi-burn with photocell or manual switch (toggle switch available, model 735FI-T-Colour)	
Dimensions	H: 11 ³ / ₄ " W: 6 ¹ / ₂ "	
Mounting	Portable (standard) or magnetic mount (models 735SM, 735FIM)	
Base Material	high impact safety orange plastic	
Specifications		
Voltages	735FI - 12Vdc	735SB - 6Vdc (stedi-burn) 735FI - 6Vdc (flashing) 735FI - 12Vdc (flashing)
Joules	735S - 3	735FI - n/a
Flash Patterns	single flash or stedi-burn (model 735SB)	
Lens Colours	amber, red, blue, clear, green, magenta	
Replacement Parts		
Lens	300-Colour	
Strobe Tube (735S)	129-Z	
Bulb Stedi-Burn 6V (735SB)	2073-1906	
Bulb Flashing 6V (735FI)	2073-1850	
Bulb Flashing 12V (735FI)	2073-1408	
Magnet (70 lb pull)	177-1	
Magnet (200lb pull)	177-200	

operates on two standard 6V spring terminal batteries (not included)

735S
735FI



BARRICADE LIGHTS



*operates on one
or two standard 6V
spring terminal
batteries
(not included)*

**747
747LED**

Model	747 & 747LED (sold in carton of 10)
Product Type	incandescent or LED - barricade light
Dimensions	H: 12 1/4" Depth: 3 1/2" W: 7 1/4"
Mounting	surface mount
Base Material	polypropylene, safety orange, thickest in industry
Specifications	
Voltages	6Vdc
Flash Patterns	stedi-burn, photocell or manual switch (model 747) photocell flashing (model 747LED)
Lens Colours (747)	amber, red, blue, clear, green
Lens Colour (747LED)	amber
Replacement Parts	
Optical Lens Complete	7076-1
Optical Lens Half	7076
Bulb Stedi Burn 6V	2073-1906
Bulb Flashing 6V	2073-1850
Bulb Flashing 12V	2073-1408



*operates on one
or two standard 6V
spring terminal
batteries
(not included)*


98-00660

Model	98-00660 (amber), 98-00661 (red)
Product Type	LED - barricade light with 12 LEDs on folding stand
Dimensions	H: 30 1/2" W: 8 1/2"
Mounting	stand up
Base Material	polypropylene
Specifications	
Voltages (Vdc)	6Vdc
Flash Patterns	triple flash
Lens Colours	amber, red, blue, clear, green



Proudly
Canadian

RAILROAD LANTERNS

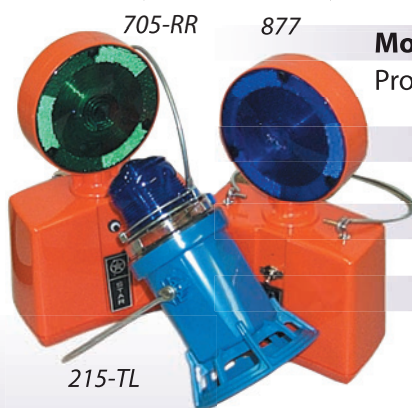

215-TL

705-RR

877

Model	215-TL <i>(sold in carton of 12)</i>
Product Type	flashing incandescent portable light with wire bail handle, standard blue lens
Dimensions	H: 9"
Base Material	polycarbonate
Specifications	
Voltages	6Vdc (battery not included) selectable flashing or stedi-burn

Model	877 <i>(sold in carton of 12)</i>
Product Type	bright failsafe portable light - spare bulb automatically switches in to operation should main bulb fail, wire bail handle, standard blue lens
Dimensions	H: 12 ¹ / ₁₆ " W: 7 ¹ / ₂ " Depth: 3 ⁵ / ₈ "
Base Material	polycarbonate
Specifications	
Voltages (Vdc)	12Vdc (2 spring terminal batteries not included) toggle on/off switch
Flash rate	65 fpm $\pm$ 10
Replacement Parts	
Lens	8041-1-Colour
Bulb	2073-1408

Model	705-RR <i>(sold in carton of 12)</i>
Product Type	flashing incandescent portable light with wire bail handle & center bracket, standard red/green lens
Dimensions	H: 12 ¹ / ₁₆ " W: 7 ¹ / ₂ " Depth: 3 ⁵ / ₈ "
Base Material	polycarbonate
Specifications	
Voltages (Vdc)	12Vdc (2 spring terminal batteries not included)
Replacement Parts	
Lens	8041-1-Colour
Bulb	2073-1408

215-TL
877
705-RR



500C

292

350Y

292
500C
350Y

Model	292 (sold in carton of 12)
Product Type	trainman's lantern with handle
Dimensions	Lens Diameter: 4 ³ / ₄ " L: 6 ³ / ₄ "
Base Material	polycarbonate
Specifications	
Voltages	6Vdc (battery not included) selectable signalling beam or brilliant spot beam

Replacement Parts

Lens	292-12
Bulb	2073-PR13
Screw in Base	292-13

Model	500C (sold in carton of 12)
Product Type	trainman's lantern with heavy duty wood and metal handle and metal stand
Dimensions	Lens Diameter: 4 ³ / ₄ " L: 6 ³ / ₈ "
Base Material	polycarbonate
Specifications	
Voltages	6Vdc (spring terminal battery not included) toggle on/off switch

Replacement Parts

Bulb	2073-PR13
------	-----------

Model	350Y
Product Type	battery operated flashlight
Dimensions	Lens Diameter: 2 ¹ / ₄ " L: 8"
Base Material	plastic
Specifications	
Voltages	uses 2-D cell batteries (not included) on/off switch

Replacement Parts

Bulb	2073-PR13
------	-----------



Proudly
Canadian

SELF-CONTAINED LED HEADS

TOWING KIT & TRAILER KIT



LDHEF-4
LDHEF-6



Model	LDHEF-4 & LDHEF-6
Product Type	LED - self contained, strobing pattern sequence LED heads
Popular Models	LDHEF-4-A (round, amber) LDHEF-4-R (round, red) LDHEF-4-B (round, blue) LDHEF-4-C (round, clear) LDHEF-6-A (oval, amber) LDHEF-6-R (oval, red) LDHEF-6-B (oval, blue) LDHEF-6-C (oval, clear)
Dimensions	model LDHEF-4 - 4" X 1 3/4" model LDHEF-6 - 6 3/8" X 2 1/3" X 1 3/4"
Product Features	heads may be synchronized rated for over 100,000 hours of use
Mounting	grommet
Base Material	rubber and polycarbonate
Specifications	
Voltages	12-48Vdc
Amps	< 0.8
Flashes per Minute	288fpm (quad flash)
Colours	amber, red, blue, clear

94104



Model	94104
Product Type	LED - Portable Towing kit (2) magnetic mount stop/tail/turn lights 30' input cable with 4 pin connector 10' connecting cable
Voltages (Vdc)	12Vdc

94105



Model	94105
Product Type	LED - submersible trailer kit (2) red stop/tail/turn lights (2) amber clearance lights, license bracket and all wiring and hardware.
Voltages	12Vdc

LED VEHICLE LIGHTING



✕ 91705

✕ 91735

✕ 92731

light only - 91725

light only - 92741



✕ 91741

light only - 91751

✕ 91750

light only - 91755



✕ 91410

light only - 91405

✕ 91415

light only - 91425

✕ 92405

light only - 92411



✕ 92415

light only - 92421

✕ 91420

light only - 91435

✕ 91430

light only - 91445



✕ 92201

✕ 92205

✕ 92301



✕ 92305

SPECIFICATIONS

91705 Oval 2" X 6" Stop/Tail/Turn kit, flush mount. Contains chromed plastic trim ring, 10 LEDs, hardwired

91735 Oval 2" X 6" Stop/Tail/Turn, 10 LEDs, red. Contains light, grommet & plug

92731 Oval 2" X 6" Turn/Park, 56 LEDs, amber, flanged. Contains light & plug

91736 Oval 2" X 6" flanged Stop/Tail/Turn, 56 LEDs, red. Contains light & pigtail

91741 Oval 2" X 6" Park/Turn, 48 LEDs, amber. Contains light, grommet & plug

91750 Oval 2" X 6" Stop/Tail/Turn, 48 LEDs, red. Contains light, grommet & plug

91410 Round 4" diameter Stop/Tail/Turn, with flange, 10 LEDs, red. Contains light & plug

91415 Round 4" Stop/Tail/Turn, 10 LEDs, red, grommet mounting. Contains light, grommet and plug

92405 Round 4" flanged, turn light, 34 LEDs, amber. Contains light & plug

92415 Round 4" lens, Stop/Tail/Turn, 34 LEDs, amber, flanged. Contains light, grommet & plug

91420 Round 4" lens, Stop/Tail/Turn, 34 LEDs, red, flanged. Contains light & pigtail

91430 Round 4" Stop/Tail/Turn, 34 LEDs, red, grommet mounting. Contains light, grommet & plug

92201 Round 2" amber Park/Turn, grommet mounting, 4 LEDs

92205 Round 2" red, clearance, grommet mounting, 4 LEDs

92301 Round 2.5" Clearance/Park light, 4 LEDs, amber. Uses grommet #83201, plug #88201

92305 Round 2.5" Clearance, 4 LEDs, red. Uses grommet #83201, plug #88201



Proudly Canadian

BRACKETS



X 98401

X 98400

X 98601

REFLECTORS



X 84101

X 84105

X 90103

GROMMETS



X 83201

X 83227

X 83720

PLUGS



X 88201

X 88874

X 88741



X 88720

SPECIFICATIONS

98401 Mounting bracket, flange bent at 90 degrees, fits 4" round Steel, black powder coat

98400 Mounting bracket, flat, fits 4" rounds. Steel, black powder coat

98601 Mounting bracket, bent at 90 degrees, fits 2" X 6" ovals. Steel, black powder coat

84101 Reflector, amber, 1 3/4" X 3 1/2", adhesive back, stainless trim ring

84105 Reflector, red, 1 3/4" X 3 1/2" adhesive back, stainless trim ring

90103 License light, 2 5/8" H X 4" W, white body

83201 Grommet, round, 2", black rubber

83227 Grommet, round, 4", black rubber

83720 Grommet, fits oval 2" X 6", black rubber

88201 Plug for 2" and 2 1/2" Marker/Clearance light, 6" leads, white and black Fits #92201, 92205, 92301 & 92305

88874 Plug for Stop/Tail/Turns and 4" Clearance/Park lights and ovals 10" Leads, black, red, white. Interchangeable with #88720

88741 Plug for 4" multi LED lights,

88720 Plug for Stop/Tail/Turns and 4" Clearance/Park lights and ovals interchangeable with #88874



BACK-UP ALARM

- Amps - 0.25
- Input -12-48Vdc
- Encapsulated electronics
- Stainless speaker diffuser (excluding #63-000)
- Die cast housings are powder coat protected

63-000



61



99901



62



60



Back-up Alarms

Model #	Housing	Single Tone	db Levels Dual Tone	Steady Tone	Dimensions H x W x D
60	Die Cast	87,97,102,107,112	97,102	107	3 1/16" x 4 9/16" x 2"
61	Die Cast	107, 112	107,112	107,112	4 7/8" x 6 1/8" x 2 5/8"
62	ABS	87,97,102,107,112	97,102	107	3 1/16" x 4 9/16" x 2"
99901	ABS	97	na	na	3 1/16" x 4 9/16" x 3"
63-000	ABS	87-112db Auto Adjusts to 10db above surrounding noise			3" x 5" x 3 3/4"



Proudly Canadian

SWITCH PANELS & BOXES

12VDC, SWITCHES FUSED AT 15 AMPS UNLESS SPECIFIED OTHERWISE



766150



766152



766155



766153



766154



SB1515



SB3015



SB4020



63-642



63-643



SB4020T



SB4425T

Switches

Model #	Type	# of Sw	Individual Switch Function									
			Sw #1	Sw #2	Sw #3	Sw #4	Sw #5	Sw #6	Sw #7	Sw #8	Sw #9	Sw #10
766150	Panel	1	on/off	-	-	-	-	-	-	-	-	-
766152	Panel	2	on/off	on/off	-	-	-	-	-	-	-	-
766153	Panel	3	on/off	on/off	on/off	-	-	-	-	-	-	-
766154	Panel	4	on/off	on/off	on/off	on/off	-	-	-	-	-	-
766155	Panel	2	on/off	3-position								
766161	Panel	2	on/off	3 - position - Remote strobe kits								
766163	Panel	2	on/off	Momentary - momentary used as pattern select								
SB1515	Box	4	on/off	on/off	on/off	on/off	-	-	-	-	-	-
SB3015	Box	4	on/off	on/off	on/off	on/off (30A)	-	-	-	-	-	-
SB4020	Box	6	on/off	on/off	on/off	on/off	on/off	on/off (40A)	-	-	-	-
SB4020T	Box	6	on/off	on/off	on/off	on/off	on/off	on/off (40A)	-	-	-	-
SB4425T	Box	10	on/off	on/off (40A)	on/off (40A)	on/off (40A)	on/off (40A)	on/off (20A)	on/off (20A)	on/off (20A)	on/off (20A)	on/off (20A)
63-642	Mechanical backup alarm switch (single direction). Install adjacent to gear shift lever linkage											
63-643	Mechanical backup alarm switch (any direction). Install adjacent to gear shift lever linkage											

*Switch #1 (on/off) lit only

Note: Switches in boxes are individually fused

SB4020 & SB4020T Contains 5 switches fused at 20amps & 1- 40amp circuit breaker



Proudly Canadian

MOUNT BOXES



✕ 121BX



✕ 122BX



✕ 123BX




✕ 131BX



✕ 132BX



✕ 133BX



✕ 141BX



✕ 142BX



✕ 143BX

SPECIFICATIONS

Heavy duty (.100" 12 AWG) and light duty (.060" 16 AWG) mount boxes

121BX heavy duty, for one 6" oval head
4" X 9" X 3 1/2"
weight: 6 lbs.

122BX heavy duty, for two 6" oval heads
4" X 17" X 3 1/2"
weight: 9 lbs.

123BX heavy duty, for three 6" oval heads
4" X 25" X 3 1/2"
weight: 12 lbs.

131BX light duty, for one 6" oval head
4" X 9" X 3 1/2"
weight: 2 lbs.

132BX light duty, for two 6" oval heads
4" X 17" X 3 1/2"
weight: 5 lbs.

133BX light duty, for three 6" oval heads
4" X 25" X 3 1/2"
weight: 8 lbs.

141BX light duty, for one 4" round head
6 1/4" X 6 1/4" X 3 1/2"
weight: 2 lbs.

142BX light duty, for two 4" round heads
6 1/4" X 12 1/2" X 3 1/2"
weight: 5 lbs.

143BX light duty, for three 4" round heads
6 1/4" X 18 3/4" X 3 1/2"
weight: 8 lbs.



Proudly Canadian

MAGNETS & MAGNETIC MOUNT KITS



Replacement Magnets









Model #	Description
177	70lb pull, 2 5/8" D x 7/8" hole with 1/2" NPT nut. Works with any 1/2" NPT mount Low/Med. profile beacon.
177-25	70lb pull, 2 5/8" D x 1/4" hole. Works with 204RM, 16xxx, 24xxx units.
177-35	35lb pull, only 2" D x 3/16" hole. Works with 9200x series units.

Magnet Conversion Kits

Model #	Description
96000	Converts any 16xxx, 24xxx Mini Bar to magnetic mount. 4-magnets, cigarette plug, hardware supplied.
179	Converts any beacon using 1/2" NPT feature to magnetic mount. 1-magnet, cig.plug, hardware supplied.
920-18	Converts 9200x style units to magnetic mount. Includes 4-magnets, cigarette plug, hardware.
178	Converts 200A & 450A series units to magnetic mount. Includes plate, 3-magnets, cig.plug, hardware.
178-2	Converts 201B & 400B series units to magnetic mount. Includes 3-magnets, cigarette plug, hardware.
177-1	Converts 735 & 747 series units to magnetic mount. Includes 2-magnets, hardware.
177-S	Converts 5001 series units to magnetic mount. Includes magnet, hardware.
177-200	Converts 735 & 747 series units to magnetic mount. (200lb pull mags) 4 3/4" 1/4" hole, Includes 2-magnets, hardware.

**Magnets
&
Mag. Mt. Kits**


STROBE TUBES & BULBS

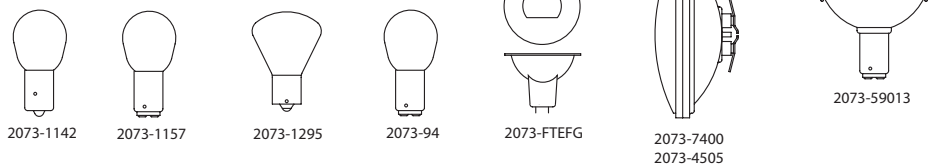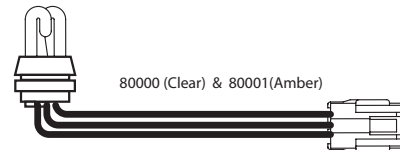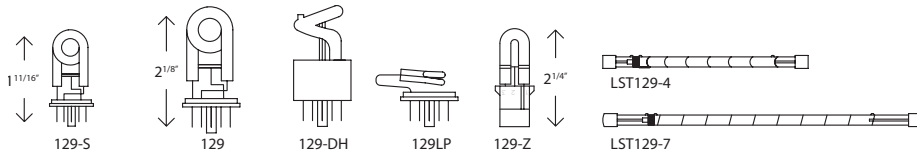


Proudly
Canadian

SWS MOUNTING SOLUTIONS™


On the following pages you will find a mounting solution to suit any of your rack mounting needs. We currently offer a mounting solution for virtually our entire product line. These hardware kits can also be used for warning light products from other manufacturers that you may currently have. If there is a mounting solution you require that is not included in the following pages, please do not hesitate to contact us at 1-877-357-0222 and we will do our best to accommodate your needs. We hope these mounting solutions in conjunction with our lighting products can now truly provide you with the entire package, start to finish!

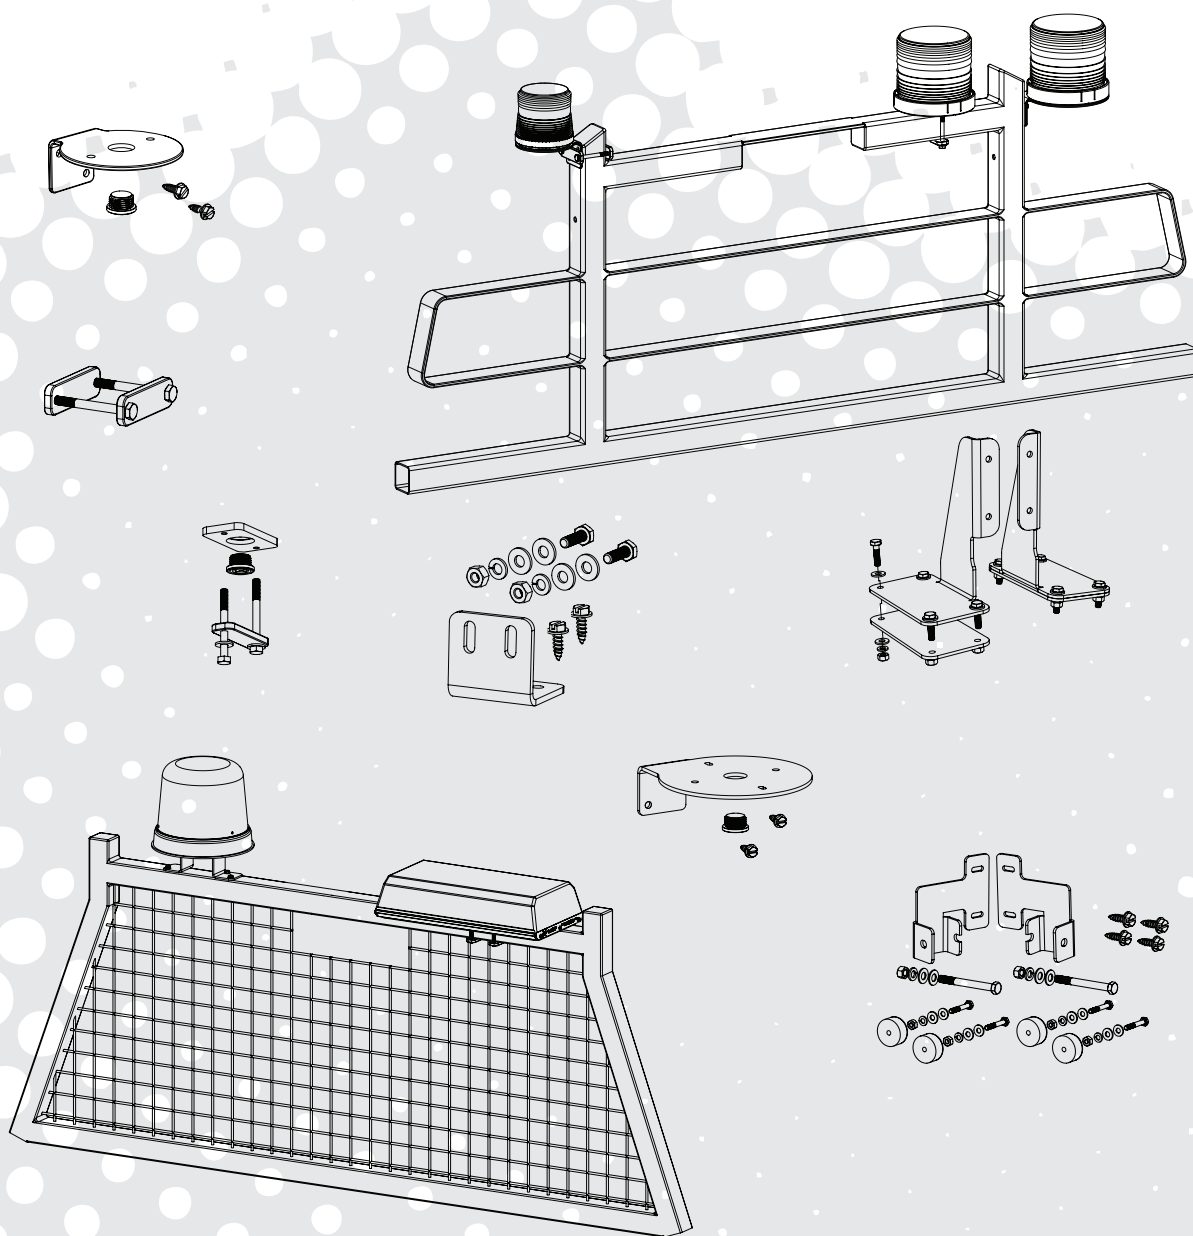

SWS MOUNTING SOLUTIONS™

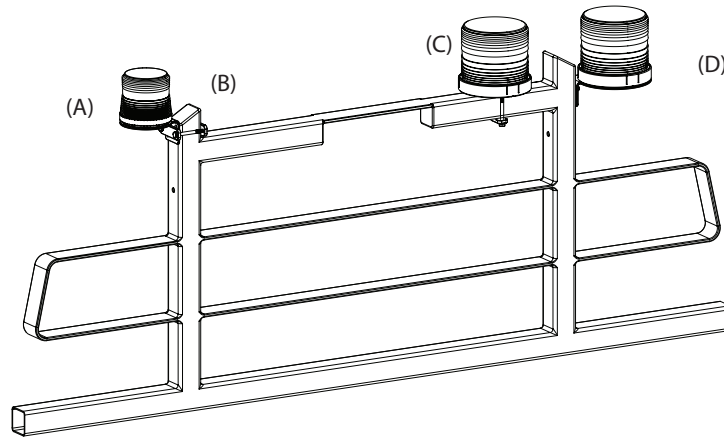


A

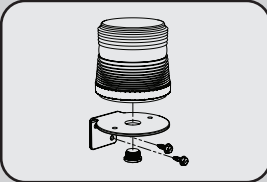


Low profile beacon mounting bracket kit for models 200Z and 201Z.
bracket kit shown #98008

B

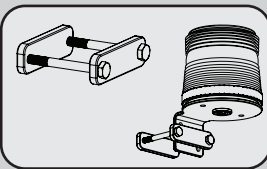


Optional clamp mounting is available for all beacon brackets for those who don't want to drill holes. Installation requires only a socket wrench.
universal clamp kit shown #98009 attached to bracket #98008

C

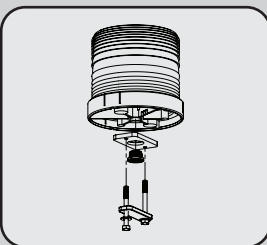

An easy-to-install clamp mounts any 1/2" NPT beacon to a truck rack, ladder rack or roof rack.
clamp kit shown #98010

D

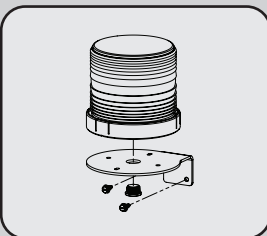


Medium profile beacon mounting brackets are available in right and left versions with self-drilling screw installation for models 27XXX, 200S, 208R and 204R.
bracket kit shown #98006, passenger side mount also available in driver side mount #98007

All SWS brackets are steel with a tough black powder coat finish to resist wear and corrosion. All brackets come with an assortment of zinc-plated steel hardware for mounting.




Proudly Canadian

SWS MOUNTING SOLUTIONS™

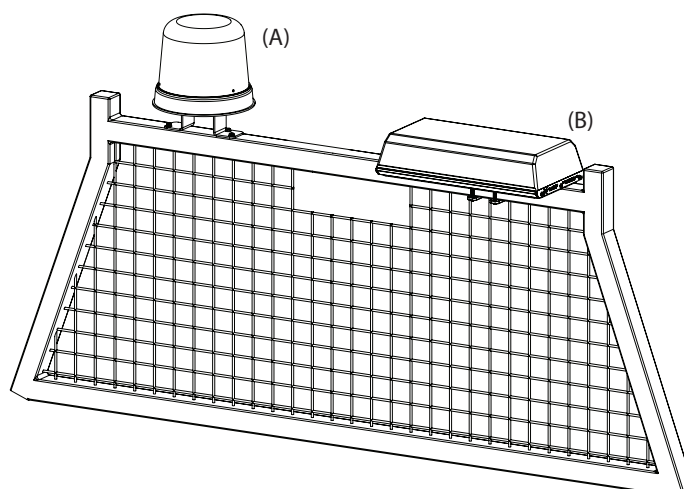


A

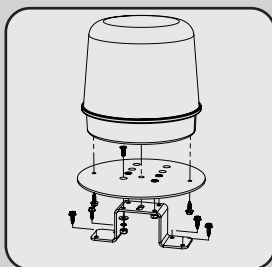


For surface mounting or to get a little extra height on a truck rack, the C-bracket kit is available with self-drilling screw installation.
*C-bracket shown #98014
mounted with mounting plate #98011*

B

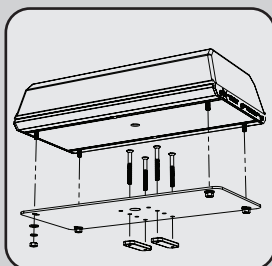


Any size SWS mini light bar can be securely mounted to a truck rack, ladder rack or roof rack using a mounting plate and clamp kit. Holes are provided for center or offset mounting.
*mounting plate for 16" mini light bar #98012
with clamp kit #98015 shown
mounting plate for 24" mini light bar #98013*

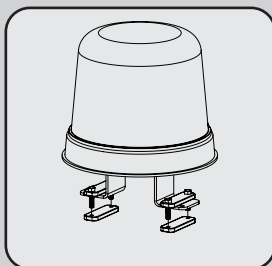


The SWS universal clamp kit can be used to secure a C-bracket without drilling holes in your truck rack.
*C-bracket shown #98014
mounted with two universal clamp kits #98009*

All SWS brackets are steel with a tough black powder coat finish to resist wear and corrosion. All brackets come with an assortment of zinc-plated steel hardware for mounting.

SWS MOUNTING SOLUTIONS™

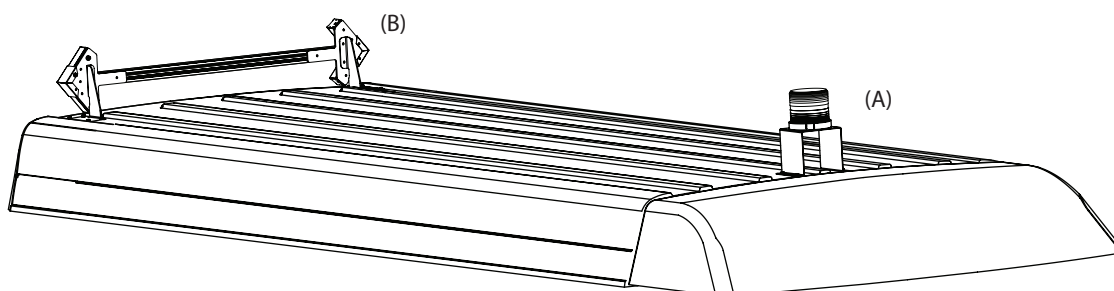


A

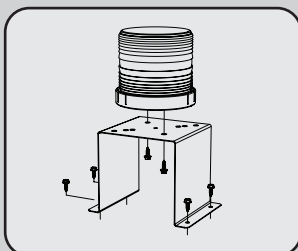

The roof top medium profile beacon kit can be used to through-hole mount any medium profile beacon to the roof of a van or truck.

rooftop medium profile beacon kit #98002

B

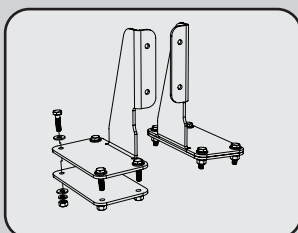

Roof top and through-hole mounting of high power traffic arrows is easy with our roof top bracket kit. Kit includes bearing plate for the underside of the roof and an assortment of hardware.


rooftop high power traffic arrow mounting kit #98001

All SWS brackets are steel with a tough black powder coat finish to resist wear and corrosion. All brackets come with an assortment of zinc-plated steel hardware for mounting.




Proudly
Canadian

SWS MOUNTING SOLUTIONS™

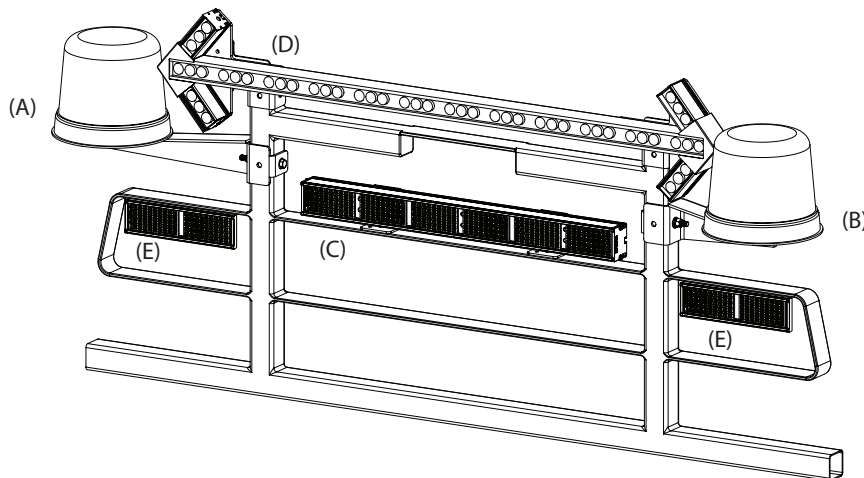

A & B

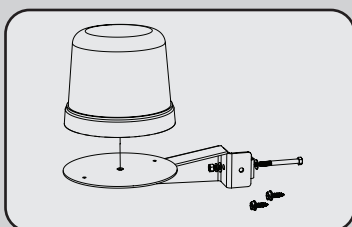


Large profile beacons can be mounted to truck racks without drilling using the side beacon mount available in left and right configurations. Also included, self-drilling screws for more mounting options.

driver side mount kit shown #98005

also available in passenger side mount #98004

C

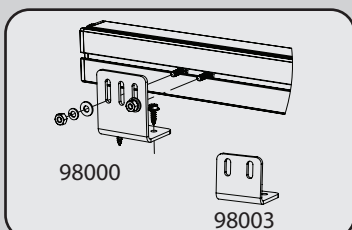

98000


98003

Traffic directors of all kinds and sizes are easily mounted to any surface with L-bracket kits. Ask your SWS Sales Rep for different configurations available.

L-bracket mounting shown #98000

also available in shorter L-bracket #98003


D

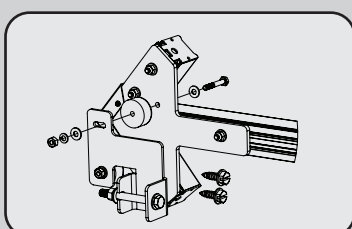

Our 48" high power traffic arrows bolt to Back Rack series truck racks without drilling. Self-drilling screws are included for more flexibility in mounting locations and positions.

traffic arrow mount shown #98016 (includes left and right brackets plus hardware)

E

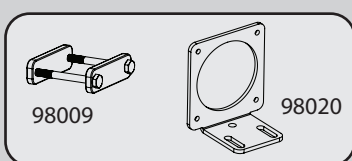

98009

98020

SLE warning sticks easily mounted to any surface with bracket #98020. Also included, self-drilling screws for more mounting options. Use universal clamp kit #98009 for those who don't want to drill holes.

All SWS brackets are steel with a tough black powder coat finish to resist wear and corrosion. All brackets come with an assortment of zinc-plated steel hardware for mounting.



SWS MOUNTING SOLUTIONS™



Kit #	Description
98000	High density traffic director mounting bracket kit
98001	High power traffic arrow roof top mounting bracket kit
98002	Roof top medium beacon mounting bracket kit (6" tall)
98003	High power traffic director mounting bracket kit
98004	Passenger side large beacon truck rack mounting bracket kit
98005	Driver side large beacon truck rack mounting bracket kit
98006	Passenger medium beacon mounting bracket kit
98007	Driver medium beacon mounting bracket kit
98008	Small beacon mounting bracket kit
98009	Universal bracket clamp kit
98010	1/2" NPT beacon clamp mounting kit
98011	Large beacon mounting bracket kit, order with 98014 or 98015 below
98012	16" mini light bar mounting bracket kit, order with 98014 or 98015 below
98013	24" mini light bar mounting bracket kit, order with 98014 or 98015 below
98014	C-bracket kit
98015	Clamp kit
98016	High power traffic arrow truck rack mounting bracket kit
98017	Driver side Medium profile beacon mounting bracket fit for 7" flange
98018	Passenger Medium profile beacon mounting bracket fit for 7" flange
98020	Truck rack mounting bracket for SLE warning sticks

All SWS brackets are steel with a tough black powder coat finish to resist wear and corrosion. All brackets come with an assortment of zinc-plated steel hardware for mounting.



DISPLAY RACK KITS

SLAT WALL KIT



We offer a slat wall shelving kit with 12", 18" and 24" shelves. Complete with cables and cigarette plug receptacle. Call factory for more information.

DISPLAY RACK KIT

We also offer a display rack shelving kit with 12", 18" and 24" shelves on a rugged display rack. Complete with cables and cigarette plug receptacle. Call factory for more information.



Proudly
Canadian

SALES & SERVICE CONTACTS

OUR NUMBER 1 PRIORITY IS YOU!

We are here to serve you, so if at any time you require assistance, please do not hesitate to contact us either via phone, email or fax.

We pride ourselves on being a customer oriented organization and strive to provide service that is unparalleled in the warning light industry. Our staff is knowledgeable and can assist with any technical questions or concerns you may have.

If you have any unique or specialized applications, do not hesitate to contact us. A solution to your lighting need is just a phone call away!

INSIDE SALES & SERVICE

- ♦ **Sales**
Sales@SWSCanada.com

When you need to place an order, ask a technical question, or check the status of an order, call our inside sales and service representatives. They are your first line of contact for any questions or concerns you may have and they are here to assist you.

SALES REP INFORMATION

- ♦ **Sales**
Sales@SWSCanada.com

If you would like to meet with, or speak to a sales representative in your area, please call our Sales and Marketing Coordinator, who will be happy to connect you with the appropriate representative.

REPAIRS & SERVICE

- ♦ **Repairs**
Repairs@SWSCanada.com

All repairs go through our service department. If you require information regarding a faulty product, please do not hesitate to call and ask for the repair department.

FACTORY REPRESENTATIVE

- ♦ **Sales**
Sales@SWSCanada.com

If you require assistance with product troubleshooting or application concerns, please call and ask to speak to our factory rep who can provide technical expertise on our entire product line.



STAR WARNING SYSTEMS

7695 Blackburn Parkway
Niagara Falls, Ontario • L2H 0A6 • Canada
Phone: 905.357.0222 Fax: 905.357.9122
Email: sales@SWSCanada.com

Toll Free: 1.877.357.0222
Web: www.SWSCanada.com



Proudly
Canadian

SWS WARRANTY POLICIES

LIMITED WARRANTY/RETURN POLICY EFFECTIVE JANUARY 1, 2005

Star Warning Systems ("SWS") warrants each new product manufactured by SWS determined defective in material or workmanship for periods listed in this Limited Warranty. This warranty is non-transferable. Warranty applies to the original end user purchaser of the product and is terminated upon resale or any subsequent purchaser or owner of the product.

To obtain warranty, products must be installed and used in accordance with manufacturer's recommendations. Product/components will be repaired or replaced, at the discretion of Factory Repair Department, providing product is used under normal working conditions. Warranty will not be honored if product is altered, installed improperly, abused, misused, physically damaged, wired incorrectly, serial numbers/date codes removed, altered or rendered illegible. Also damages incurred by shipping, and incorrect fuse rating will not be covered.

All product warranties listed below include ELECTRONICS ONLY. Housings, bases, enclosures are covered under warranty for a period of 1-year.

Product returned for repair, which has exceeded listed warranty period, is to be returned for evaluation of parts and labour costs.

There are no warranties expressed or implied (including any warranty of merchantability or fitness), which extend these warranty periods. The loss of use of the product, loss of time, inconvenience, commercial loss or consequential damages, including costs of any labour, is not covered. The manufacturer reserves the right to change the design of the product without assuming any obligation to modify any product previously manufactured.

Star Warning Systems reserves the right to modify or update Limited Warranty and/or product at any time without prior notification.

SWS PRODUCTS

LED Warning Lights. Includes all Arrows, LED Traffic Directors (**Excludes controller), RLK, 16xxx, 20xxx, 22xxx, 24xxx, 51xxx, 53xxx, 56xxx, 58xxx, 56xxx, 67xxx Series

Warranty Period: 5 years

All Strobe Power Supplies, unless otherwise specified.

Warranty Period: 3 years

Back up Alarms

Warranty Period: 2 years

All Rotator Assemblies. Includes 20xx, 400x, 420x, 450x, 451x, 9xxx, 16xxx, 24xxx, 5xxx, 8xxx Series

Warranty Period: 1 year

Sirens, Speaker Drivers, LED Clearance/stop/tail/turn Series, Strobe tubes, Lanterns, Flashers

Warranty Period: 1 year

Traffic Arrow/Director Controllers, Flashing Incandescent Beacons. Includes 20ZI, 201ZI, 20FI, 735FI, 747, 5001, ITD Series

Warranty Period: 1 year

Switches/panels/boxes, accessories

Warranty Period: 1 year

Incandescent/Halogen Bulbs

Warranty Period: 6 months

All Signal Products

Warranty Period: 1 year

WARRANTY RETURN PROCEDURE- OBTAINING RMA#

To receive immediate repair work, an RMA # must be obtained. All non-compliance returns will not be given priority status for repair. Return shipping charges will apply to accounts not using RMA #'s.



Proudly
Canadian

SWS WARRANTY POLICIES CONT.

PLEASE CHECK BEFORE RETURNING- insure part is properly tested at product input wires. Inspect crimping, fuses, bulbs, strobe tubes, supply voltage at product (voltage drop due to under size conductors).

Note- Full shipping and repair charges will apply if any of these areas are determined to cause product failure.

Any product determined to be unwarrantable will be returned to sender, freight collect.

- 1) Distributor to call Factory Repair Dept. toll free (1-877-357-0222) to obtain a returned goods authorization number (RMA#).
- 2) Call Factory to obtain courier account number (prepaid by Factory).
- 3) Ship product to Factory, clearly mark carton with RMA#. Ship to 7695 Blackburn Pkwy. Niagara Falls, On. L2H OA6
- 4) Include copy of original sales receipt.
- 5) Include statement containing the following information: contact name, company name, problem with product, return address, telephone number.
- 6) SWS-Star Warning Systems will ship repaired product prepaid to Distributor if work is done under Warranty.

1 YEAR OVER-COUNTER REPLACEMENT WARRANTY

SWS product deemed defective by selling distributor, qualifies for replacement free of charge for a period of 1 year from original date of purchase. This warranty falls under the same requirements as listed in the Limited Warranty. Products deemed by SWS Repair Department to have been altered, installed improperly, abused, misused, physically damaged, wired incorrectly, not used under normal working conditions, or damaged by incorrect fuses, will not qualify for warranty work. Distributor must obtain RMA# before issuing new replacement product to customer. If blown fuse or bulb/tube, product will not qualify for Over-Counter Policy.



Proudly
Canadian

PRODUCT INDEX

1204.....	p.69	16051.....	p.20	16882.....	p.20
121BX.....	p.79	16052.....	p.20	16884.....	p.20
122BX.....	p.79	16053.....	p.20	16884.....	p.21
123BX.....	p.79	16056.....	p.20	16885.....	p.20
129.....	p.81	16071.....	p.20	16886.....	p.20
129-CG3601.....	p.81	16072.....	p.21	16887.....	p.20
129-DH.....	p.81	16073.....	p.21	16890.....	p.20
129LP.....	p.81	16075.....	p.21	16891.....	p.20
129-S.....	p.81	16101.....	p.18	16894.....	p.20
129-Z.....	p.81	16102.....	p.18	16895.....	p.20
131BX.....	p.79	16106.....	p.18	16915.....	p.22
132BX.....	p.79	16107.....	p.18	16916.....	p.22
133BX.....	p.79	16110.....	p.18	16917.....	p.22
141BX.....	p.79	16111.....	p.18	16918.....	p.22
142BX.....	p.79	16300.....	p.69	16919.....	p.22
143BX.....	p.79	16301.....	p.18	16920.....	p.22
15007.....	p.69	16303.....	p.69	16921.....	p.22
15011.....	p.69	16401.....	p.18	16922.....	p.22
15012.....	p.69	16402.....	p.18	16923.....	p.22
15013.....	p.69	16405.....	p.18	16923.....	p.22
15201.....	p.69	16600.....	p.20	16950.....	p.22
15202.....	p.69	16601.....	p.20	16951.....	p.22
15203.....	p.69	16602.....	p.20	16952.....	p.22
15303.....	p.69	16604.....	p.20	16953.....	p.22
15304.....	p.69	16750.....	p.21	16954.....	p.22
15305.....	p.69	16751.....	p.21	16955.....	p.22
15306.....	p.69	16752.....	p.21	16956.....	p.22
15311.....	p.69	16753.....	p.21	16957.....	p.22
16001.....	p.18	16754.....	p.21	16958.....	p.22
16002.....	p.18	16755.....	p.21	16959.....	p.22
16006.....	p.18	16756.....	p.21	177.....	p.80
16007.....	p.18	16757.....	p.21	177-1.....	p.80
16011.....	p.18	16801.....	p.18	177-200.....	p.80
16014.....	p.18	16802.....	p.18	177-25.....	p.80
16017.....	p.18	16806.....	p.18	177-35.....	p.80
16018.....	p.18	16807.....	p.18	177-S.....	p.80
16019.....	p.18	16814.....	p.19	178.....	p.80
16021.....	p.19	16815.....	p.19	178-2.....	p.80
16022.....	p.19	16831.....	p.19	179.....	p.80
16026.....	p.19	16832.....	p.19	17920.....	p.69
16027.....	p.19	16836.....	p.19	18000.....	p.69
16031.....	p.19	16837.....	p.19	2000.....	p.68
16032.....	p.19	16842.....	p.19	200A-12V-A.....	p.6
16033.....	p.19	16843.....	p.19	200A-12V-B.....	p.6
16037.....	p.19	16871.....	p.20	200A-12V-C.....	p.6
16041.....	p.20	16875.....	p.20	200A-72V-A.....	p.6
16042.....	p.20	16876.....	p.20	200A-72V-B.....	p.6
16046.....	p.20	16877.....	p.20	200A-72V-C.....	p.6
16047.....	p.20	16881.....	p.21	200APC-12V-A.....	p.6



Proudly
Canadian

PRODUCT INDEX

200APC-12V-B.....	p.6	201B-72V-B	p.7	2067-20X	p.69
200APC-12V-C	p.6	201B-72V-C	p.7	2067-32	p.69
200BC-12V-A	p.7	201BPC-12V-A.....	p.7	2067-32X	p.69
200BC-12V-B	p.7	201BPC-12V-B.....	p.7	2067-D	p.69
200BC-12V-C	p.7	201BPC-12V-C.....	p.7	2067-X	p.69
200BC-72V-A	p.7	201Z-12V-A.....	p.14	2067-Y.....	p.69
200BC-72V-B	p.7	201Z-12V-B	p.14	2073-1142	p.81
200BC-72V-C	p.7	201Z-12V-C	p.14	2073-1157	p.81
200C-12V-A.....	p.6	201Z-12V-R	p.14	2073-1295	p.81
200C-12V-B.....	p.6	201Z-24V-A.....	p.14	2073-4505	p.81
200C-12V-C.....	p.6	201Z-24V-B	p.14	2073-59013.....	p.81
200C-72V-A.....	p.6	201Z-24V-C	p.14	2073-64111	p.81
200C-72V-B.....	p.6	201Z-24V-R	p.14	2073-7400	p.81
200C-72V-C.....	p.6	201ZB-12V-A	p.14	2073-795	p.81
200S-12V-A	p.9	201ZB-12V-B.....	p.14	2073-797.....	p.81
200S-12V-B	p.9	201ZM/878-G.....	p.14	2073-94	p.81
200S-12V-C	p.9	201ZM-12V-A.....	p.14	2073-FTEFG.....	p.81
200S-72V-A	p.9	201ZM-12V-B	p.14	2073-H27	p.81
200S-72V-B	p.9	201ZM-12V-C.....	p.14	2073-H27-24W.....	p.81
200S-72V-C	p.9	201ZM-12V-G.....	p.14	2073-H50W-125	p.81
200SDM-12V-A	p.9	201ZM-12V-R	p.14	2073-H50W-24V.....	p.81
200SDM-12V-B	p.9	201ZM-24V-A.....	p.14	208R-12V-A	p.11
200SDM-12V-C	p.9	201ZMV-A	p.14	208R-12V-B	p.11
200SM-12V-A	p.9	201ZMV-B.....	p.14	208RDM-12V-A.....	p.11
200SM-12V-B.....	p.9	201ZMV-C.....	p.14	208RDM-12V-B	p.11
200SM-12V-C	p.9	201ZMVM-A.....	p.14	208RM-12V-A	p.11
200SPC-12V-A.....	p.9	201ZMVM-B.....	p.14	208RM-12V-B	p.11
200SPC-12V-B	p.9	201ZMV-R.....	p.14	208RPC-12V-A.....	p.11
200SPC-12V-C	p.9	2020.....	p.68	208RPC-12V-B.....	p.11
200SQM-12V-A.....	p.9	2020-10	p.69	208RQM-12V-A.....	p.11
200SQM-12V-B	p.9	2020-10X	p.69	208RQM-12V-B	p.11
200SQM-12V-C	p.9	2020-20	p.69	2100.....	p.68
200Z-12V-A	p.13	2020-20X	p.69	2110.....	p.68
200Z-12V-B	p.13	2020-32	p.69	212-TUBE	p.81
200Z-12V-C	p.13	2020-D	p.69	215-TL.....	p.72
200Z-12V-R	p.13	2020-X	p.69	22101	p.5
200Z-24V-A	p.13	2020-Y.....	p.69	22102	p.5
200Z-24V-B	p.13	2049.....	p.68	22105	p.5
200Z-24V-C	p.13	204R-12V-A	p.11	22106	p.5
200Z-24V-R	p.13	204R-12V-B	p.11	22109	p.5
200ZM-12V-A.....	p.13	204R-24V-A.....	p.11	22311	p.5
200ZM-12V-B	p.13	204R-24V-B	p.11	22312	p.5
200ZM-12V-C	p.13	204RM-12V-A.....	p.11	22315	p.5
200ZM-12V-G.....	p.13	204RM-12V-B	p.11	22316	p.5
200ZM-12V-R	p.13	2051.....	p.68	22319	p.5
201B-12V-A.....	p.7	2067.....	p.68	22601	p.5
201B-12V-B	p.7	2067-10	p.69	22603	p.5
201B-12V-C	p.7	2067-10X	p.69	2300LED.....	p.26
201B-72V-A.....	p.7	2067-20	p.69	2300SL	p.26



Proudly
Canadian

PRODUCT INDEX

2300SLD.....	p.26	24215.....	p.24	274-DLX3U.....	p.64
24001.....	p.23	24216.....	p.24	274-DLX3W.....	p.64
24002.....	p.23	2421SLD.....	p.27	28001.....	p.17
24003.....	p.23	24253.....	p.24	28002.....	p.17
24004.....	p.23	24255.....	p.24	28003.....	p.17
24005.....	p.23	25000.....	p.8	28004.....	p.17
24006.....	p.23	25001.....	p.8	28005.....	p.17
24008.....	p.23	25002.....	p.8	28011.....	p.17
24009.....	p.23	25003.....	p.8	28012.....	p.17
2400LED.....	p.27	25005.....	p.8	28013.....	p.17
2400SL.....	p.27	2500LED.....	p.28	28014.....	p.17
2400SLD.....	p.27	2500SL.....	p.28	28015.....	p.17
24010.....	p.24	2500SLD.....	p.28	28016.....	p.17
24011.....	p.24	25051.....	p.8	28017.....	p.17
24015.....	p.24	2510LED.....	p.28	28018.....	p.17
24016.....	p.24	2510SL.....	p.28	28019.....	p.17
2401LED.....	p.27	27001.....	p.10	28020.....	p.17
24021.....	p.25	27002.....	p.10	28031.....	p.17
24022.....	p.25	27006.....	p.12	28032.....	p.17
24025.....	p.25	27007.....	p.12	28033.....	p.17
24026.....	p.25	27011.....	p.10	28034.....	p.17
24028.....	p.25	27012.....	p.10	28035.....	p.17
24030.....	p.24	27013.....	p.10	292.....	p.73
24032.....	p.25	27016.....	p.12	3000.....	p.68
24036.....	p.25	27017.....	p.12	3006.....	p.68
24044.....	p.23	27018.....	p.12	30100.....	p.69
24045.....	p.23	27021.....	p.10	3049.....	p.68
24048.....	p.23	27022.....	p.10	3051.....	p.68
24051.....	p.24	27026.....	p.12	3066.....	p.68
24053.....	p.24	27027.....	p.12	3067.....	p.68
24055.....	p.24	27041.....	p.10	3100.....	p.68
24080.....	p.25	27042.....	p.10	3106.....	p.68
24081.....	p.25	27051.....	p.10	3151.....	p.68
24082.....	p.25	27052.....	p.10	350Y.....	p.73
24101.....	p.23	27057.....	p.10	3830.....	p.63
24102.....	p.23	27058.....	p.10	39000.....	p.69
24103.....	p.23	27061.....	p.10	3901.....	p.63
24104.....	p.23	27062.....	p.10	3901-11.....	p.81
24105.....	p.23	27066.....	p.12	3901-Colour.....	p.81
24106.....	p.23	27067.....	p.12	3904.....	p.63
24107.....	p.23	27081.....	p.12	3920.....	p.63
2410LED.....	p.27	27082.....	p.12	3930.....	p.63
24115.....	p.24	27086.....	p.12	3930E.....	p.63
24116.....	p.24	27087.....	p.12	400A-12V-A.....	p.15
2411LED.....	p.27	27088.....	p.12	400A-12V-B.....	p.15
24153.....	p.24	27091.....	p.10	400A-24V-A.....	p.15
24155.....	p.24	274-DLX3D.....	p.64	400A-24V-B.....	p.15
24207.....	p.23	274-DLX3RL.....	p.64	400ARFI-24-A.....	p.15
2420SLD.....	p.27	274-DLX3T.....	p.64	400ARFI-24-B.....	p.15



Proudly
Canadian

PRODUCT INDEX

400A-RFI-A	p.15	50540	p.52	51003	p.57
400A-RFI-B	p.15	50544	p.52	51008	p.57
400B-12V-A	p.15	50546	p.52	51013	p.57
400B-12V-B	p.15	50548	p.52	51016	p.57
400B-24V-A	p.15	50552	p.52	51019	p.57
400B-24V-B	p.15	50554	p.52	51022	p.57
420A-12V-A	p.16	50556	p.52	51025	p.57
420A-12V-B	p.16	50904	p.49	51028	p.57
420A-12V-C	p.16	50905	p.49	51031	p.57
420A-24V-A	p.16	50906	p.49	51032	p.57
420A-24V-B	p.16	50910	p.49	51035	p.57
420A-24V-C	p.16	50911	p.49	51038	p.57
4500	p.63	50912	p.49	51041	p.57
4501	p.63	50916	p.49	51046	p.57
450A-12V-A	p.16	50917	p.49	51051	p.57
450A-12V-B	p.16	50918	p.49	51056	p.57
450A-12V-C	p.16	50922	p.50	51061	p.57
450A-24V-A	p.16	50923	p.50	51065	p.57
450A-24V-B	p.16	50924	p.50	51074	p.57
450A-24V-C	p.16	50928	p.50	51077	p.57
451B-12V-A	p.16	50929	p.50	51082	p.57
451B-12V-B	p.16	50930	p.50	51085	p.57
451B-12V-C	p.16	50934	p.50	51088	p.57
451B-24V-A	p.16	50935	p.50	51091	p.57
451B-24V-B	p.16	50936	p.50	51094	p.57
451B-24V-C	p.16	50940	p.50	5149	p.68
49000	p.69	50941	p.50	5167	p.68
49030	p.69	50942	p.50	5300H	p.29
49420	p.69	50943	p.50	5300S	p.29
5001	p.70	50946	p.50	5300SL	p.29
5001H	p.70	50947	p.50	53731	p.60
5001HM	p.70	50948	p.50	53741	p.60
5001HS	p.70	50952	p.50	53751	p.60
5001M	p.70	50953	p.50	53761	p.60
500C	p.73	50954	p.50	53801	p.60
50504	p.52	50955	p.50	53802	p.60
50506	p.52	50958	p.50	53805	p.60
50508	p.52	50959	p.50	53806	p.60
50512	p.52	50960	p.50	53815	p.60
50514	p.52	50964	p.50	53816	p.60
50516	p.52	50965	p.50	53825	p.60
50520	p.52	50966	p.50	53826	p.60
50522	p.52	50970	p.50	53830	p.60
50524	p.52	50971	p.50	53831	p.60
50528	p.52	50972	p.50	53835	p.60
50530	p.52	50976	p.50	53836	p.60
50532	p.52	50977	p.50	53840	p.60
50536	p.52	50978	p.50	53841	p.60
50538	p.52	51000	p.57	53845	p.60


Proudly
Canadian

PRODUCT INDEX

53846.....	p.60	56934.....	p.59	58057.....	p.56
53850.....	p.60	56936.....	p.59	58058.....	p.56
53851.....	p.60	57060.....	p.56	58059.....	p.56
53855.....	p.60	57070.....	p.56	58061.....	p.56
53856.....	p.60	58000.....	p.54	58063.....	p.56
53860.....	p.60	58001.....	p.54	58080.....	p.53
53861.....	p.60	58002.....	p.54	58081.....	p.53
5400H.....	p.30	58003.....	p.54	58082.....	p.54
5400S.....	p.30	58006.....	p.53	58083.....	p.54
5401H.....	p.30	58007.....	p.53	58084.....	p.54
5401LED.....	p.32	58008.....	p.53	58085.....	p.54
5401S.....	p.30	58009.....	p.53	58086.....	p.54
5402HSL.....	p.30	58011.....	p.56	58087.....	p.54
5410LED.....	p.32	58014.....	p.54	58088.....	p.54
5411LED.....	p.32	58015.....	p.54	58089.....	p.54
5420LED.....	p.32	58016.....	p.54	58090.....	p.54
5421H.....	p.30	58017.....	p.54	58091.....	p.54
5421HLD.....	p.30	58018.....	p.54	58092.....	p.54
5421LED.....	p.32	58019.....	p.54	59000.....	p.58
5421SLD.....	p.30	58022.....	p.54	59010.....	p.58
5431LED.....	p.32	58023.....	p.54	59020.....	p.58
5510H.....	p.31	58024.....	p.54	59042.....	p.58
5510S.....	p.31	58025.....	p.54	59050.....	p.58
5510SL.....	p.31	58026.....	p.54	59080.....	p.58
5511H.....	p.31	58027.....	p.54	59100.....	p.58
5511S.....	p.31	58028.....	p.54	59120.....	p.58
5511SL.....	p.31	58029.....	p.54	59140.....	p.58
5521H.....	p.31	58030.....	p.54	59160.....	p.58
5550LED.....	p.31	58031.....	p.54	59180.....	p.58
5550LED.....	p.35	58032.....	p.54	59200.....	p.58
5552LED.....	p.35	58033.....	p.54	59220.....	p.58
5610H.....	p.33	58034.....	p.56	60.....	p.77
5610S.....	p.33	58035.....	p.56	61.....	p.77
5610SL.....	p.33	58036.....	p.56	62.....	p.77
5611H.....	p.33	58037.....	p.56	63-000.....	p.77
5611S.....	p.33	58038.....	p.56	63-642.....	p.78
5611SL.....	p.33	58039.....	p.56	63-643.....	p.78
56910.....	p.59	58040.....	p.56	67265.....	p.61
56912.....	p.59	58041.....	p.56	67266.....	p.61
56914.....	p.59	58042.....	p.56	67270.....	p.61
56916.....	p.59	58043.....	p.56	67273.....	p.61
56918.....	p.59	58044.....	p.56	67274.....	p.61
56920.....	p.59	58045.....	p.56	67275.....	p.61
56922.....	p.59	58046.....	p.56	67276.....	p.61
56924.....	p.59	58047.....	p.56	67279.....	p.61
56926.....	p.59	58050.....	p.56	67281.....	p.61
56928.....	p.59	58051.....	p.56	67286.....	p.61
56930.....	p.59	58055.....	p.56	67269.....	p.61
56932.....	p.59	58056.....	p.56	68000.....	p.63



Proudly
Canadian

PRODUCT INDEX

68010.....	p.63	8110.....	p.69	91735	p.75
705RR	p.72	8130.....	p.69	91736	p.75
735FI.....	p.70	81301	p.69	91741	p.75
735S.....	p.70	81303	p.69	91750	p.75
747	p.71	8131.....	p.69	920-18.....	p.80
747LED.....	p.71	8300H	p.36	920-35.....	p.45
75001.....	p.2	8300S	p.36	920-35C.....	p.45
75002.....	p.2	8300SL.....	p.36	920-35C5	p.45
75003.....	p.2	83201	p.76	920-35CTB.....	p.45
75005.....	p.2	83227	p.76	920-35CVLP	p.45
75006.....	p.3	83720	p.76	920-35D	p.45
75007.....	p.3	8400H	p.36	920-35EX.....	p.45
75008.....	p.3	8400S	p.36	920-35F.....	p.45
75009.....	p.3	8401H	p.36	920-35F4.....	p.45
75010.....	p.3	8401S	p.36	920-35FT	p.45
75016.....	p.2	8402HSL.....	p.36	920-35GM.....	p.45
766150	p.78	84101	p.76	920-35GM2	p.45
766152	p.78	8410S	p.76	920-35I.....	p.45
766153	p.78	8420H	p.36	920-35I6.....	p.45
766154	p.78	8420HLD.....	p.37	920-35INT.....	p.45
766155	p.78	8420SL.....	p.37	920-35IZ920-35	p.45
766161	p.78	8421H	p.37	920-35M1	p.45
766163	p.78	8421HLD.....	p.37	920-35RM2.....	p.45
77200.....	p.49	8421HSL.....	p.37	920-35RM5.....	p.45
77201.....	p.49	8421SL.....	p.37	920-35-S105	p.45
77202.....	p.49	8510H	p.38	92201	p.75
77203.....	p.49	8510S	p.38	92205	p.75
77204.....	p.49	8510SL.....	p.38	92301	p.75
77206.....	p.51	8511H	p.38	92305	p.75
77207.....	p.51	8511S	p.38	92405	p.75
77208.....	p.51	8511SL.....	p.38	92415	p.75
77209.....	p.51	8521H	p.38	92731	p.75
77210.....	p.51	8610H	p.39	9304H	p.40
7900.....	p.68	8610S	p.39	9304S	p.40
7900-T.....	p.69	8610SL.....	p.39	9400H	p.40
7901.....	p.68	8611H	p.39	9400HS	p.40
7921.....	p.69	8611S	p.39	9400S	p.40
7951.....	p.68	8611SL.....	p.39	9404H	p.40
80000.....	p.63	877	p.72	9404S	p.40
80001.....	p.63	88201	p.76	9408H	p.40
80030.....	p.62	88720	p.76	94104	p.74
80031.....	p.62	88741	p.76	9410S	p.74
80034.....	p.62	88874	p.76	9411H	p.41
80035.....	p.62	90103	p.76	9411S	p.41
80038.....	p.62	91410	p.75	9420H	p.43
80039.....	p.62	91415	p.75	9420HS	p.43
80044.....	p.62	91420	p.75	9422H	p.43
80045.....	p.62	91430	p.75	9424H	p.43
81007.....	p.69	91705	p.75	9500H	p.41



Proudly
Canadian

9500S.....	p.41	DL15-SMTK.....	p.65
9511H.....	p.42	DL35-12.....	p.67
9512H.....	p.42	DL35-12-1.....	p.67
9512HS.....	p.42	DL35-6.....	p.67
9512S.....	p.42	DL35-6-1.....	p.67
9523H.....	p.43	DLX3.....	p.64
9523S.....	p.43	LCS600.....	p.48
9530S.....	p.42	LDHEF-4-A.....	p.74
96000.....	p.80	LDHEF-4-B.....	p.74
98000.....	p.87	LDHEF-4-C.....	p.74
98001.....	p.87	LDHEF-4-R.....	p.74
98002.....	p.87	LDHEF-6-A.....	p.74
98003.....	p.87	LDHEF-6-B.....	p.74
98004.....	p.87	LDHEF-6-C.....	p.74
98005.....	p.87	LDHEF-6-R.....	p.74
98006.....	p.87	LST129-4.....	p.81
98-00660.....	p.71	LST129-7.....	p.81
98007.....	p.87	RP242W.....	p.63
98008.....	p.87	RP996.....	p.63
98009.....	p.87	SB1515.....	p.78
98010.....	p.87	SB3015.....	p.78
98011.....	p.87	SB4020.....	p.78
98012.....	p.87	SB4020T.....	p.78
98013.....	p.87	SB4425T.....	p.78
98014.....	p.87	ST3901-12.....	p.81
98015.....	p.87	ST413PColour.....	p.81
98016.....	p.87	ST413PColour-W.....	p.81
98017.....	p.87	ST415PC.....	p.81
98018.....	p.87	ST415PC-W.....	p.81
98020.....	p.87	ULB9.....	p.64
98400.....	p.76	VL22.....	p.66
98401.....	p.76		
98601.....	p.76		
99901.....	p.77		
D-10.....	p.48		
D-40.....	p.48		
D-60.....	p.48		
DL15-12.....	p.65		
DL15-12W.....	p.65		
DL15-6.....	p.65		
DL15-6GMB.....	p.66		
DL15-6MMB.....	p.66		
DL15-6W-1K.....	p.65		
DL15-BKT.....	p.65		
DL15-CUP.....	p.65		
DL15-CUPK.....	p.65		

NOTES



Proudly
Canadian

NOTES

