



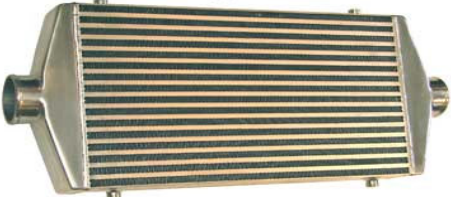
### UNIVERSAL INTERCOOLERS

IceVex™ performance intercoolers are designed with the best materials and technology available, adhering to stringent quality standards.

IceVex™ intercoolers are designed with bar & plate core technology. They offer negligible resistance to air flow resulting in minimal pressure drop even at very high flow rates




IceVex™ intercoolers are engineered for optimal heat transfer efficiency. They cool the pressurized air, increasing its density and allowing you to gain precious horsepower.

**More air mass = More horsepower!! ... You will achieve that with the IceVex™ intercooler.**

	<i>Model</i>	<i>Part #</i>	<i>Specification</i>	<i>Application</i>
 <p><b>IC30-C</b></p> <p><i>IceVex</i> www.icevex.com</p>	IC30-C	ICEIC30C	High flow rate: 1000 CFM (@ pressure drop of 2.8 psi) Pressure drop: 0.46 psi at 418 CFM Pressure drop: 0.98 psi at 600 CFM Operational pressure: 0 to 55 psig (0 to 3.7 bar) Peak pressure: 74 psig (5 bar) Overall size: · Length: 25 inches (63 cm) · Height: 12 inches (30 cm) · Width: 3 inches (7.6 cm) Core Size: · Length: 18 inches (45 cm) · Height: 12 inches (30 cm) · Width: 3 inches (7.6 cm) Inlet and outlet: 3 inch diameter (76 mm)	UNIVERSAL  ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO
 <p><b>IC30-C2</b></p> <p><i>IceVex</i> www.icevex.com</p>	IC30-C2	ICEIC30C2	High flow rate: 1000 CFM (@ pressure drop of 2.8 psi) Pressure drop: 0.46 psi at 418 CFM Pressure drop: 0.98 psi at 600 CFM Operational pressure: 0 to 55 psig (0 to 3.7 bar) Peak pressure: 74 psig (5 bar) Overall size: · Length: 25 inches (63 cm) · Height: 12 inches (30 cm) · Width: 3 inches (7.6 cm) Core Size: · Length: 18 inches (45 cm) · Height: 12 inches (30 cm) · Width: 3 inches (7.6 cm) Inlet and outlet: 3 inch diameter (76 mm)	UNIVERSAL  ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO
 <p><b>IC30-D2</b></p> <p><i>IceVex</i> www.icevex.com</p>	IC30-D2	ICEIC30D2	High flow rate: 990 CFM (@ pressure drop of 2.9 psi) Pressure drop: 0.49 psi at 411 CFM Pressure drop: 1.09 psi at 600 CFM Operational pressure: 0 to 55 psig (0 to 3.7 bar) Peak pressure: 74 psig (5 bar) Overall size: · Length: 28 inches (63 cm) · Height: 12 inches (30 cm) · Width: 3 inches (7.6 cm) Core Size: · Length: 21 inches (45 cm) · Height: 12 inches (30 cm) · Width: 3 inches (7.6 cm) Inlet and outlet: 3 inch diameter (76 mm)	UNIVERSAL  ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO


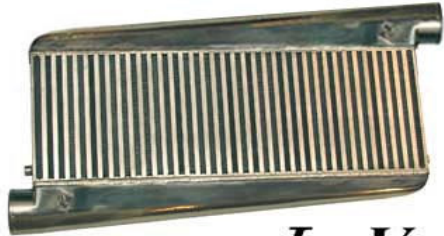

# IceVex

Product Catalog - April 2008

	<i>Model</i>	<i>Part #</i>	<i>Specification</i>	<i>Application</i>
<p><b>IC30-F</b></p>  <p><i>IceVex</i> www.icevex.com</p>	<b>IC30-F</b>	<b>ICEIC30F</b>	<p>High flow rate: 950 CFM (@ pressure drop of 2.9 psi)            Pressure drop: 0.58 psi at 410 CFM            Pressure drop: 1.29 psi at 620 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:            · Length: 31 inches (78 cm)            · Height: 12 inches (30 cm)            · Width: 3 inches (7.6 cm)            Core Size:            · Length: 24 inches (60 cm)            · Height: 12 inches (30 cm)            · Width: 3 inches (7.6 cm)            Inlet and outlet: 3 inch diameter (76 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>
<p><b>IC35-BB</b></p>  <p><i>IceVex</i> www.icevex.com</p>	<b>IC35-BB</b>	<b>ICEIC35BB</b>	<p>High flow rate: 700 CFM (@ pressure drop of 2.8 psi)            Pressure drop: 0.5 psi at 300 CFM            Pressure drop: 1.05 psi at 426 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:            · Length: 28 inches (71 cm)            · Height: 6.5 inches (17 cm)            · Width: 3.5 inches (8.9 cm)            Core Size:            · Length: 21 inches (53 cm)            · Height: 6.5 inches (17 cm)            · Width: 3.5 inches (8.9 cm)            Inlet and outlet: 2.5 inch diameter (64 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>
<p><b>IC35-1909X</b></p>  <p><i>IceVex</i> www.icevex.com</p>	<b>IC35-1909X</b>	<b>ICEIC351909X</b>	<p>High flow rate: 970 CFM (@ pressure drop of 2.9 psi)            Pressure drop: 0.54 psi at 406 CFM            Pressure drop: 1.20 psi at 620 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:            · Length: 26 inches (66 cm)            · Height: 12.5 inches (32 cm)            · Width: 3.5 inches (8.9 cm)            Core Size:            · Length: 19 inches (48 cm)            · Height: 9.3 inches (23.5 cm)            · Width: 3.5 inches (8.9 cm)            Inlet: 2.5 inch diameter (64 mm)            Outlet: 3.0 inch diameter (76 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>


# IceVex

Product Catalog - April 2008

	<i>Model</i>	<i>Part #</i>	<i>Specification</i>	<i>Application</i>
<p><b>IC35VA-P</b></p>  <p><i>IceVex</i> www.icevex.com</p>	<b>IC35VA-P</b>	<b>ICEIC35VAP</b>	<p>High flow rate: 1500 CFM (@ pressure drop of 2.7 psi)            Pressure drop: 0.46 psi at 640 CFM            Pressure drop: 0.96 psi at 920 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:            · Length: 26.0 inches (66 cm)            · Height: 11.5 to 15 inches (29 to 38 cm)            · Width: 3.5 inches (8.9 cm)            Core Size:            · Length: 24.3 inches (62 cm)            · Height: 9 inches (23 cm)            · Width: 3.5 inches (8.9 cm)            Inlet: 3.0 inch diameter (76 mm)            Outlet: 3.0 inch diameter (76 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>
<p><b>IC35VB-P</b></p>  <p><i>IceVex</i> www.icevex.com</p>	<b>IC35VB-P</b>	<b>ICEIC35VBP</b>	<p>High flow rate: 1500 CFM (@ pressure drop of 2.7 psi)            Pressure drop: 0.46 psi at 640 CFM            Pressure drop: 0.96 psi at 920 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:            · Length: 28 inches (71 cm)            · Height: 14 inches irregular (36 cm)            · Width: 3.5 inches (8.9 cm)            Core Size:            · Length: 24.3 inches (62 cm)            · Height: 9 inches (23 cm)            · Width: 3.5 inches (8.9 cm)            Inlet: 3.0 inch diameter (76 mm)            Outlet: 3.0 inch diameter (76 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>
<p><b>IC35V2-P</b></p>  <p><i>IceVex</i> www.icevex.com</p>	<b>IC35V2-P</b>	<b>ICEIC35V2P</b>	<p>High flow rate: 1500 CFM (@ pressure drop of 2.7 psi)            Pressure drop: 0.46 psi at 640 CFM            Pressure drop: 0.96 psi at 920 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:            · Length: 31.5 inches (80 cm)            · Height: 14 inches (36 cm)            · Width: 3.5 inches (8.9 cm)            Core Size:            · Length: 24.3 inches (62 cm)            · Height: 9 inches (23 cm)            · Width: 3.5 inches (8.9 cm)            2 Inlets: 2.5 inch diameter each (64 mm)            Outlet: 3.0 inch diameter (76 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>

# IceVex

Product Catalog - April 2008

	<i>Model</i>	<i>Part #</i>	<i>Specification</i>	<i>Application</i>
<p><b>IC40-M</b></p>  <p><i>IceVex</i> www.icevex.com</p>	IC40-M	ICEIC40M	<p>High flow rate: 1200 CFM (@ pressure drop of 2.8 psi)            Pressure drop: 0.73 psi at 600 CFM            Pressure drop: 1.65 psi at 910 CFM            Operational pressure: 0 to 55 psig (0 to 3.7 bar)            Peak pressure: 74 psig (5 bar)            Overall size:</p> <ul style="list-style-type: none"> <li>· Length: 31 inches (78 cm)</li> <li>· Height: 12 inches (30 cm)</li> <li>· Width: 4 inches (10 cm)</li> </ul> <p>Core Size:</p> <ul style="list-style-type: none"> <li>· Length: 24 inches (60 cm)</li> <li>· Height: 12 inches (30 cm)</li> <li>· Width: 4 inches (10 cm)</li> </ul> <p>Inlet and outlet: 3 inch diameter (76 mm)</p>	<p>UNIVERSAL</p> <p>ACURA, AUDI, BMW, BUICK, CADILLAC, CHEVROLET, CHRYSLER, DAEWOO, DODGE, EAGLE, FORD, FERRARI, GEO, GMC, HONDA, HUMMER, HYUNDAI, INFINITI, ISUZU, JAGUAR, JEEP, KIA, LAND ROVER, LAMBORGHINI, LEXUS, LINCOLN, MAZDA, MERCEDES, MERCURY, MITSUBISHI, NISSAN, OLDSMOBILE, PLYMOUTH, PONTIAC, PORSCHE, SATURN, SCION, SMART, SUBARU, SUZUKI, TOYOTA, VOLKSWAGEN, VOLVO</p>

## SILICONE HOSES



*IceVex*  
www.icevex.com

## SILICONE COUPLERS - 4 Ply - 3 inch (76 mm) length



*IceVex*  
www.icevex.com

Model	Part #	Description
CP3-20K	ICECP320K	2.0" (51 mm) Coupler - Black
CP3-22K	ICECP322K	2.25" (57 mm) Coupler - Black
CP3-25K	ICECP325K	2.5" (64 mm) Coupler - Black
CP3-30K	ICECP330K	3.0" (76 mm) Coupler - Black
CP3-20U	ICECP320U	2.0" (51 mm) Coupler - Blue
CP3-22U	ICECP322U	2.25" (57 mm) Coupler - Blue
CP3-25U	ICECP325U	2.5" (64 mm) Coupler - Blue
CP3-30U	ICECP330U	3.0" (76 mm) Coupler - Blue
CP3-20R	ICECP320R	2.0" (51 mm) Coupler - Red
CP3-22R	ICECP322R	2.25" (57 mm) Coupler - Red
CP3-25R	ICECP325R	2.5" (64 mm) Coupler - Red
CP3-30R	ICECP330R	3.0" (76 mm) Coupler - Red

## SILICONE REDUCERS - 4 Ply - 3 inch (76 mm) length



*IceVex*  
www.icevex.com

Model	Part #	Description
RD3-2025K	ICERD32025K	2.0" - 2.5" (51 - 64 mm) Reducer - Black
RD3-2530K	ICERD32530K	2.5" - 3.0" (64 - 76 mm) Reducer - Black
RD3-2025U	ICERD32025U	2.0" - 2.5" (51 - 64 mm) Reducer - Blue
RD3-2530U	ICERD32530U	2.5" - 3.0" (64 - 76 mm) Reducer - Blue
RD3-2025R	ICERD32025R	2.0" - 2.5" (51 - 64 mm) Reducer - Red
RD3-2530R	ICERD32530R	2.5" - 3.0" (64 - 76 mm) Reducer - Red

**SILICONE 45 DEGREE ELBOWS - 4 Ply - 10 inch (254 mm) length end-to-end**



**IceVex**  
www.icevex.com

<i>Model</i>	<i>Part #</i>	<i>Description</i>
E4A-20K	ICEE4A20K	2.0" (51 mm) 45 Deg. Elbow - Black
E4A-25K	ICEE4A25K	2.5" (64 mm) 45 Deg. Elbow - Black
E4A-30K	ICEE4A30K	3.0" (76 mm) 45 Deg. Elbow - Black
E4A-20U	ICEE4A20U	2.0" (51 mm) 45 Deg. Elbow - Blue
E4A-25U	ICEE4A25U	2.5" (64 mm) 45 Deg. Elbow - Blue
E4A-30U	ICEE4A30U	3.0" (76 mm) 45 Deg. Elbow - Blue
E4A-20R	ICEE4A20R	2.0" (51 mm) 45 Deg. Elbow - Red
E4A-25R	ICEE4A25R	2.5" (64 mm) 45 Deg. Elbow - Red
E4A-30R	ICEE4A30R	3.0" (76 mm) 45 Deg. Elbow - Red

**SILICONE 90 DEGREE ELBOWS - 4 Ply - 10 inch (254 mm) length end-to-end**



**IceVex**  
www.icevex.com

<i>Model</i>	<i>Part #</i>	<i>Description</i>
E9A-20K	ICEE9A20K	2.0" (51 mm) 90 Deg. Elbow - Black
E9A-25K	ICEE9A25K	2.5" (64 mm) 90 Deg. Elbow - Black
E9A-30K	ICEE9A30K	3.0" (76 mm) 90 Deg. Elbow - Black
E9A-20U	ICEE9A20U	2.0" (51 mm) 90 Deg. Elbow - Blue
E9A-25U	ICEE9A25U	2.5" (64 mm) 90 Deg. Elbow - Blue
E9A-30U	ICEE9A30U	3.0" (76 mm) 90 Deg. Elbow - Blue
E9A-20R	ICEE9A20R	2.0" (51 mm) 90 Deg. Elbow - Red
E9A-25R	ICEE9A25R	2.5" (64 mm) 90 Deg. Elbow - Red
E9A-30R	ICEE9A30R	3.0" (76 mm) 90 Deg. Elbow - Red

**Stainless Steel T-Bolt Clamps**



**IceVex**  
www.icevex.com

<i>Model</i>	<i>Part #</i>	<i>Description</i>
CL-200	ICECL200	T-Bolt Clamp for 2.0" (51 mm) piping Range 54-62 mm
CL-225	ICECL225	T-Bolt Clamp for 2.25" (57 mm) piping Range 60-68 mm
CL-250	ICECL250	T-Bolt Clamp for 2.5" (64 mm) piping Range 67-75 mm
CL-275	ICECL275	T-Bolt Clamp for 2.75" (70 mm) piping Range 73-81 mm
CL-300	ICECL300	T-Bolt Clamp for 3.0" (76 mm) piping Range 79-87mm