

EARTH,
WIND,
WATER,
FIRE...



PRECISION
performance



HIGH PERFORMANCE
FLUID TRANSFER PRODUCTS
AND SYSTEM COMPONENTS

PRECISIONPERFORMANCEINC.COM



Welcome!

Precision Performance is a U.S. based manufacturer of automotive and motorcycle products sold to the wholesale and retail aftermarkets in four continents. We currently supply over 3,800 different products / stocking units under the industry's most recognizable names.

Since 1990 we have designed, engineered and manufactured fluid control products for the automotive, motorcycle and hydraulic industries. Our equipment listing includes CNC mills, lathes and machining centers, multi-spindle turning machines, CNC tube bending, automated assembly equipment and specialized machines tailored to the products we offer to our customers. Under ISO-9000 standards our manufacturing capabilities include the multi-shift operation of 78 pieces of equipment each day.

Each product offered by Precision has been designed by in-house engineers. Their primary intent is to construct products that provide a functional ease-of use for our customers, as well as minimize the overall cost of production. This is demonstrated in our one-piece tube hose end products. In this example, our customer will have a product that can swivel on both ends and be assured the product will not leak due to brazing flaws. Internally our production process has eliminated one part to the assembly, as well as the brazing operation. This priority system established by our engineers has allowed us to be a competitive U.S. based manufacturer.

Precision's hose products has been engineered and tested through independent ASTM laboratories to meet all SAE-30R7 standards. During its development the intent was to make our stainless braided hose products easier for assembly by the end user, plus limit or eliminate the wire frays and spreads which occur after cutting. This was done by cutting 50% of the available manufacturing tolerances currently used by the major hose producers in our market. This provides our customer with a product that is dimensionally consistent and easier to assemble with re-usable fittings. We enhanced the curing process of the hose which uniformly applies the glue and adhesion of glue between the stainless braid and the CPE inner core. This has dramatically reduced the frays and spreads associated with cut stainless braided hose products.

Precision Performance supplies the automotive and motorcycle aftermarket with products sold under private label branding. Each of our private label customers have their own their own systems and needs. This in turn has given us the ability to offer our customers customized packaging, bar coding, point of purchase displays, product and logo etching, customer designed products, as well as our catalog and product advertisements customized to their needs.

From all of us at Precision Performance please accept our appreciation for two decades of continuous support.

Flex-Loc™ is a registered trademark of HBD/Thermoid®, Inc.

Holley® is a registered trademark of Holley Corporation

Demon™ is a registered trademark of Barry Grant, Inc.

Teflon® and Viton® are registered trademarks of Dupont Corporation.

Street Legal™ is a trademark of Titeflex Corp.

Any and all other brandnames, trademarks, or registered trademarks are the property of their respective owners.



Terms and Conditions of Sale

PRICING: All prices are stated in U.S. dollars and are subject to change without notice. Discounts and special pricing programs are offered at the sole discretion of Precision Performance, Inc. Prices are suggested prices only and procession of our price lists does not guarantee the right to purchase parts at those prices.

METHOD OF PAYMENT: Open account status may be granted to those domestic accounts that meet Precision Performance, Inc. credit requirements. Payment terms are NET 30 from the date of invoice. We also accept MasterCard, Visa and American Express for method of payment.

PACKAGING: All products are available to ship in bulk, clamshell or poly bags with the appropriate bar coded information. Customers must designate their preference for packaging.

FREIGHT POLICY: Orders are shipped F.O.B. from our factory in St. Petersburg, FL. Freight will be prepaid on those orders shipped to a single location valued at or greater than \$1500 U. S. dollars. Those orders not qualifying for prepaid shipping will ship via UPS freight collect unless otherwise requested by customer.

DROP-SHIPMENTS: Precision Performance, Inc. will drop ship to a destination other than the customer's address for an additional \$10.00 per drop ship location.

RETURNS: ALL SALES ARE FINAL. Returns will be accepted only by those authorized by Precision Performance, Inc. All returns must include the return authorization number given by authorized personnel at Precision Performance. If product is accepted as a return, replacement part(s) or house credit will be issued. Under no circumstance will cash or credit card refunds be dispersed.

LIMITED WARRANTY: Precision Performance warrants that said products will be free from defects in material and workmanship for 1 year from the date of original purchase, and this warranty is limited to repair or replacement of parts. This warranty shall not exceed the original purchase price of the goods, nor shall Precision Performance be responsible for special, incidental, or consequential damages. Any defective parts should be returned to Dealer where purchased. This warranty does not apply to any products subject to damage in transit, accident or misuse or abuse following the date of original purchase. Products in this catalog are for Off-road use only. Application for use of product is for automotive, motorcycle, and competition marine use only.

Index

Power-Flo™ Double Braided Stainless Steel Racing Hose	4
Power-Lite™ Hose.....	5
Flex-Lok™ Push-On Hose	6
Pre-Assembled Hose Assemblies.....	7
Hydra-Flex™ Stainless Braided Teflon™ Brake Line, Gas Shocks and Power Steering Hose	8
Street Legal™ Universal Brake Line.....	9
Brake Adapter Fittings	10
Fuel Accessories	11
Blue Nitrous Hoses	12
Red Fuel Lines.....	12
Nitrous Male Y-Fitting	13
Nitrous Distribution Block	13
Nitrous Adapters.....	13
Fuel Distribution Y Blocks & Fittings.....	14
One-Way Check Valves.....	15
Carbureted Style Fuel Pressure Regulator	16
Adjustable EFI By-Pass Fuel Pressure Regulator	17
Pure-Flow® In-Line Race Fuel Filters.....	18
In-Line Compact Fuel Filters.....	18
NEW! Pure-Flow® In-Line Pro Race Fuel Filters	19
Dual Inlet Carburetor Line Kits	20
Economy Style Dual Inlet Carb Kits.....	21
Carburetor Banjo Adapter Fittings	21
Carburetor Inlet Adapters.....	22
Fuel Rail Fittings.....	22
AN Adapter Fittings	23
Female to Male Expanders.....	24
Male to Female Reducers.....	24
Forged Adapter Fittings.....	25
Special Adapter Fittings	26
Miscellaneous AN Adapter Fittings	27
Dry Sump/Engine Fittings	28
Size Reference Charts.....	29
Precision Test Kits.....	30
Gauge Supply Line Kits	30
Metric Hose Ends (Used with AN Hose)	31
Point of Purchase Displays.....	32/33
Private Labeled Program	34
SPECIAL MOTORCYCLE SECTION	
Brake Line Components	36
Oil & Fuel Lines	37
New! Metric Universal Brake Line Components.....	37
Brake Line Kits	38

PRECISION performance

Power-Flo™ Double Braided Stainless Steel Racing Hose

Precision's hose products has been engineered and tested through independent ASTM laboratories to meet all SAE-30R7 standards. During its development the intent was to make our stainless braided hose products easier for assembly by the end user, plus limit or eliminate the wire frays and spreads which occur after cutting. This was done by cutting 50% of the available manufacturing tolerances currently used by the major hose producers in our market. This provides our customer with a product that is dimensionally consistent and easier to assemble with re-usable fittings. We enhanced the curing process of the hose which uniformly applies the glue and adhesion of glue between the stainless braid and the CPE inner core. This has dramatically reduced the frays and spreads associated with cut stainless braided hose products. Operating temperatures are from -40° F to +350° F and deliver hydrocarbon and alcohol based fuels, motor oils and coolant.

AN Size	Inside Dia.	Outside Dia.	Max PSI	Min Bend	Bulk Length	3' Length	6' Length	10' Length	15' Length	20' Length
-4	0.22	0.44	1500	2" R.	320499	320403	320406	320410	320415	320420
-6	0.34	0.55	1500	2.5" R.	320699	320603	320606	320610	320615	320620
-8	0.43	0.64	1500	3.5 R.	320899	320803	320806	320810	320815	320820
-10	0.56	0.79	1250	4" R.	321099	321003	321006	321010	321015	321020
-12	0.69	0.94	1000	4.5" R.	321299	321203	321206	321210	321215	321220
-16	0.88	1.16	750	5.5" R.	321699	321603	321606	321610	321615	321620

Power-Flo™ Swivel Hose Ends

Constructed from lightweight 6061 alloy aluminum and designed for smooth flow, easy assembly and longer life. All elbow ends are built from One-Piece billet tube construction- avoiding leakable braze joints. Viton® O-Ring seal allows 360 degree rotation. 37 AN flare assures leakproof sealing surface eliminating need for taping. Compatible with all AN adapter fittings. Available in Red/Blue Brite Dip Anodized finish or Brite Electro-less Nickel plating.

Power-Flo™ Full Swivel AN Reusable Hose Ends Use

37 flare seal (JIC/AN) compatible to other manufacturers product. Use with Power-Flo™ stainless braided racing hose.



Straight Swivel



45 Degree Elbow



90 Degree Elbow

AN Size	Anodize	Electro+ Part No.	AN Size	Anodize	Electro+ Part No.	AN Size	Anodize	Electro+ Part No.
-4	10400	10400E	-4	10445	10445E	-4	10490	10490E
-6	10600	10600E	-6	10645	10645E	-6	10690	10690E
-8	10800	10800E	-8	10845	10845E	-8	10890	10890E
-10	11000	11000E	-10	11045	11045E	-10	11090	11090E
-12	11200	11200E	-12	11245	11245E	-12	11290	11290E
-16	11600	11600E	-16	11645	11645E	-16	11690	11690E

Power-Flo™ Full Swivel Reusable Pipe Hose Ends

Adapts Braided Hose to NPTF ports directly and easily without needing an adapter. High strength one piece billet tube with Swivel construction allows for a clean connection. Use with Power-Flo™ Racing Hose.



Straight Swivel



45 Degree Elbow



90 Degree Elbow

AN Size	NPTF Thread	Anodize	Electro+ Part No.	AN Size	NPTF Thread	Anodize	Electro+ Part No.	AN Size	NPTF Thread	Anodize	Electro+ Part No.
-6	1/4 NPTF	12600	12600E	-6	1/4 NPTF	12645	12645E	-6	1/4 NPTF	12690	12690E
-8	3/8 NPTF	12800	12800E	-8	3/8 NPTF	12845	12845E	-8	3/8 NPTF	12890	12890E
-8	1/2 NPTF	12801	12801E	-8	1/2 NPTF	12846	12846E	-8	1/2 NPTF	12891	12891E
-10	1/2 NPTF	12000	12000E	-10	1/2 NPTF	12045	12045E	-10	1/2 NPTF	12090	12090E
-12	1/2 NPTF	12200	12200E	-12	1/2 NPTF	12245	12245E	-12	1/2 NPTF	12290	12290E
-12	3/4 NPTF	12201	12201E	-12	3/4 NPTF	12246	12246E	-12	3/4 NPTF	12291	12291E



Power-Lite™ Hose

A lightweight alternative to stainless braided hose, Power-Lite™ hose is constructed of a high grade nitrile inner core (which reduces fuel permeation) and black nylon fiber braid. No cuts or scrapes when assembling with our Power-Flo™ hose ends.

For the perfect match Power-Flo™ hose ends and adapters are now available in Black Anodize and Electro+ Finishes.



- **Weight Savings can be up to 40% of Stainless Braided Hose**

- Maximum Pressure Rating of 350 psi on all sizes
- Operating temperatures are from -40°F to 302°F
- Can be used with fuel(including diesel), lubricating oils and antifreeze

- Not recommended for use in vacuum applications without using an inner spring support

AN Size	Inside Dia.	Outside Dia.	Min. Bend	Bulk Length	3' Length	6' Length	10' Length	15' Length	20' Length
-4	0.22	0.44	2" R.	350499	350403	350406	350410	350415	350420
-6	0.34	0.55	2.25" R.	350699	350603	350606	350610	350615	350620
-8	0.43	0.64	3.5" R.	350899	350803	350806	350810	350815	350820
-10	0.56	0.79	4" R.	351099	351003	351006	351010	351015	351020
-12	0.69	0.94	4.5" R.	351299	351203	351206	351210	351215	351220
-16	0.88	1.16	5.5" R.	351699	351603	351606	351610	351615	351620

Power-Flo™ Swivel Hose Ends

Black Swivel Hose Ends



AN Size	Straight	AN Size	45 Degree	AN Size	90 Degree
-4	10400-BLK	-4	10445-BLK	-4	10490-BLK
-6	10600-BLK	-6	10645-BLK	-6	10690-BLK
-8	10800-BLK	-8	10845-BLK	-8	10890-BLK
-10	11000-BLK	-10	11045-BLK	-10	11090-BLK
-12	11200-BLK	-12	11245-BLK	-12	11290-BLK
-16	11600-BLK	-16	11645-BLK	-16	11690-BLK

*Remaining items in catalog can be ordered in Black by listing "-BLK" after anodized Part #. For instance, 60624-BLK for a -6AN Black Flare Tee.



PRECISION performance

Flex-Lok™ Push-On Hose

Designed for reduced weight and increased flexibility, Flex-Lok™ Push-On Hose features a Class A high oil resistant nitrile inner tube with a reinforcing two spiral aramid fiber and a nitrile/PVC cover resistant to oil and petroleum based products. Flex-Lok™ Push-On Hose is compatible with a wide range of oils and fuels, however is NOT recommended for use with unleaded gasoline. DO NOT USE with brake fluids or power steering fluids. Operates at 250 PSI and temperature range -30° F to +160° F. Use with Push-On Swivel Hose Ends and all 37° AN flare adapters.



AN Size	Hose I.D.	Hose O.D.	Max PSI	Min Bend	Bulk Length	10' Length	15' Length	20' Length	50' Length
-4	1/4"	15/32"	250	2.5 R	330499	330410	330415	330420	330450
-6	3/8"	5/8"	250	3 R	330699	330610	330615	330620	330650
-8	1/2"	3/4"	250	5 R	330899	330810	330815	330820	330850
-10	5/8"	15/16"	250	6 R	331099	331010	331015	331020	331050
-12	3/4"	1-1/32"	200	7R	331299	331210	331215	331220	331250

-4 through -12 Flex-Lok™ Push-On Hose available in black, just add -BLK after part number. Example: 330410-BLK

Push-On Full Swivel Hose Ends

Avoid twisting and kinking your lines at installation with these Full-Swivel non-stress Push-On Hose Ends. Lightweight and economical, Push-On fittings assemble fast for the trouble free performance you need. Use with any 37° AN Flare Adapter. Use only with Flex-Lok™ Push-On Hose.

Fittings now available in black, just add -BLK after Part Number.



Straight Swivel



45 Degree Elbow



90 Degree Elbow

AN Size	Anodize	Electro+ Part No.	AN Size	Anodize	Electro+ Part No.	AN Size	Anodize	Electro+ Part No.
-4	20400	20400E	-4	20445	20445E	-4	20490	20490E
-6	20600	20600E	-6	20645	20645E	-6	20690	20690E
-8	20800	20800E	-8	20845	20845E	-8	20890	20890E
-10	21000	21000E	-10	21045	21045E	-10	21090	21090E
-12	21200	21200E	-12	21245	21245E	-12	21290	21290E

Push-On Adapters

Lightweight 6061 Aluminum Adapters allow the fullest advantage of a hose end, by eliminating the need and weight for additional adapters and connect directly to your application.

Fittings now available in black, just add -BLK after Part Number.



Straight Barb to Pipe Adapter



Straight Barb to Straight Flare Adapter



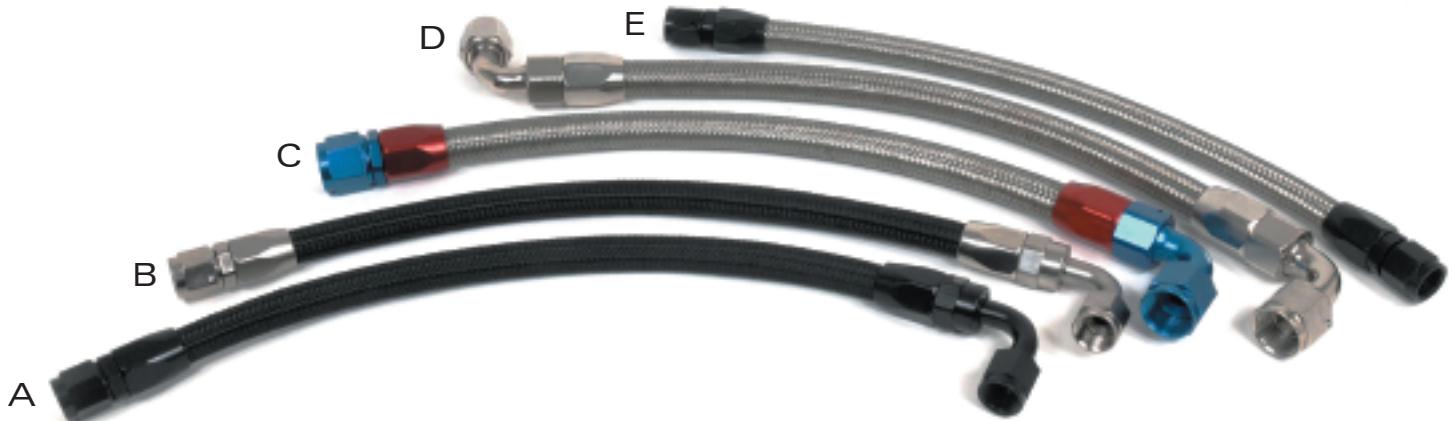
Flare to Flex-Lok™ Tee

AN Size	NPTF Size	Anodize	AN Size	Flex-Loc™	Electro+ Part No.	AN Size	Flex-Loc™	Anodize
-4	1/4	20438	-4	-4	20408	-6	-6	20624
-6	1/4	20638	-6	-6	20608	-8	-8	20824
-8	3/8	20838	-8	-8	20808			
-10	1/2	21038	-10	-10	21008			
-12	3/4	21238	-12	-12	21208			

Pre-Assembled Hose Assemblies

Pre-Assembled hose assemblies ready for quick installation. Save time and skin by having these hose assemblies on the shelf ready to go. Part numbers listed below are stock, however custom hose lengths and hose end configurations are available (For example: D, 90° hose end x 90° hose end). Please contact Precision Performance Sales Department for pricing and availability.

Additional charges applied to custom orders.



HOSE TYPE	FITTING COLOR	HOSE END	HOSE END	3' HOSE LENGTH	4' HOSE LENGTH	6' HOSE LENGTH	EXAMPLE SHOWN
Power-Flo™ Stainless Steel Braided Racing	Red/Blue	-6AN STRAIGHT	-6AN STRAIGHT	326003	326004	326006	
Power-Flo™ Stainless Steel Braided Racing	Red/Blue	-6AN STRAIGHT	-6AN X 45°	326053	326054	326056	
Power-Flo™ Stainless Steel Braided Racing	Red/Blue	-6AN STRAIGHT	-6AN X 90°	326093	326094	326096	
Power-Flo™ Stainless Steel Braided Racing	Black	-6AN STRAIGHT	-6AN STRAIGHT	326003B	326004B	326006B	E
Power-Flo™ Stainless Steel Braided Racing	Black	-6AN STRAIGHT	-6AN X 45°	326053B	326054B	326056B	
Power-Flo™ Stainless Steel Braided Racing	Black	-6AN STRAIGHT	-6AN X 90°	326093B	326094B	326096B	
Power-Lite™ Black Nylon Braided	Black	-6AN STRAIGHT	-6AN STRAIGHT	356003-BLK	356004-BLK	356006-BLK	
Power-Lite™ Black Nylon Braided	Black	-6AN STRAIGHT	-6AN X 45°	356053-BLK	356054-BLK	356056-BLK	
Power-Lite™ Black Nylon Braided	Black	-6AN STRAIGHT	-6AN X 90°	356093-BLK	356094-BLK	356096-BLK	A
Power-Flo™ Stainless Steel Braided Racing	Electro+	-6AN STRAIGHT	-6AN STRAIGHT	326003E	326004E	326006E	
Power-Flo™ Stainless Steel Braided Racing	Electro+	-6AN STRAIGHT	-6AN X 45°	326053E	326054E	326056E	
Power-Flo™ Stainless Steel Braided Racing	Electro+	-6AN STRAIGHT	-6AN X 90°	326093E	326094E	326096E	
Power-Lite™ Black Nylon Braided	Electro+	-6AN STRAIGHT	-6AN STRAIGHT	326003EB	326004EB	326006EB	
Power-Lite™ Black Nylon Braided	Electro+	-6AN STRAIGHT	-6AN X 45°	326053EB	326054EB	326056EB	
Power-Lite™ Black Nylon Braided	Electro+	-6AN STRAIGHT	-6AN X 90°	326093EB	326094EB	326096EB	B
Power-Flo™ Stainless Steel Braided Racing	Red/Blue	-8AN STRAIGHT	-8AN STRAIGHT	328003	328004	328006	
Power-Flo™ Stainless Steel Braided Racing	Red/Blue	-8AN STRAIGHT	-8AN X 45°	328053	328054	328056	
Power-Flo™ Stainless Steel Braided Racing	Red/Blue	-8AN STRAIGHT	-8AN X 90°	328093	328094	328096	C
Power-Flo™ Stainless Steel Braided Racing	Black	-8AN STRAIGHT	-8AN STRAIGHT	328003B	328004B	328006B	E
Power-Flo™ Stainless Steel Braided Racing	Black	-8AN STRAIGHT	-8AN X 45°	328053B	328054B	328056B	
Power-Flo™ Stainless Steel Braided Racing	Black	-8AN STRAIGHT	-8AN X 90°	328093B	328094B	328096B	
Power-Lite™ Black Nylon Braided Hose	Black	-8AN STRAIGHT	-8AN STRAIGHT	358003-BLK	358004-BLK	358006-BLK	
Power-Lite™ Black Nylon Braided Hose	Black	-8AN STRAIGHT	-8AN X 45°	358053-BLK	358054-BLK	358056-BLK	
Power-Lite™ Black Nylon Braided Hose	Black	-8AN STRAIGHT	-8AN X 90°	358093-BLK	358094-BLK	358096-BLK	A
Power-Flo™ Stainless Steel Braided Racing	Electro+	-8AN STRAIGHT	-8AN STRAIGHT	328003E	328004E	328006E	
Power-Flo™ Stainless Steel Braided Racing	Electro+	-8AN STRAIGHT	-8AN X 45°	328053E	328054E	328056E	
Power-Flo™ Stainless Steel Braided Racing	Electro+	-8AN STRAIGHT	-8AN X 90°	328093E	328094E	328096E	
Power-Lite™ Black Nylon Braided	Electro+	-8AN STRAIGHT	-8AN STRAIGHT	328003EB	328004EB	328006EB	
Power-Lite™ Black Nylon Braided	Electro+	-8AN STRAIGHT	-8AN X 45°	328053EB	328054EB	328056EB	
Power-Lite™ Black Nylon Braided	Electro+	-8AN STRAIGHT	-8AN X 90°	328093EB	328094EB	328096EB	B

PRECISION performance

Hydra-Flex™ Stainless Braided Teflon™ Brake Line, Gas Shocks and Power Steering Hose



Corrosion resistant Teflon™ Inner tube reinforced with a 308 stainless steel outer braid delivers dependable performance for brakelines and power steering. Hydra-flex™ smooth bore hose operates from -65° F to 450° F. Stainless steel braid protects critical fluids from heat, abrasion and line expansion to achieve superior performance.

AN Size	Race Applications	Inside Dia.	Outside Dia.	Max PSI	Bulk Length	3' Length	6' Length	10' Length
-3	Brakes	0.12	0.24	3000	340399	340303	340306	340310
-4	Brakes, Clutches, Gas Shocks	0.19	0.31	3000	340499	340403	340406	340410
-6	Power Steering	0.31	0.45	2500	340699	340603	340606	340610

Hydra-Flex™ Hose Ends

Used for Brake Lines, Shocks and Power Steering Hose Braided Line Assembly Available in -3, -4, -6 Hose sizes and End options. Choose from Straight, Elbowed or Banjo Ends to Complete the custom fit you need. Machined from high quality steel to handle any high pressure application. Zinc Plated for maximum corrosion resistance.



Straight 1/8" Male Hose End



Straight Hose End



45 Degree Hose End



90 Degree Hose End



Banjo Hose End
For use with
AN Teflon™ Hose Only



Assembled Components
Short Banjo Hose End



Connect -6 AN Hydra-Flex™ Power steering hose to one of these zinc plated steel Pump Adapters to assure reliable and consistent operation with high pressure steering systems.



Brass Replacement Sleeves
for Teflon™ Fittings
5 per package

AN Size	10MM (3/8") Hole Size	7/16" Hole Size
-3	40310	40312
-4	40410	40412

AN Size	10MM (3/8") Hole Size	7/16" Hole Size
-3	40313	40311

AN Size	Thread	Part No.
-6	1/2" - 20 Inverted Flare	440650
-6	5/8" - 18 Inverted Flare	440662
-6	11/16" - 18 Inverted Flare	440668

Part No.	Hose Fitting Dash Size
40399	-3
40499	-4
40699	-6

*Available in anodized Aluminum, see page 11.

NEW! Hydra-Flex™ Aluminum Hose Ends



Straight Hose End



45 Degree Hose End



90 Degree Hose End

AN SIZE	Blue Anodize	Black Anodize
-4	40400A	40400A-BLK
-6	40600A	40600A-BLK
-8	40800A	40800A-BLK

AN SIZE	Blue Anodize	Black Anodize
-4	40445A	40445A-BLK
-6	40645A	40645A-BLK
-8	40845A	40845A-BLK

AN SIZE	Blue Anodize	Black Anodize
-4	40490A	40490A-BLK
-6	40690A	40690A-BLK
-8	40890A	40890A-BLK



Street Legal™ Universal Brake Line

AN DOT conforming Street Legal™ Brake Lines will improve your 60 to 0 performance braking needs. Constructed from smooth bore Teflon® tube reinforced with a 308 stainless steel braided cover, allowing a firmer and faster brake pedal response. Available in 3 styles: Nut to Nut, Nut to 10MM (3/8") Banjo, Nut to 90° Tube Nut.



Completed Assemblies, ready for installation

Part No.*	AN Size	Assembly Description
4300--	-3	Straight -3AN Female Swivel Nut to Straight -3 AN Female Swivel Nut (See "A" in photo above)
4338--	-3	Straight -3AN Female Swivel Nut to 10MM (3/8") Banjo (See "B" in photo above)
4390--	-3	Straight -3AN Female Swivel to -3 90° Tube Nut Assembly
4400--	-4	Straight -4AN Female Swivel Nut to Straight -4 AN Female Swivel Nut
4438--	-4	Straight -4AN Female Swivel Nut to 10MM (3/8") Banjo
4490--	-4	Straight -4AN Female Swivel to -4 90° Tube Nut Assembly (See "C" in photo above)
4600--	-6	Straight -6AN Female Swivel Nut to Straight -6 AN Female Swivel Nut
4690--	-6	Straight -6AN Female Swivel to -6 90° Tube Nut Assembly (similar to -4)

*Standard lengths offered are 9" to 30". However, we will make custom lengths upon request. Therefore, to order Pre-assembled Teflon™ Hose Assemblies, use the prefixes listed above and complete the part number by adding your overall length.

Example: If you would like an assembly made from -3 Teflon™ with -3AN Swivel Nuts on each end with an overall length of 24", then order by using Part Number: 430024.

Stainless Steel Brake Line Kits



Part No.	Year	Make
436776	1969-76	Chevy Camaro/ Pontiac Firebird
437781	1977-81	Chevy Camaro/ Pontiac Firebird

Part No.	Year	Make
437986	1979-86	Ford Mustang
438793	1987-93	Ford Mustang

PRECISION performance

Brake Adapter Fittings



-3AN to 1/8" NPT

AN	Chrome	Zinc
-3	444000	444000E



-3AN x 45 Deg- 1/8" NPT

AN	Chrome	Zinc
-3	451245	451245E



-3AN x 90 Deg- 1/8" NPT

AN	Chrome	Zinc
-3	451290	451290E



-3AN Straight Banjo

Size	Thread	Chrome	Zinc
10mm	3/8-24	461000	461000E
12mm	3/8-24	461200	462000E



-3AN 35 Degree Banjo

Size	Thread	Chrome	Zinc
10mm	3/8-24	461035	461035E
12mm	3/8-24	461235	461235E



-3AN 90 Degree Banjo

Size	Thread	Chrome	Zinc
10mm	3/8-24	461090	461090E
12mm	3/8-24	461290	461290E



AN to I.F. Male Adapter

AN IF Thread	Chrome	Zinc	Qty/Card
-3 3/8"-24	444001	444001E	2
-3 7/16"-24	444002	444002E	2
-3 7/16"-20	444003	444003E	2
-4 3/8"-24	444004	444004E	2



AN Flare to I.F. Female/NPT

AN	Part No.	IF Thread	Qty/Card
-3	444005	3/8-24	2
-3	444007	7/16-24	2
-3	444013	1/8" NPT	2
-4	444014	1/8" NPT	2



AN Flare Short Banjo

AN Size	Hole Size Thread	Part No.
-3	10MM (3/8"-24)	461003
-3	12MM (7/16"-24)	461203
-4	10MM (3/8"-24)	461004
-4	12MM (7/16"-24)	461204



-3AN Male Union

AN	Part No.	Qty/Card
-3	444315	1



1/8" NPT x 3/8"-24 SAE I.F.

Part No.	Qty/Card
444125	1



-3AN Flare Tee

AN	Chrome	Zinc
-3	453330	453330E



Banjo Crush Washer

Size	Part No.	Qty
10mm (3/8")	461099	10 Pack
7/16"	461299	10 Pack

PRECISION performance

Fuel Accessories



Aluminum Tube Fuel Line

Cost Effective line from Fuel Tank to Pump Flare for use with Tube Nut and sleeve or use with compression style Hard Tube adapters.

Part No. Description

737525	3/8" O.D. x 25 Ft. Coil
750025	1/2" O.D. x 25 Ft. Coil
762525	5/8" O.D. x 25 Ft. Coil



Flare Union Adapter with Port



Flare to Pipe Adapter with Port



Tube Nut - Sold 2 per pack

AN Size	NPTF Port	Anodize	Electro+	Part No.
-6	1/8"	60668	60668E	
-8	1/8"	60878	60878E	

AN to Pipe	NPTF Port	Anodize	Electro+	Part No.
-6 - 1/4"	1/8"	60678	60678E	
-6 - 3/8"	1/8"	60688	60688E	
-8 - 1/4"	1/8"	60888	60888E	
-8 - 3/8"	1/8"	60898	60898E	

AN Size	Tube Size	Anodize	Electro+	Part No.
-6	3/8"	60618	60618E	
-8	1/2"	60818	60818E	



Female Hard Tube Fitting



Male Hard Tube Fitting



Tube Sleeve - Sold 2 per pack

AN Size	Tube	Anodize	Electro+	Part No.
-6	3/8"	730613	730613E	
-8	1/2"	730815	730815E	

AN Size	Tube	Anodize	Electro+	Part No.
-6	3/8"	730623	730623E	
-8	1/2"	730825	730825E	

AN Size	Anodize	Electro+	Part No.
-6	60619	60619E	
-8	60819	60819E	



Fuel Pump Fittings

AN Size	Thread	Blue Anodize	Black Anodize	Electro+	Material
-6	1/2"-20 IF	440650A	440650A-BLK	440650AE	Aluminum
-6	5/8"-18 IF	440662A	440662A-BLK	440662AE	Aluminum

Part No.	Description
68424	-8 AN Flare Tee x -4 AN Flare on Run

AN Size	Part No.	Finish	Qty
-3	60318S	Clear Zinc	6
-4	60418S	Clear Zinc	6



Reducing Tee
Return Fitting

Steel Tube Nut

AN Size	Part No.	Finish	Qty
-3	60319S	Clear Zinc	6
-4	60419S	Clear Zinc	6



PRECISION performance

Blue Nitrous Hoses

Guarantee the performance of your Nitrous delivery set up with Precision Performance Pre-Assembled nitrous lines. These premium quality Teflon® Core Stainless Steel Braided lines customize and simplify any plumbing application. Choose from the most extensive selection of pre-made, pre-tested hoses available anywhere.



Part No.	Description	Part No.	Description
703085B	-3AN x 8-1/2" Lg. Blue	704612B	-4AN x -6AN x 12" Blue
703012B	-3AN 12" Lg. Blue	704618B	-4AN x -6AN x 18" Blue
703018B	-3AN x 18" Lg. Blue	704624B	-4AN x -6AN x 24" Blue
703024B	-3AN x 24" Lg. Blue	706012B	-6AN x 12" Lg. Blue
703048B	-3AN x 48" Lg. Blue	706018B	-6AN x 18" Lg. Blue
703412B	-3AN to -4AN x 12" Blue	706024B	-6AN x 24" Lg. Blue
703418B	-3AN to -4AN x 18" Blue	706036B	-6AN x 3' Lg. Blue
703424B	-3AN to -4AN x 24" Blue	706048B	-6AN x 4' Lg. Blue
704312B	-4AN to -3AN x 12" Blue	706072B	-6AN x 6' Lg. Blue
704318B	-4AN to -3AN x 18" Blue	706096B	-6AN x 8' Lg. Blue
704085B	-4AN x 8-1/2" Lg. Blue	706120B	-6AN x 10' Lg. Blue
704012B	-4AN x 12" Lg. Blue	706144B	-6AN x 12' Lg. Blue
704018B	-4AN x 18" Lg. Blue	706168B	-6AN x 14' Lg. Blue
704024B	-4AN x 24" Lg. Blue	706192B	-6AN x 16' Lg. Blue
704036B	-4AN x 3' Lg. Blue	706240B	-6AN x 20' Lg. Blue
704048B	-4AN x 4' Lg. Blue	703885B	-3AN x 1/8" NPT x 8-1/2" Lg. Blue
704072B	-4AN x 6' Lg. Blue	703812B	-3AN x 1/8" NPT x 12" Lg. Blue
704096B	-4AN x 8' Lg. Blue	703824B	-3AN x 1/8" NPT x 24" Lg. Blue
704120B	-4AN x 10' Lg. Blue	703924B	-3AN x -3AN x 90 Deg. X 24" Lg. Blue
704144B	-4AN x 12' Lg. Blue	703948B	-3AN x -3AN x 90 Deg. X 48" Lg. Blue
704168B	-4AN x 14' Lg. Blue	704824B	-4AN x 1/8" NPT x 24" Lg. Blue
704192B	-4AN x 16' Lg. Blue	704836B	-4AN x 1/8" NPT x 3' Lg. Blue
704216B	-4AN x 18' Lg. Blue	704915B	-4AN x -4AN x 90 Deg. X 15" Lg. Blue
704240B	-4AN x 20' Lg. Blue	704924B	-4AN x -4AN x 90 Deg. X 24" Lg. Blue

Red Fuel Lines



Part No.	Description	Part No.	Description
723012R	-3AN x 12" Lg. Red	724624R	-4AN x -6AN x 24" Red
723412R	-3AN x -4AN x 12" Red	726012R	-6AN x 12" Lg. Red
723418R	-3AN x -4AN x 18" Red	726018R	-6AN x 18" Lg. Red
723424R	-3AN x -4AN x 24" Red	726024R	-6AN x 24" Lg. Red
724312R	-4AN to -3AN x 12" Red	723885R	-3AN x 1/8" NPT x 8-1/2" Lg. Red
724318R	-4AN to -3AN x 18" Red	723812R	-3AN x 1/8" NPT 12" Lg. Red
724085R	-4AN x 8-1/2" Lg. Red	723824R	-3AN x 1/8" NPT 24" Lg. Red
724012R	-4AN x 12" Lg. Red	723924R	-3AN x -3AN x 90 Deg. X 24" Lg. Red
724018R	-4AN x 18" Lg. Red	723948R	-3AN x -3AN x 90 Deg. X 48" Lg. Red
724024R	-4AN x 24" Lg. Red	724824R	-4AN x 1/8" NPT x 24" Lg. Red
724036R	-4AN x 3' Lg. Red	724836R	-4AN x 1/8" NPT x 3' Lg. Red
724612R	-4AN x -6AN x 12" Red	724915R	-4AN x -4AN x 90 Deg. X 15" Lg. Red
724618R	-4AN x -6AN x 18" Red	724924R	-4AN x -4AN x 90 Deg. X 24" Lg. Red

PRECISION performance

Male Y-Fitting



Black Anodize	Blue Anodize	Red Anodize	Description
73333-BLK	73333-BLUE	73333-RED	-3 X -3 X -3
73433-BLK	73433-BLUE	73433-RED	-4 X -3 X -3
73444-BLK	73444-BLUE	73444-RED	-4 X -4 X -4
73644-BLK	73644-BLUE	73644-RED	-6 X -4 X -4
73606-BLK	73606-BLUE	73606-RED	-6 X -6 X -6

Nitrous Distribution Block



Machined from 6061 Billet Aluminum

Part No.	Description	Anodize
76412-Blue	(1) 1/8" Inlet/ (4) 1/8" Outlet	Blue
76412-Red	(1) 1/8" Inlet/ (4) 1/8" Outlet	Red
76412-Black	(1) 1/8" Inlet/ (4) 1/8" Outlet	Black

Nitrous Adapters



Filtered Flare Fitting

AN Size	NPTF Size	Blue Anodize	Red Anodize	Material
-4	-1/8	60416F	60416F-RED	Alum
-4	-1/4	60496F		Alum
-6	-1/8	60616F		Alum
-6	-1/4	60676F	60676F-RED	Alum



This part also available in Black Anodize,
add -BLK to the end of the part number.

Pressure Gauge Port Fitting

AN Size	NPTF Port	Blue Anodize w/ 1 Port Hole	Blue Anodize w/ 2 Port Hole	Material
-4	1/8	60441	62441	Alum
-6	1/8	60661	62661	Alum
-8	1/8	60881		Alum



Straight Flare To Pipe Adapter

AN Size	NPTF Size	Anodize	Material
-4	-1/4	60496S	Steel



Steel Adapter Fitting

AN Size	NPTF Size	Yellow Zinc	Material
-4	-1/4	64250S	Steel



PRECISION performance

Fuel Distribution Y Blocks & Fittings



These multi purpose Y-Blocks and Y-Fittings are CNC Machined from 6061-T6 aluminum and available in black, red and blue type II anodize.

These items also qualify for customized laser etching through our Private Label Program.

Female Y-Block

Black Anodize	Red Anodize	Description
76333-BLK	76333-RED	1/8NPT X 1/8NPT X 1/8NPT
76606-BLK	76606-RED	-6 x -6 x -6
76866-BLK	76866-RED	-8 x -6 x -6
76888-BLK	76888-RED	-8 X -8 X -8
76188-BLK	76188-RED	-10 X -8 X -8
76111-BLK	76111-RED	-10 X -10 X -10



Male Y-Fitting

Black Anodize	Blue Anodize	Red Anodize	Description
73333-BLK	73333-BLUE	73333-RED	-3 X -3 X -3
73433-BLK	73433-BLUE	73433-RED	-4 X -3 X -3
73444-BLK	73444-BLUE	73444-RED	-4 X -4 X -4
73644-BLK	73644-BLUE	73644-RED	-6 X -4 X -4
73606-BLK	73606-BLUE	73606-RED	-6 X -6 X -6
73866-BLK	73866-BLUE	73866-RED	-8 X -6 X -6
73888-BLK	73888-BLUE	73888-RED	-8 X -8 X -8
73188-BLK	73188-BLUE	73188-RED	-10 X -8 X -8
73111-BLK	73111-BLUE	73111-RED	-10 X -10 X -10
73222-BLK	73222-BLUE	73222-RED	-12 X -12 X -12



One-Way Check Valves

A NEW ECONOMICAL SOLUTION FOR CHECK VALVE NEEDS

- COMPATIBLE WITH ALL FUELS, OILS AND COOLANTS
- NO LEAKAGE
- ENGINEERED TO FUNCTION IN THE MOST DEMANDING ENVIRONMENTS
- CONSTRUCTION WITH HIGH GRADE LIGHTWEIGHT MATERIALS
- LESS RESTRICTIVE HINGED FLAPPER STYLE DESIGN
- DURABLE DOUBLE COILED STAINLESS TORSION SPRING
- INTERNAL LEAKAGE - 1 D.P.M. MAXIMUM
- LOW OPENING PRESSURE - 2 P.S.I.
- OPERATING PRESSURE RANGE: 5-1500 P.S.I.
- CORROSION RESISTANT TEFLON® FLAPPER SEAL
- HIGH PRESSURE VITON® END CAP SEAL
- OPERATING TEMPERATURE RANGE: -30° TO 400° F

These Check Valves will prevent flow back of any of your fuel, oil or coolant application.

Designed to operate in today's harshest fluid delivery environments, this one-way valve's flapper design offers minimal flow restriction. The higher grade of materials selected for this valve construction will ensure long lasting performance, with an unequaled economic product value. Lightweight, 6061 anodized aluminum housing, available in 37° male flare ends; -4AN to -12AN. The Teflon® flapper is resistant to alcohol, methanol and bio-diesel fuels, and will last longer in continuous higher temperature applications.



Part No.	Size	Dimensions (Diameter x Length)	Color	Part No.	Size	Dimensions (Diameter x Length)	Color
889004-BLK	-4 AN	1.25" X 3.2"	Black	889004-BLUE	-4 AN	1.25" X 3.2"	Blue
889006-BLK	-6 AN	1.25" X 3.9"	Black	889006-BLUE	-6 AN	1.25" X 3.9"	Blue
889008-BLK	-8 AN	1.25" X 3.9"	Black	889008-BLUE	-8 AN	1.25" X 3.9"	Blue
889010-BLK	-10 AN	1.375" X 4"	Black	889010-BLUE	-10 AN	1.375" X 4"	Blue
889012-BLK	-12 AN	1.375" X 4"	Black	889012-BLUE	-12 AN	1.375" X 4"	Blue

Custom Laser Etching available on this product!





Carbureted Style Fuel Pressure Regulator

- Regulates steady pressure from 5 to 12PSI
- -6AN ORB inlet port with two -6AN ORB outlet ports
- Gasoline or Alcohol compatible
- 1/8" NPT fuel pressure port for gauge or line (pressure gauge not included)
- CNC Machined from 6061-T6 Billet Aluminum
- Includes mounting bracket

Manufactured for the quick response performance for fuel delivery to carburetor set ups. Machined from high quality 6061-T6 billet aluminum and is finished in attractive red or black type II anodize. Regulators are also available with a nickel plated base for long lasting fuel compatibility. Designed for street or strip performance carbureted applications, dual stainless steel spring design offers quick response with minimal pressure creep.



Part No.	Size	Finish (Top/Bottom)
970206BB	-6AN	Black/Black Anodize
970206BN	-6AN	Black Anodize/Nickel Plate
970206RN	-6AN	Red Anodize/Nickel Plate



Adjustable EFI By-Pass Fuel Pressure Regulator

- Regulates variable fuel flow requirement from 30-65 PSI for consistent performance
- (3) -6AN ORB Ports
- Gasoline or Alcohol compatible
- 1/8" NPT port for gage or line (pressure gage not included)
- Boost referenced to supply increased fuel for demanding superchargers and turbos at 1:1 ratio
- CNC Machined from 6061-T6 Billet Aluminum
- Mounting bracket included

Designed for today's demanding fuel delivery required for performance fuel injected set-ups, including higher horsepower supercharger and turbo applications. These injected bypass regulators use -6AN inlet and return lines to maintain consistent fuel supply during acceleration, shifting and nitrous changes to fuel demand. Boost reference adapter supplied to allow for increased fuel need during acceleration with superchargers and turbo applications. This regulator is machined from high quality 6061-T6 billet aluminum and is finished in attractive red or black type II anodize. Regulators are also available with a nickel plated base for long lasting fuel compatibility.



Part No.	Size	Finish (Top/Bottom)
950106BB	-6AN	Black/Black Anodize
950106BN	-6AN	Black Anodize/Nickel Plate
950106RN	-6AN	Red Anodize/Nickel Plate

*Custom Laser Etching available
on all Precision Performance
Fuel Pressure Regulators*





Pure-Flow® In-Line Race Fuel Filters

Protect your Hi-Performance Fuel System with this Filter assembly machined from durable 6061 Billet Aluminum. Designed for the most demanding race or street applications. Slim 1-1/4" diameter O.D. allows for easy mounting. Viton® O-Ring sealed single end cap design allows fast and easy access to cleanable 40 Micron wire mesh element.



Replaceable disc style filter element allows for bi-directional filtering. Filter achieves flow rate of 95 Gallons/Hour at 7 PSI. Standard colors: Blue, Red, Black and Clear Anodize.

Part No.	Anodize	AN SIZE	Length
779060-BLUE	Blue	-6	3-3/4"
779060-RED	Red	-6	3-3/4"
779060-BLACK	Black	-6	3-3/4"
779061	Clear	-6	3-3/4"
779080-BLUE	Blue	-8	4"
779080-RED	Red	-8	4"
779080-BLACK	Black	-8	4"
779081	Clear	-8	4"
779000	Replacement Viton® O-Ring Seal		
779001	Replacement 40 Micron Filter Screen		

Custom Laser Etching available on this product!



In-Line Compact Fuel Filters



Pure-Flow™ AN In-Line

Part No.	Size	Length	Color
779044-BLUE	-4AN	2-1/2"	Blue
779044-RED	-4AN	2-1/2"	Red
779044-BLK	-4AN	2-1/2"	Black
779044-CLR	-4AN	2-1/2"	Clear
779066-BLUE	-6AN	2-1/2"	Blue
779066-RED	-6AN	2-1/2"	Red
779066-BLK	-6AN	2-1/2"	Black
779066-CLR	-6AN	2-1/2"	Clear
779088-BLUE	-8AN	2-5/8"	Blue
779088-RED	-8AN	2-5/8"	Red
779088-BLK	-8AN	2-5/8"	Black
779088-CLR	-8AN	2-5/8"	Clear

Flex-Loc™ In-Line

Part No.	Hose	Length	Color
779255-BLUE	5/16"	3"	Blue
779255-RED	5/16"	3"	Red
779255-BLK	5/16"	3"	Black
779255-CLR	5/16"	3"	Clear
779266-BLUE	3/8"	3-1/16"	Blue
779266-RED	3/8"	3-1/16"	Red
779266-BLK	3/8"	3-1/16"	Black
779266-CLR	3/8"	3-1/16"	Clear
779288-BLUE	1/2"	3-3/8"	Blue
779288-RED	1/2"	3-3/8"	Red
779288-BLK	1/2"	3-3/8"	Black
779288-CLR	1/2"	3-3/8"	Clear

779000 Replacement Viton® O-Ring Seal (ALL)

779001 Replacement 40 Micron Filter Screen



NEW! Pure-Flow® In-Line Pro Race Fuel Filters



Blue Anodize	Black Anodize	Filter Dimension	AN Size	Blue Anodize Filter Element	Black Anodize Filter Element	Element Dimension	Nominal Micron	Filter Media	O-Ring Seal (Viton)
778010	778010-BLK	1-3/4 Dia x 6-1/4"	8	789010	789010-BLK	1-1/8 O.D. X 2-3/4" Lg.	10	Pleated Cellulose	789000
778025	778025-BLK	1-3/4 Dia x 6-1/4"	8	789025	789025-BLK	1-1/8 O.D. X 2-3/4" Lg.	25	Pleated Cellulose	789000
778100	778100-BLK	1-3/4 Dia x 6-1/4"	8	789100	789100-BLK	1-1/8 O.D. X 2-3/4" Lg.	100	Pleated Stainless Mesh	789000
771010	771010-BLK	1-3/4 Dia. X 6-1/2"	10	789010	789010-BLK	1-1/8 O.D. X 2-3/4" Lg.	10	Pleated Cellulose	789000
771025	771025-BLK	1-3/4 Dia. X 6-1/2"	10	789025	789025-BLK	1-1/8 O.D. X 2-3/4" Lg.	25	Pleated Cellulose	789000
771100	771100-BLK	1-3/4 Dia. X 6-1/2"	10	789100	789100-BLK	1-1/8 O.D. X 2-3/4" Lg.	100	Pleated Stainless Mesh	789000
772010*	772010-BLK*	2-1/8 Dia X 8-1/4"	12 (Female)	729010	729010-BLK	1-5/8" O.D. X 3-1/2" Lg.	10	Pleated Cellulose	729000
772025*	772025-BLK*	2-1/8 Dia X 8-1/4"	12 (Female)	729025	729025-BLK	1-5/8" O.D. X 3-1/2" Lg.	25	Pleated Cellulose	729000
772100*	772100-BLK*	2-1/8 Dia X 8-1/4"	12 (Female)	729100	729100-BLK	1-5/8" O.D. X 3-1/2" Lg.	100	Pleated Stainless Mesh	729000

*772 Series includes 2 cushion clamps for mounting.

Custom Laser Etching available on all Filters on this page through the Private Label program.





Dual Inlet Carburetor Line Kits

Fully assembled and ready for installation our Dual inlet Kits are ready to get you going. Using either our Power-Flo™, Power-Lite™ or Flex-Lok™ Push-On hose each kit comes with our newly designed adapter fittings made for faster installation. With our new adapters the wrench goes on once and you turn until the adapter is locked in. Each kit comes with the 1/8" port for optional gauge installation, gauges sold separately. Includes Crush Washers.



Size	Part No.	Description	Application
Dual Inlet Kit w/ Braided Hose, AN Fittings w/ 1/8NPT Port-9/16"-24 Thread			
-6	75113	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	BG Demon™ Dual Feed
-6	75113B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	BG Demon™ Dual Feed
-6	75113-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	BG Demon™ Dual Feed
-6	75113E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	BG Demon™ Dual Feed
-6	75113EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	BG Demon™ Dual Feed
Dual Inlet Kit w/ Braided Hose, AN Fittings w/ 1/8NPT Port-7/8"-20 Thread			
-8	75114	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	Holley® Dominator® 4500 Series
-8	75114B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	Holley® Dominator® 4500 Series
-8	75114-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	Holley® Dominator® 4500 Series
-8	75114E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	Holley® Dominator® 4500 Series
-8	75114EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	Holley® Dominator® 4500 Series
Dual Inlet Kit w/ Braided Hose, AN Fittings w/ 1/8NPT Port-7/8"-20 Thread			
-8	75115	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75115B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75115-BLK	Fittings Anodized Black w/ Power-Lite™ Hose (Black Nylon Braided Hose)	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75115E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75115EB	Fittings Electro+ Finish w/ Power-Lite™ Hose (Black Nylon Braided Hose)	Holley® Dual Feed 4150 (Except 4010/4011)
Dual Inlet Kit w/ Push-Lok™ Hose , AN Fittings w/ 1/8NPT Port-7/8"-20 Thread			
-8	75116	Fittings Anodized Blue/Red with Blue Flex-Loc™ Push-On Hose	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75116-BLK	Fittings Anodized Black with Black Flex-Loc™ Push-On Hose	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75116E	Fittings Electro+ Finish with Blue Push-Lok™ Hose	Holley® Dual Feed 4150 (Except 4010/4011)
-8	75116EB	Fittings Electro+ Finish with Black Flex-Loc™ Push-On Hose	Holley® Dual Feed 4150 (Except 4010/4011)
Dual Inlet Kit w/ Braided Hose, AN Fittings w/ 1/8NPT Port-7/8"-20 Thread			
-6	75117	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	Holley® Dual Feed 4150 (Except 4010)
-6	75117B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	Holley® Dual Feed 4150 (Except 4010)
-6	75117-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	Holley® Dual Feed 4150 (Except 4010)
-6	75117E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	Holley® Dual Feed 4150 (Except 4010)
-6	75117EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	Holley® Dual Feed 4150 (Except 4010)
Dual Inlet Kit w/ Braided Hose, AN Fittings w/ 1/8NPT Port-9/16"-24 Thread			
-8	75118	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	BG Demon™ Dual Feed
-8	75118B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	BG Demon™ Dual Feed
-8	75118-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	BG Demon™ Dual Feed
-8	75118E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	BG Demon™ Dual Feed
-8	75118EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	BG Demon™ Dual Feed
Dual Inlet Kit w/ Braided Hose, AN Fittings w/ 1/8NPT Port-9/16"-24 Thread			
-8	75119	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	BG King Demon™ Dual Feed
-8	75119B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	BG King Demon™ Dual Feed
-8	75119-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	BG King Demon™ Dual Feed
-8	75119E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	BG King Demon™ Dual Feed
-8	75119EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	BG King Demon™ Dual Feed

PRECISION performance

Economy Style Dual Inlet Carb Kits

Includes Crush Washer.



Size	Part No.	Description	Application
Braided Hose-Economy Dual Inlet Carb Kit for Holley®			
-6	75109	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	All Holley® 7/8"-20 Thread Inlet Ports
-6	75109B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	All Holley® 7/8"-20 Thread Inlet Ports
-6	75109-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	All Holley® 7/8"-20 Thread Inlet Ports
-6	75109E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	All Holley® 7/8"-20 Thread Inlet Ports
-6	75109EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	All Holley® 7/8"-20 Thread Inlet Ports
Braided Hose-Economy Dual Inlet Carb Kit for Demon®			
-8	75125	Fittings Anodized Blue/Red with Power-Flo™ Stainless Steel Braided Hose	All Demon™ 9/16"-24 Thread Inlet Ports
-8	75125B	Fittings Anodized Black with Power-Flo™ Stainless Steel Braided Hose	All Demon™ 9/16"-24 Thread Inlet Ports
-8	75125-BLK	Fittings Anodized Black with Power-Lite™ Hose (Black Nylon Braided Hose)	All Demon™ 9/16"-24 Thread Inlet Ports
-8	75125E	Fittings Electro+ Finish with Power-Flo™ Stainless Steel Braided Hose	All Demon™ 9/16"-24 Thread Inlet Ports
-8	75125EB	Fittings Electro+ Finish with Power-Lite™ Hose (Black Nylon Braided Hose)	All Demon™ 9/16"-24 Thread Inlet Ports

Carburetor Banjo Adapter Fittings

• Includes two washers

For use on Holley® Carbs

(-6AN x 9/16"-24 Banjo Fitting/Hose End)

Part No.	Description
74423	Blue Banjo w/ Red Socket/Bolt
74423-BLK	Black Banjo, Socket/Bolt
74423E	Electro+ Banjo, Socket/Bolt

For use on Edelbrock®/Carter AFB Carbs

(-6AN x 5/8"-20 Banjo Fitting/Hose End)

Part No.	Description
74427	Blue Banjo w/ Red Socket/Bolt
74427-BLK	Black Banjo, Socket/Bolt
74427E	Electro+ Banjo, Socket/Bolt



PRECISION performance

Carburetor Inlet Adapters



All Fittings now available in Black, just add "-BLK" after Part Number.

AN Size	Port Thread	Anodize	Electro+	Application
-6	7/8"-20	74876	74876E	Holley® 750 - 1350 Pre-'74 Quadrajet
-6	9/16"-24	74878	74878E	Demon™ or BG Dual inlet
-8	7/8"-20	74875	74875E	Holley® 750 - 1350 Pre-'74 Quadrajet
-8	9/16"-24	74877	74877E	Demon™ or BG Dual inlet



All Fittings now available in Black,
just add "-BLK" after Part Number.

AN Size	Port Thread	Blue Anodize	Red Anodize	Electro+	Quantity	Application
-8	7/8"-20	74088	74088-RED	74088E	2 per pack	Holley® Dual 750 to 4500 Dominator
-6	7/8"-20	74068	74068-RED	74068E	2 per pack	Holley® 750 to 1 Pre '74 QuadraJet
-6	5/8"-20	74067	74067-RED	74067E	2 per pack	Carter, AFB Edel
-6	9/16"-24	74069	74069-RED	74069E	2 per pack	BG Demon™ and Holley® Sgl.600-Dual 4010-4011
-8	7/8" -20	74087	74087-RED	74087E	2 per pack	"Short Fitting" Holley® Dual 750 to 4500 Dominator
-8	9/16" -24	74089	74089-RED	74089E	2 per pack	BG Demon™ and Holley® Sgl.600-Dual 4010-4011
-8	7/8" -20	74099	74099-RED	74099E	1 per pack	Holley® Inlet Cap

Fuel Rail Fittings



Part No.	Description
446439A	-6AN to 14MM X 1.5 O-Ring
446639A	-6AN to 16MM X 1.5 O-Ring



AN Adapter Fittings

Precision Performance offers a full line of light weight aluminum adapters that complete your line installation. Adapters are available in standard Bright Dip Blue Anodized or Electro-Plus™ Nickel plating finish. Adapters designed for leakproof sealing with any manufacturers hose ends. Forged aluminum adapters manufactured to aerospace standards.



Straight Flare To Pipe Adapter

AN Size	NPTF Size	Anodize	Electro+ Part No.
-3	1/8	60316	60316E
-4	1/8	60416	60416E
-4	1/4	60496	60496E
-6	1/8	60616	60616E
-6	1/4	60676	60676E
-6	3/8	60686	60686E
-6	1/2	60696	60696E
-8	1/4	60816	60816E
-8	3/8	60886	60886E
-8	1/2	60896	60896E
-10	3/8	61016	61016E
-10	1/2	61086	61086E
-10	3/4	61096	61096E
-12	1/2	61216	61216E
-12	3/4	61296	61296E
-16	3/4	61616	61616E
-16	1	61696	61696E



Flare Union

AN Size	Anodize	Electro+ Part No.
-3	60315	60315E
-4	60415	60415E
-6	60615	60615E
-8	60815	60815E
-10	61015	61015E
-12	61215	61215E
-16	61615	61615E



Flare Plug

AN Size	Anodize	Electro+ Part No.
-3	60306	60306E
-4	60406	60406E
-6	60606	60606E
-8	60806	60806E
-10	61006	61006E
-12	61206	61206E
-16	61606	61606E



Pipe Reducer Bushing

NPTF Thread	Anodize	Electro+ Part No.
1/4 to 1/8	62112	62112E
3/8 to 1/8	63112	63112E
3/8 to 1/4	63212	63212E
1/2 to 1/8	65112	65112E
1/2 to 1/4	65212	65212E
1/2 to 3/8	65312	65312E
3/4 to 3/8	67312	67312E
3/4 to 1/2	67512	67512E
1 to 3/8	61312	61312E
1 to 1/2	61512	61512E
1 to 3/4	61712	61712E



Flare Reducer

AN Sizes	Anodize	Electro+ Part No.
-4 to -3	64317	64317E
-6 to -4	66417	66417E
-8 to -6	68617	68617E
-10 to -6	60617	60617E
-10 to -8	60817	60817E
-12 to -6	62617	62617E
-12 to -8	62817	62817E
-12 to -10	62017	62017E
-16 to -10	67017	67017E
-16 to -12	67217	67217E



Allen Socket Pipe Plug

Pipe Thread	Anodize	Electro+ Part No.
1/8	61204	61204E
1/4	62504	62504E
3/8	63704	63704E
1/2	65004	65004E
3/4	67504	67504E



Female Pipe Thread Coupler

NPTF Thread	Anodize	Electro+ Part No.
1/8"	61210	61210E
1/4"	62510	62510E
3/8"	63710	63710E
1/2"	65010	65010E
3/4"	67510	67510E
1"	61010	61010E



Flare Cap

AN Size	Anodize	Electro+ Part No.
-3	60329	60329E
-4	60429	60429E
-6	60629	60629E
-8	60829	60829E
-10	61029	61029E
-12	61229	61229E
-16	61629	61629E

Male Pipe Thread Nipple

NPTF Thread	Anodize	Electro+ Part No.
1/8"	61211	61211E
1/4"	62511	62511E
3/8"	63711	63711E
1/2"	65011	65011E
3/4"	67511	67511E



PRECISION performance

Female to Male Expanders

Description	Blue Anodize	Black Anodize	Electro+
-3AN FM to -4AN ML *	* Clear Zinc Plated, Steel Fitting, Part No. 63427S		
-4AN FM to -6AN ML	64627	64627-BLK	64627E
-6AN FM to -8AN ML	66827	66827-BLK	66827E
-8AN FM to -10AN ML	68027	68027-BLK	68027E
-10AN FM to -12AN ML	60227	60227-BLK	60227E
-12AN FM to -16AN ML	62627	62627-BLK	62627E



Male to Female Reducers



Part No.	Description	Color
64320	-4AN FM TO -3AN ML	Blue
64320-BLK	-4AN FM TO -3AN ML	Black
64320E	-4AN FM TO -3AN ML	EN Plated
66420	-6AN FM TO -4AN ML	Blue
66420-BLK	-6AN FM TO -4AN ML	Black
66420E	-6AN FM TO -4AN ML	EN Plated
68620	-8AN FM TO -6AN ML	Blue
68620-BLK	-8AN FM TO -6AN ML	Black
68620E	-8AN FM TO -6AN ML	EN Plated

Part No.	Description	Color
60620	-10AN FM TO -6AN ML	Blue
60620-BLK	-10AN FM TO -6AN ML	Black
60620E	-10AN FM TO -6AN ML	EN Plated
60820	-10AN FM TO -8AN ML	Blue
60820-BLK	-10AN FM TO -8AN ML	Black
60820E	-10AN FM TO -8AN ML	EN Plated
62020	-12AN FM TO -10AN ML	Blue
62020-BLK	-12AN FM TO -10AN ML	Black
62020E	-12AN FM TO -10AN ML	EN Plated



Forged Adapter Fittings

All Precision Performance Adapters are machined from light weight Aluminum alloy to AN standards. All 37° flare Adapters fit all industry AN hose ends. All threads are designed for maximum percentage of engagement. All adapters available in Brite DipBlue Anodized finish or Electro-Plus Nickel plating.



90 Degree Flare To Pipe Elbow

AN Size	NPTF	Anodize	Electro+ Part No.
-3	1/8	60322	60322E
-4	1/8	60422	60422E
-4	1/4	60492	60492E
-6	1/8	60622	60622E
-6	1/4	60682	60682E
-6	3/8	60692	60692E
-8	1/4	60822	60822E
-8	3/8	60882	60882E
-8	1/2	60892	60892E
-10	1/2	61022	61022E
-10	3/4	61092	61092E
-12	1/2	61222	61222E
-12	3/4	61292	61292E
-16	3/4	61622	61622E
-16	1	61692	61692E



45 Degree Flare To Pipe Elbow

AN Size	NPTF	Anodize	Electro+ Part No.
-3	1/8	60323	60323E
-4	1/8	60423	60423E
-6	1/8	69623	69623E
-6	1/4	60623	60623E
-8	3/8	60823	60823E
-10	1/2	61023	61023E
-12	3/4	61223	61223E



Flare To Pipe On Run Tee

AN Size	NPTF	Anodize	Electro+ Part No.
-3	1/8	60326	60326E
-4	1/8	60426	60426E
-6	1/4	60626	60626E
-8	3/8	60826	60826E
-10	1/2	61026	61026E
-12	3/4	61226	61226E



Flare Tee
1/8" NPT Port available upon request

AN Size	Anodize	Electro+ Part No.
-3	60324	60324E
-4	60424	60424E
-6	60624	60624E
-8	60824	60824E
-10	61024	61024E
-12	61224	61224E



Flare To Pipe Tee

AN Size	NPTF	Anodize	Electro+ Part No.
-3	1/8	60325	60325E
-4	1/8	60425	60425E
-6	1/4	60625	60625E
-8	3/8	60825	60825E



90 Degree Flare to Flare Elbow
1/8" NPT Port available upon request

AN Size	Anodize	Electro+ Part No.
-6	60621	60621E
-8	60821	60821E



90 Degree Bulkhead Flare
Nut Included

AN Size	Anodize	Electro+ Part No.
-3	60333	60333E
-4	60433	60433E
-6	60633	60633E
-8	60833	60833E
-10	61033	61033E
-12	61233	61233E
-16	61633	61633E



Straight Bulkhead Flare
Nut Included

AN Size	Anodize	Electro+ Part No.
-3	60332	60332E
-4	60432	60432E
-6	60632	60632E
-8	60832	60832E
-10	61032	61032E
-12	61232	61232E
-16	61632	61632E



45 Degree Bulkhead Flare
Nut Included

AN Size	Anodize	Electro+ Part No.
-3	60337	60337E
-4	60437	60437E
-6	60637	60637E
-8	60837	60837E
-10	61037	61037E
-12	61237	61237E



Bulkhead Flare Tee
Nut Included

AN Size	Anodize	Electro+ Part No.
-3	60334	60334E
-4	60434	60434E
-6	60634	60634E
-8	60834	60834E
-10	61034	61034E
-12	61234	61234E
-16	61634	61634E

PRECISION performance

NEW! All Fittings on this page can be ordered in Black Anodize or Electro+, just add “-BLK” or “E” after Part Number.

Special Adapter Fittings



Straight Swivel To Male Pipe Coupler

AN Size	NPT Pipe	Part No.
-4	1/8	60451
-6	1/4	60651
-6	3/8	60652
-8	3/8	60851
-8	1/2	60852
-10	1/2	61051



AN Flare Tee to Female Swivel On Run

Female	Flare	Part No.
-6	-6	60644
-8	-8	60844



AN Flare Tee Female Swivel On Branch

Female	Flare	Part No.
-6	-6	60643
-8	-8	60843



90° Swivel Elbow to Male Pipe

AN Size	NPT Pipe	Part No.
-6	1/4	60654
-6	3/8	60653
-8	3/8	60854
-8	1/2	60853



90° Female to Male AN Swivel Elbow

Male	Female	Part No.
-6	-6	60647
-8	-8	60847



90° Female AN Swivel Elbow

AN Size	Part No.
-6	60646
-8	60846



Straight Swivel Coupler

AN Size	Anodize	Electro+ Part No.
-6	60600	60600E
-8	60800	60800E
-10	61000	61000E
-12	61200	61200E



45 Degree Swivel Coupler

AN Size	Anodize	Electro+ Part No.
-6	60645	60645E
-8	60845	60845E
-10	61045	61045E
-12	61245	61245E



90 Degree Swivel Coupler

AN Size	Anodize	Electro+ Part No.
-6	60690	60690E
-8	60890	60890E
-10	61090	61090E
-12	61290	61290E



Low Profile

**90° Swivel Elbow
Female AN to Pipe**

AN	Pipe	Part No.
-6	1/4	60671
-8	3/8	60871
-8	1/2	60872



Low Profile

**90° Swivel Elbow
Male AN to Pipe**

AN	Pipe	Part No.
-6	1/4	60674
-8	3/8	60874
-8	1/2	60875



Miscellaneous AN Adapter Fittings

All Precision Performance Adapters are machined from light weight Aluminum alloy to AN standards. All 37° flare Adapters fit all industry AN hose ends. All threads are designed for maximum percentage of engagement. All adapters available in Brite DipBlue Anodized finish or Electro-Plus Nickel plating.



Tube Nut



Tube Sleeve



Bulkhead Nut

AN Size	Anodize	Electro+ Part No.
-3	60318	60318E
-4	60418	60418E
-6	60618	60618E
-8	60818	60818E
-10	61018	61018E
-12	61218	61218E
-16	61618	61618E

AN Size	Anodize	Electro+ Part No.
-3	60319	60319E
-4	60419	60419E
-6	60619	60619E
-8	60819	60819E
-10	61019	61019E
-12	61219	61219E
-16	61619	61619E

AN Size	Anodize	Electro+ Part No.
-3	60331	60331E
-4	60431	60431E
-6	60631	60631E
-8	60831	60831E
-10	61031	61031E
-12	61231	61231E
-16	61631	61631E



Flare to Metric

AN Size	Metric Thread	Anodize	Electro+ Part No.
-4	10MMx1.0	64039	64039E
-6	12MMx1.5	66239	66239E
-6	14MMx1.5	66439	66439E
-6	16MMx1.5	66739	66739E
-6	18MMx1.5	66839	66839E
-8	16MMx1.5	68639	68639E
-8	18MMx1.5	68839	68839E
-10	18MMx1.5	69839	69839E



Straight Thread (O-Ring) Plug

AN Size	Anodize	Electro+ Part No.
-3	60314	60314E
-4	60414	60414E
-6	60614	60614E
-8	60814	60814E
-10	61014	61014E
-12	61214	61214E
-16	61614	61614E

AN Size	Blue Anodize	Black Anodize	Electro+	Teflon™ Washer
-6	79006-Blue	79006	79006E	79069
-8	79008-Blue	79008	79008E	79089
-10	79010-Blue	79010	79010E	79109
-12	79012-Blue	79012	79012E	79129

Teflon™ Washers are sold in Packs of 5



Fuel Cell Bulkhead

Includes Nut and Washers

PRECISION performance

Dry Sump/Engine Fittings



45 Degree Elbow

O-Ring included

Hose / Port Combination	Anodize	Electro+ Part No.
#10 Hose to #10 Port x 45 Deg	13045	13045E
#10 Hose to #12 Port x 45 Deg	13046	13046E
#12 Hose to #10 Port x 45 Deg	13246	13246E
#12 Hose to #12 Port x 45 Deg	13245	13245E



90 Degree Elbow

O-Ring included

Hose / Port Combination	Anodize	Electro+ Part No.
#10 Hose to #10 Port x 90 Deg	13090	13090E
#10 Hose to #12 Port x 90 Deg	13091	13091E
#12 Hose to #10 Port x 90 Deg	13291	13291E
#12 Hose to #12 Port x 90 Deg	13290	13290E



O-Ring included

Dry Sump Radius Port to AN Adapter Fittings

Anodize	Electro+	AN Port Size	AN Port Thread	AN Flare Male
77066	77066E	-6	9/16"-18	-6
77068	77068E	-6	9/16"-18	-8
77086	77086E	-8	3/4"-16	-6
77088	77088E	-8	3/4"-16	-8
77081	77081E	-8	3/4"-16	-10
77106	77106E	-10	7/8"-14	-6
77108	77108E	-10	7/8"-14	-8
77101	77101E	-10	7/8"-14	-10
77102	77102E	-10	7/8"-14	-12
77121	77121E	-12	1-1/16"-12	-10
77122	77122E	-12	1-1/16"-12	-12
77126	77126E	-12	1-1/16"-12	-16



Aluminum Welding Bungs

6061 Aluminum - Lipped to prevent warpage

Part Number	Male/ Female	Size	Thread
790656	SAE Female	-6	9/16" -18 SAE
790875	SAE Female	-8	3/4"-16 SAE
791087	SAE Female	-10	7/8" - 14 SAE
791211	SAE Female	-12	1-1/16"-12 SAE
791613	SAE Female	-16	1-5/16"-12 SAE
79906	Male Flare	-6	9/16" -18 SAE
79908	Male Flare	-8	3/4"-16 SAE
79910	Male Flare	-10	7/8" - 14 SAE
79912	Male Flare	-12	1-1/16"-12 SAE
79916	Male Flare	-16	1-5/16"-12 SAE
799125	Female	1/8" Pipe	1/8"-27 NPTF
799250	Female	1/4" Pipe	1/4"-18 NPTF
799375	Female	3/8" Pipe	3/8"-18 NPTF
799500	Female	1/2" Pipe	1/2"-14 NPTF
799750	Female	3/4" Pipe	3/4"-14 NPTF



-12 AN Oil Galley Fitting



Lifter Vent



Oil Restrictor

O-Ring included

Part No.	Description	Part No.	Description	Part No.	Description
77512	Steel Adapter connects -12 AN Oil Line to 1/2" NPT Port	77375	Alloy Aluminum Lifter vent allows engine to breathe	777250	Stainless Steel Fitting Keeps oil where you need it.


PRECISION performance

Size Reference Charts

AN Thread Sizes


AN Size	Metal Tube O.D.	Thread Size	AN Size	Metal Tube O.D.	Thread Size
-3	3/16"	3/8"-24 UNF	-8	1/2"	3/4"-16 UNF
-4	1/4"	7/16"-20 UNF	-10	5/8"	7/8"-14 UNF
-5	5/16"	1/2"-20 UNF	-12	3/4"	1-1/16" UNF
-6	3/8"	9/16"-18 UNF	-16	1"	1-5/16" UNF

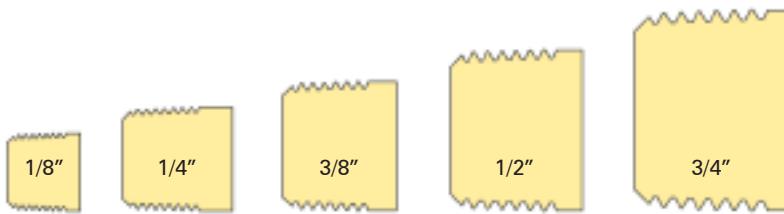Pipe Thread Chart




Male AN O. D. Chart

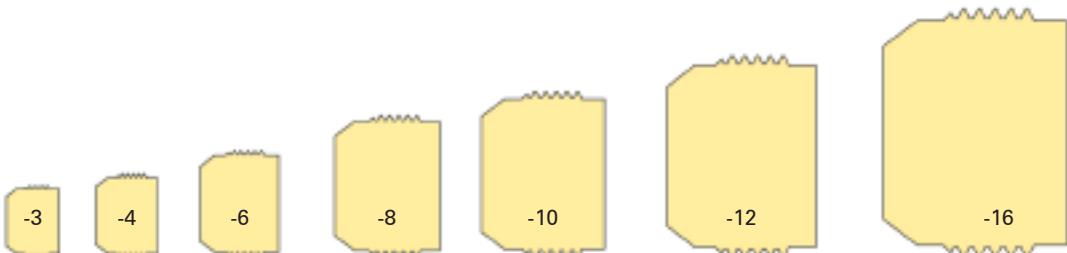These graphics can help in determining the AN size needed before ordering.



B-Nut Sizes

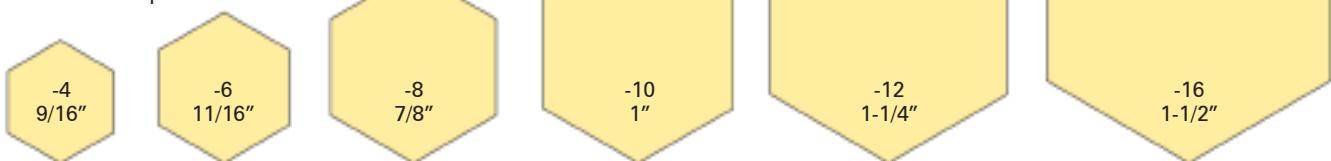These graphics are the actual size of the B-Nuts used on adapters.



Precision Test Kits



For added security and savings be sure your hoses are pressure-tested before installation and use. Packaged for quick access and easy

transportation in a durable plastic container these kits are available in three versions:

Part No.	Number of fittings	Sizes included
PTKIT-316	14 (7 fittings include air valves, 7 standard plugs)	-3AN, -4AN, -6AN, -8AN, -10AN, -12AN and -16AN
PTKIT-3468	8 (4 fittings include air valves, 4 standard plugs)	-3AN, -4AN, -6AN and -8AN
PTKIT-0216	6 (3 fittings include air valves, 3 standard plugs)	-10AN, -12AN and -16AN

Gauge Supply Line Kits

Each kit includes a -3AN Stainless Steel Braided Teflon™ line (36", 48" or 72"), 1/8" NPT to 1/4" NPT adapter bushing, 1/8" NPT female right angle to -3AN male fitting, -3AN male to 1/8" NPT male fitting, -3AN male to 1/8" NPT female fitting, black grommet for firewall.

Part No.	AN SIZE	Hose Length
34336	-3	36"
34348	-3	48"
34372	-3	72"

Each kit includes a -4AN Stainless Steel Braided Teflon™ line (36", 48" or 72"), 1/8" NPT to 1/4" NPT adapter bushing, 1/8" NPT female right angle to -4AN male fitting, -4AN male to 1/8" NPT male fitting, -4AN male to 1/8" NPT female fitting, black grommet for firewall

Part No.	AN SIZE	Hose Length
34436	-4	36"
34448	-4	48"
34472	-4	72"





PRECISION performance

Metric Hose Ends (Used with AN Hose)

Convex Radius Globeseal within female nut creates leak tight seal for European car fluid systems. Conforms to Metric DIN 7631 Series. To be used with Black Nylon or Stainless Steel Hose.



JIC Straight Metric Hose End

Part No.	Size	Color
31400	14mm x 1.5mm x -6AN Hose	BLACK
36600	16mm x 1.5mm x -6AN Hose	BLACK
31600	16mm x 1.5mm x -8AN Hose	BLACK
38800	18mm x 1.5mm x -8AN Hose	BLACK
31800	18mm x 1.5mm x -10AN Hose	BLACK
32200	22mm x 1.5mm x -10AN Hose	BLACK
32600	26mm x 1.5mm x -12AN Hose	BLACK
33000	30mm x 1.5mm x -12AN Hose	BLACK
33600	30mm x 1.5mm x -16AN Hose	BLACK




JIC - 45 Deg Metric Hose End

Part No.	Size	Color
31445	14mm x 1.5mm x -6AN Hose	BLACK
36645	16mm x 1.5mm x -6AN Hose	BLACK
31645	16mm x 1.5mm x -8AN Hose	BLACK
38845	18mm x 1.5mm x -8AN Hose	BLACK
31845	18mm x 1.5mm x -10AN Hose	BLACK
32245	22mm x 1.5mm x -10AN Hose	BLACK
32645	26mm x 1.5mm x -12AN Hose	BLACK
33045	30mm x 1.5mm x -12AN Hose	BLACK
33645	30mm x 1.5mm x -16AN Hose	BLACK



JIC - 90 Deg Metric Hose End

Part No.	Size	Color
31490	14mm x 1.5mm x -6AN Hose	BLACK
36690	16mm x 1.5mm x -6AN Hose	BLACK
31690	16mm x 1.5mm x -8AN Hose	BLACK
38890	18mm x 1.5mm x -8AN Hose	BLACK
31890	18mm x 1.5mm x -10AN Hose	BLACK
32290	22mm x 1.5mm x -10AN Hose	BLACK
32690	26mm x 1.5mm x -12AN Hose	BLACK
33090	30mm x 1.5mm x -12AN Hose	BLACK
33690	30mm x 1.5mm x -16AN Hose	BLACK

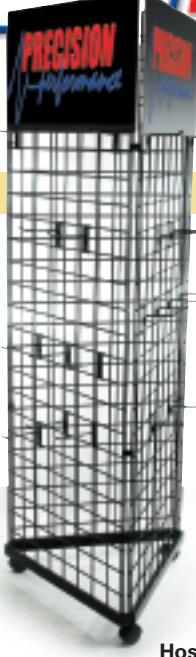

PRECISION performance

Point of Purchase Displays

Mega "POP" Display

Our Mega Display includes some of our most popular items, an easy to assemble display and 3 Header Foam Boards. With 230 pieces of Hardware and over 150' of SS Braided Racing Hose you're in business. (Display is triangular, each side is 2' x 5', includes mobile base, 50 4" Hooks and 50 6" Hooks)

Part Number	Anodize Fittings Color
DSP-3000	Red/Blue
DSP-3000BLK	Black

Hose End

10400	-4AN Straight	2
10600	-6AN Straight	5
10800	-8AN Straight	5
11000	-10AN Straight	5
11200	-12AN Straight	2
10445	-4AN x 45°	2
10645	-6AN x 45°	5
10845	-8AN x 45°	5
11045	-10AN x 45°	2
11245	-12AN x 45°	2
10490	-4AN x 90°	2
10690	-6AN x 90°	5
10890	-8AN x 90°	5
11090	-10AN x 90°	2
11290	-12AN x 90°	2

Power-Flo™ Stainless Steel Braided Hose

320499	-4AN Bulk	20 Feet
320699	-6AN Bulk	50 Feet
320899	-8AN Bulk	50 Feet
321099	-10AN Bulk	50 Feet
321299	-12AN Bulk	20 Feet

Swivel Coupler

60600	-6AN Straight	2
60800	-8AN Straight	2
60690	-6AN x 90°	2
60890	-8AN x 90°	2

Straight Flare to Pipe Adapter

60416	-4 x 1/8" NPT	2
60616	-6 x 1/8" NPT	5
60676	-6 x 1/4" NPT	5
60686	-6 x 3/8" NPT	5
60816	-8 x 1/4" NPT	5
60886	-8 x 3/8" NPT	5
60896	-8 x 1/2" NPT	5
61016	-10 x 3/8" NPT	2
61086	-10 x 1/2" NPT	2
61216	-12 x 1/2" NPT	2

90° Flare To Pipe Elbow

60422	-4 x 1/8" NPT	2
60492	4 x 1/4" NPT	2
60622	-6 x 1/8" NPT	2
60682	-6 x 1/4" NPT	5
60692	-6 x 3/8" NPT	2
60822	-8 x 1/4" NPT	2
60882	-8 x 3/8" NPT	5
60892	-8 x 1/2" NPT	2
61022	-10 x 1/2" NPT	2
61222	-12 x 1/2" NPT	2

Tube Nut

60618	-6AN (3/8" Tube), 2 Pack	5
60818	-8AN (1/2" Tube), 2 Pack	5

Tube Sleeve

60619	-6AN, 2 Pack	5
60819	-8AN, 2 Pack	5

Flare Tee

60424	-4AN	2
60624	-6AN	5
60824	-8AN	5
61024	-10AN	2

Flare Cap

60429	-4AN	2
60629	-6AN	5
60829	-8AN	5
61029	-10AN	2
61229	-12AN	2

Allen Socket Pipe Plug

61204	1/8" Pipe Thread, 2 Pack	2
62504	1/4" Pipe Thread, 2 Pack	2
63704	3/8" Pipe Thread, 2 Pack	2
65004	1/2" Pipe Thread, 1 Pack	2

Flare Union Adapter w/ Port

60668	-6AN x 1/8" NPT Port	2
60878	-8AN x 1/8" NPT Port	2

Flare To Pipe Adapter w/ Port

60678	-6-1/4" w/ 1/8" NPTF Port	2
60688	-6-3/8" w/ 1/8" NPTF Port	2
60898	-8-3/8" w/ 1/8" NPTF Port	2

Female Hard Tube Fitting

730613	-6AN x 3/8"	5
730815	-8AN x 1/2"	5

Male Hard Tube Fittings

730623	-6AN x 3/8"	5
730825	-8AN x 1/2"	5

Aluminum Tube Fuel Line

737525	3/8" O.D. x 25'	1
750025	1/2" O.D. x 25'	1

Carb Adapters and Carb Kits

74068	Holley® 750 to 1 Pre '74 QuadraJet (Pair w/ washers) - 6AN w/ 7/8"-20 Port Thread	5
74069	BG Demon™ and Holley® Dual 750 to 4500 Dominator (Pair w/ washers) -6AN w/ 9/16"-24 Port Thread	2
74876	Holley® 750-1350 Pre-'74 QuadraJet (Pair w/ washers) -6AN w/ 7/8"-20 Port Thread	2
74878	Demon™ or BG Dual Inlet (Pair w/ washers) -6AN w/ 9/16"-24 Port Thread	2
74875	Holley® 750-1350 Pre-'74 QuadraJet (Pair w/ washers) -8AN w/ 7/8"-20 Port Thread	2
75115	Dual Inlet Kit, -8AN w/ 1/8NPT Port-7/8"-20 Thread (Holley® Dual Feed, Except 4010/4011)	2
75118	Dual Inlet Kit, -8AN w/ 1/8NPT Port-9/16"-24 Thread (BG Demon™ Dual Feed)	2

PRECISION performance

Medium "POP" Display

Don't want to start off Mega Size or maybe want to add to existing inventory this Medium Display is the answer. We've narrowed the list of top sellers to reduce costs but not variety. Complete w/ 1- 2'x5' grid wall panel, pair of grid legs, 50 grid hooks and 1-Double Sided Foam Header Board (168 pieces of Hardware/ 125' of Power-Flo™ Hose)

Part Number	Anodize Fittings Color
DSP-2000	Red/Blue
DSP-2000BLK	Black

Hose End

10600	-6AN Straight	5
10800	-8AN Straight	5
11000	-10AN Straight	5
10645	-6AN x 45°	5
10845	-8AN x 45°	5
11045	-10AN x 45°	2
10690	-6AN x 90°	5
10890	-8AN x 90°	5
11090	-10AN x 90°	2

Power-Flo™ Stainless Steel Braided Hose

320699	-6AN Bulk	50
320899	-8AN Bulk	50
321099	-10AN Bulk	25

Swivel Coupler

60600	-6AN Straight	2
60800	-8AN Straight	2
60690	-6AN x 90°	2
60890	-8AN x 90°	2

Straight Flare to Pipe Adapter

60676	-6 x 1/4" NPT	5
60686	-6 x 3/8" NPT	5
60886	-8 x 3/8" NPT	5
60896	-8 x 1/2" NPT	5
61086	-10 x 1/2" NPT	2


Flare Tee

60624	-6AN	5
60824	-8AN	5

Carb Kits

74068	Holley® 750 to 1 Pre '74 QuadraJet* -6AN w/ 7/8"-20 Port Thread	3
74069	BG Demon & Holley® Dual 750 to 4500 Dominator -6AN w/ 9/16"-24 Port Thread	2
74876	Holley® 750-1350 Pre-'74 QuadraJet -6AN w/ 7/8"-20 Port Thread	2
74878	Demon® or BG Dual Inlet -6AN w/ 9/16"-24 Port Thread	2
74875	Holley® 750-1350 Pre-'74 QuadraJet -8AN w/ 7/8"-20 Port Thread	2
75115	Dual Inlet Kit, -8AN w/ 1/8NPT Port-7/8"-20 Thread (Holley® Dual Feed, Except 4010/4011)	1
75118	Duel Inlet Kit, -8AN w/ 1/8NPT Port-9/16"-24 Thread (BG Demon® Dual Feed)	1

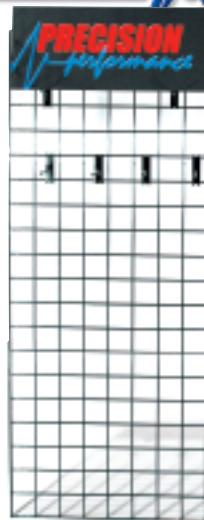*Pair w/ washers



Mini "POP" Display

The perfect solution for small spaces. This display contains our top 20 selling hardware items, a heavy-duty wall mount display, 20- 4" hooks and a foam header board. The display is a heavy-duty, translucent white polypropylene pegboard with three times greater holding power than traditional pegboards. This display is durabale, washable and weather resistant. (Display is square and measures 48"W x 24"H and a header board 36"W x 12"H)

Part No.	Anodize Fittings Color
DSP-1000	Blue/Red
DSP-1000BLK	Black
DSP-1000E	Electro+

Hose End

10600	-6AN Straight	4
10800	-8AN Straight	4
11000	-10AN Straight	2
10645	-6AN x 45°	2
10845	-8AN x 45°	2
10690	-6AN x 90°	4
10890	-8AN x 90°	4
11090	-10AN x 90°	2

Straight Flare To Pipe Adapter

60676	-6 x 1/4" NPT	2
60686	-6 x 3/8" NPT	4
60886	-8 x 3/8" NPT	4
61086	-10 x 1/2" NPT	2

90° Flare To Pipe Elbow

60682	-6 x 1/4" NPT	2
60882	-8 x 3/8" NPT	2

Flare Tee

60624	-6AN	4
60824	-8AN	4

Carburetor Fittings

74068 w/ 7/8"-20 Port Thread 2 Pack	2
74069 -6 w/ 9/16"-24 Port Thread, 2 Pack	2

Flare Caps

60629 -6AN	4
60829 -8AN	4

PRECISION performance

Private Labeled Program

Join hundreds of companies worldwide in the fastest growing segment of the performance plumbing market...



- Significantly higher profit margins than the restricted levels with brand names
- Made in the USA products that meet ISO quality standards
- Full marketing program that promotes your company
 - Customized catalogs
 - Customized packaging
 - Customized advertising
 - Specialized logos on products
 - Point of purchase displays promoting your name
 - Bar code labeling specific to your needs
- Product liability coverage protecting your business
- Introductory offers and regular promotions tailored to interest your sales people and customers
- Customized products and customized conditions of sale that meet your needs
- Sales tracking information that allows you to monitor product sales and inventories

No more lost sales due to non-existent margins -
Discounted private label pricing gives you the competitive edge.

Create Customer Loyalty to Your Name -

Contact Precision Performance for further information on developing a private label product line for your company...

SALES 800.526.9144



Precision Performance is your one source for
American V-Twin Brake Line Kits and Oil/fuel Lines.










Need components to make your own custom kits?
Precision Performance has you covered!

Call today.

Custom Harley-Davidson courtesy of Hawg Halters, Inc.

PRECISION performance

BRAKE LINE COMPONENTS

	Crushwashers 105 3/8" (10 PK) 106 7/16" (10 PK) 31050 10MM (10 PK) 31062 12MM (10 PK)		151 90° Banjo, -3AN x 10MM (3/8")		290 Universal Front (Dual Disc) Brake Tee, 3/8" - 24 Inverted Flare		304 Rear Brake Banjo, -3AN x 90° Short
	107 Banjo Bolt "Special"- 3/8" - 24 (Bolt Length .750 -Head)		152 Straight Banjo, -3AN x 7/16"		291 Universal Front (Dual Disc) Brake Tee, 1/8" NPT		NEW! 305 Forward Control Banjo, -3AN x 90° Long
	109 Banjo Bolt - 3/8" - 24 (Bolt Length .937 -Head)		153 35° Banjo, -3AN x 7/16"		293 Adapter, -3AN x 1/8" NPT Male 45°		306 Male Junction Block, -3AN Front Glide
	115 Banjo Bolt - 7/16" - 24		154 90° Banjo, -3AN x 7/16"		296 Dual Disc Brake Tee (Front, Dome Design) -3AN x 3/8" -24		307 Male Junction Block, -3AN Front Narrow Glide
	117 Double Banjo Bolt - 3/8" - 24		244 Adapter, -3AN x 1/8" NPT Male		297 Rear Brake Switch Block		380 -3AN x 3/8" - 24 Inverted Flare 90° x 120°
	121 Banjo Bolt, 7/16" (Banjo) x 3/8" - 24 Thread		279 Adapter, -3AN x 1/8" NPT Male 90°		297 Rear Brake Switch Block		280 -3AN x 3/8" - 24 Inverted Flare 90° x 120° Sold in pairs
	125 Banjo Bolt Adapter - 1/8" NPT FM x 3/8" - 24		281 Inverted Flare Adapter 45°, -3AN x 3/8" - 24		298 -3AN Male Tee		396 -3AN x 3/8" - 24 Inverted Flare Male
	147 Straight Banjo, -3AN x 10MM (3/8")		282 Inverted Flare Adapter 90° Short, -3AN x 3/8" - 24		300 Rear Banjo, 35° Short - 1/8" NPT		633 Flare Union for Rear Calipers, -3AN
	149 90° "Extended Length" Banjo, -3AN x 10MM (3/8")		283 Inverted Flare Adapter 90° Long, -3AN x 3/8" - 24		301 Rear Banjo, 90° Short - 1/8" NPT		979 Barrel Tee
	150 35° Banjo, -3AN x 10MM (3/8")		284 Inverted Flare Adapter 150°, -3AN x 3/8" - 24		302 Forward Control Banjo 90° Long - 1/8" NPT		4385627 Hydraulic Hose Adapter
36					303 Rear Brake Banjo, -3AN x 35° Short		SALES 800.526.9144



PRECISION performance

OIL & FUEL LINES



SS Braided Fuel Cross-Over

Part No.	Description
590	Fits '93 and Later Dyna Glide Models
592	Fits '00 and Later Softail except FXSTD
594	Fits '00 and Later Softails FXSTD Models
596	Fits '86-'99 Softail Models
598	Fits all '97 and Later Touring Models

Pre-Assembled Oil Line

Part No.	Length	Part No.	Length	Part No.	Length
608	8"	613	13"	618	18"
609	9"	614	14"	620	20"
610	10"	615	15"	622	22"
611	11"	616	16"	624	24"
612	12"	617	17"	626	26"

Oil Line Kit

Part No.	Description
606000	SOFTAIL 1987-89 (KIT CONTAINS 4 LINES)
606001	SOFTAIL 1990-EARLY 92 (KIT CONTAINS 6 LINES)
606002	LATE 1992- 99 ALL SOFTAILS (KIT CONTAINS 4 LINES)
606003	FXR 1987-90 (KIT CONTAINS 4 LINES)
606004	FXR 1991-94 (KIT CONTAINS 5 LINES)
606007	SPORTSTERS XL 1986-90 ALL (KIT CONTAINS 5 LINES)
606008	SPORTSTERS XL 1991-93 ALL (KIT CONTAINS 4 LINES)
606009	SPORTSTERS XL 1994-02 ALL (KIT CONTAINS 3 LINES)
606100	ALL DYNA GLIDES 1992-98 (KIT CONTAINS 3 LINES)

SS Clear Coated Universal DOT Brake Line

Part No.	Length						
809	9"	823	23"	843	43"	864	64"
810	10"	824	24"	844	44"	866	66"
811	11"	825	25"	845	45"	868	68"
812	12"	826	26"	846	46"	869	69"
813	13"	827	27"	847	47"	870	70"
814	14"	828	28"	848	48"	871	71"
815	15"	830	30"	850	50"	872	72"
816	16"	832	32"	852	52"	874	74"
817	17"	834	34"	854	54"	876	76"
818	18"	835	35"	856	56"	878	78"
819	19"	836	36"	858	58"	880	80"
820	20"	838	38"	860	60"		
821	21"	840	40"	861	61"		
822	22"	842	42"	862	62"		

New! METRIC UNIVERSAL BRAKE LINE COMPONENTS



Metric Banjo Bolts

Part No.	Description	Crushwashers Included
31071	"Short" Banjo Bolt, 10MM x 1.00 (18MM Long)	2 of 31050
31090	Banjo Bolt, 10MM x 1.25 (20MM Long)	2 of 31050
31091	Banjo Bolt, 10MM x 1.00 (22MM Long)	2 of 31050
31095	Banjo Bolt, 10MM x 1.50 (20MM Long)	2 of 31050

Part No.	Description	Crushwashers Included
31152	Banjo Bolt, 12MM x 1.50 (24MM Long)	2 of 31062
31170	Double Banjo Bolt, 10MM x 1.25 (35MM Long)	3 of 31050
31171	Double Banjo Bolt, 12MM x 1.00 (35MM Long)	3 of 31062



31200 Straight Banjo, -3AN x 12MM



31235

35° Banjo, -3AN x 12MM



31290

90° Banjo, -3AN x 12MM



PRECISION performance

BRAKE LINE KITS



Part No. Series Kit
640110 DYNA Front

Braided Brake Line FXDL
(Single Disc) 01 - 03 FXDL



640111 DYNA Rear

Braided Brake Line Kit
00 - 03 All Dyna's



640112 DYNA Front

Braided Brake Line, (Single Disc)
00-03 FXD (Dyna Super Glide)



640113 DYNA/Sport Front

Braided Brake Line (Single Disc)
88 - 03 XLH1200,
95-99 FXD Superglide,
88-94FXR, 88-92 FXRS



640114 DYNA Front

Braided Brake Line (Dual Disc)
94- 99 FXDS-Conv.,
89-93FXRS-Conv.



640115 DYNA/Soft Front

Braided Brake Line (Single Disc)
84 -99 FXSTC and 93 -03
FXDWG



640116 DYNA Front

Braided Brake Line (Dual Disc)
96 -00 FXDL



640117 DYNA Front

Braided Brake Line (Dual Disc)
99-03 FXDX, 01-03 FXDXT,
02 883R



Part No. Series Kit
640210 SOFTAIL Front

Braided Brake Line Kit
(Single Disc)
99-03 FXST Softail Standard



640211 SOFTAIL Front

Braided Brake Line FXST
(Single Disc), 00-03 FXSTD



640212 SOFTAIL Front

Braided Brake Line (Single Disc)
88-03 FXSTS Models,
Except Bad Boy



640213 SOFTAIL Front

Braided Brake line (Single Disc)
95-97 FXSTSB, 97-03 FLSTS



640214 SOFTAIL Front

Braided Brake Line (Single Disc)
87-99 FLSTC, '90-03 FLSTF,
FLSTN



640215 SOFTAIL Front

Braided Brake Line (Single Disc)
99-03 FXSTB



640220 SOFTAIL Rear

Braided Brake Line Kit
87 - 99 FLSTC, FLSTS,
90-99 FLSTF



640221 SOFTAIL Rear

Braided Brake Line Kit
00-03 All Softails
(except FXSTDSE2)



PRECISION performance



Part No. Series Kit
640222 SOFTAIL Rear
Braided Brake Line Kit
89-99 FXSTC, FXSTS,
95-97 FXSTSB,
99-03 FXST, FXSTB



640310 SPORTSTER Front
Braided Brake Line (Single Disc)
88-03 XLH 883 Hugger,
92-03 XLH883
99-03 XL883 Custom
(except 02-03 XL883R),
XL1200 Custom



640311 SPORTSTER Front
Braided Brake Line (Single Disc)
96-98 XL 1200 Custom



Part No. Series Kit
640312 SPORTSTER Front
Braided Brake Line (Dual Disc)
96 -03 XL1200 Sport



640320 SPORTSTER Rear
Braided Brake Line Kit, 00-03
XL



640410(*) TOURING Front
Braided Brake Line (Dual Disc)
94-03 FLHR Models
(except FLHRSEI2),
1998-03 FLTR/I
*Can be ordered in a
+2, +4, +6, etc.
Order using # 640410-Special.

HIGH PERFORMANCE
RACING HOSES
HOSE ENDS
BRAKE LINES/FITTINGS
ADAPTERS
ACCESSORIES
PRIVATE LABEL PROGRAMS
RETAIL DISPLAYS



PRECISION PERFORMANCE

4725 28TH STREET NORTH, SAINT PETERSBURG, FLORIDA 33714

SALES 800.526.9144 • TECHNICAL 727.526.9165 • FACSIMILE 727.527.9593

PRECISIONPERFORMANCEINC.COM