

2006-2007



CI

Ingalls

Engineering

Passenger Car
Applications

Light Truck
Applications

Product Section



Light Truck
Passenger Car
MiniVan

Wheel Alignment Products

Performance Suspension
Components

Alignment Tools

Cross Over

Index



New Products

Suspension Kits & Components



See Page 105 & 146

SmartArms™ Adjustable Rear Arms



See Page 126-127

Steel Braided Lines



See Page 107

Ford Super Duty Bushings



See Page 109

The Stiffy™, Engine Torque Damper



See Page 145

VW Rear Shims & Adjustable Ball Joint Mount



See Page 112 & 118

Subaru WRX Powerstick™, Engine Torque Damper



See Page 145

Dodge & Jeep Offset Ball Joints



See Page 109

Contents

Vehicle Index	1-3
Passenger Car Applications	4-72
Light Truck Applications	73-103
Product Listings	104-146
Competitor Cross Over	147-149
Numerical Index	150-152
Alignment Terms	Inside Back Cover

Vehicle Index

Acura	
2.2 CL	4
2.3 CL	4
2.5 TL	4
3.0 CL	4
3.2 CL	5
3.2 TL	5
3.5 RL	5-6
Integra	6
Legend	6
NSX	6
RSX	7
TSX	7
Vigor	7
AMC	
Concord	8
Eagle	8
Audi	
100	8
100 Quattro 4wd	8
200	8
200 Quattro 4wd	8
4000 2wd	8
4000 4wd Quattro	8
5000 2wd	8
5000 4wd Quattro	8
80/90	9
80/90 Quattro	9
90	9
90 Quattro	9
A4	9
A4 Quattro	9
A6	9
A6 Quattro	9
A8	9
Cabriolet	9
Fox	9
GT Coupe	9
Quattro	10
Quattro V-8	10
S4	10
S6	10
TT	10

Buick	
Apollo	10
Century FWD	10
Century RWD	10
Electra FWD	11
Estate Wagon	11
LaCrosse	11
LeSabre	11
Lucerne	11
Park Ave FWD	12
Reatta	12
Regal	12
Regal FWD	12
Regal RWD	12
Riviera	12
Roadmaster	13
Skyhawk FWD	13
Skylark FWD	13
Skylark RWD	13
Somerset	13
Terraza FWD	13-14

Cadillac	
Allante	14
Catera	14
Cimarron	14
CTS/CTS-V	14
Deville FWD	14
Deville RWD	14
DTS	14
Deville/Concours	15
Eldorado	15
Fleetwood FWD	15
Fleetwood RWD	15
Seville/Seville STS	15

Chevrolet	
Astro/Safari	16
Aveo	16
Beretta	16
Cobalt	16
Camaro	16
Caprice	16
Cavalier	17
Celebrity	17
Chevette	17
Citation	17

Corsica	17
Corvette	17-18
Equinox	18
HHR	18
Impala	18
Lumina	18
Lumina APV	18
Malibu	18
Metro	19
Monte Carlo	19
Nova FWD	19
Prizm	19
Spectrum	19
Uplander	19
Venture	20

Chrysler	
300M	20
Cirrus	20
Concorde	20
Conquest	20
Cordoba	20
Crossfire	20
E-Class	20
Executive	21
Fifth Ave	21
Imperial	21
Laser	21
LeBaron	21
LHS	21
New Yorker FWD	22
Newport	22
PT Cruiser	22
Pacifica AWD/FWD	22
Sebring 2dr	22
Sebring Conv.	22
Sebring/Exc. Conv.	22
Town & Country	23

Daewoo	
Leganza	24
Nubira	24

Daihatsu	
Charade	24

Dodge	
600	24
Aries	24
Avenger	24
Caravan	25
Challenger	25
Charger	25
Colt FWD	25
Colt Vista	26
Colt Wagon	26
Conquest	26
Daytona	26
Diplomat	26
Dynasty	26
Intrepid	26
Lancer	27
Magnum	27
Mini Ram Van	27
Monaco	27
Neon	27
Omni	27
Shadow	27
Spirit	28
Stealth	28
Stratus	28
Viper	28

Eagle	
Medallion	28
Premier	28
Summit	29
Talon AWD	29
Talon FWD	29
Vision	29

Fiat	
124	30
128 Coupe	30
128 Hatchback	30
128 Sedan	30
128 Wagon	30
131	30
Brava	30
Spyder	30

Vehicle Index

Ford

Aerostar	30
Aspire	30
Contour	31
Crown Victoria	31
Escort	31
EXP	31
Fairmont	31
Festiva	31
Fiesta	31
Five Hundred	32
Freestar	32
Freestyle FWD/AWD	32
Focus	32
Granada	32
LTD	32
Mustang	32-33
Probe	33
Taurus Sedan	33
Taurus Wagon	33
Tempo	33
Thunderbird	33
Windstar	34
ZX2	34

Geo

Metro	34
Prizm	34
Storm	34

Honda

Accord	34-35
Accord Wagon	35
Civic	36-37
Civic SI	37
CRX	37
Del Sol	37
EV+	38
Insight	38
Odyssey	38
Pilot	38
Prelude	38-39
S2000	39

Hyundai

Accent	39
Elantra	39
Excel	40
Pony	40
Scoupe	40
Sonata	40
Stellar	40
Tiburon	40

Infiniti

G20	40
G35	40
I30	41
I35	41
J30	41
Q45	41

Isuzu

I-Mark FWD	41
I-Mark RWD	41
Impulse	41
Oasis	41
Stylus	41

Kia

Optima	42
Rio	42
Sedona	42
Sephia	42
Spectra	42

Lexus

ES250	42
ES300	42
ES330	42
ES350	42
GS300	42
GS400	42
GS430	42
IS300	42
IS350	42
LS400	43
LS430	43
SC300	43
SC400	43
SC430	43

Lincoln

Continental FWD	43
Continental RWD	43
LS	43
Mark VII	43
Mark VIII	43
Town Car	43

Mazda

3	43
5	43
6	43
323	43
626 FWD	43
929	44
GLC FWD	44
Miata	44
Millenia	44
MPV	44
MX-3	44
MX-6	44
Protégé	45
RX-7	45
RX-8	45
Serenia	45

Mercury

Capri	45
Colony Park	45
Cougar	45
Grand Marquis	45
LN7	46
Lynx	46
Marauder	46
Marquis	46
Montego FWD/AWD	46
Monterey	46
Mystique	46
Sable Sedan	46
Sable Wagon	46
Topaz	47
Tracer	47
Villager	47
Zephyr	47

Mitsubishi

3000 GT	47
Cordia	47
Diamante	47
Eclipse	48
Expo	48
Galant	48
Lancer/EVO	49
Mirage	49
Precis	49
Tredia	49

Nissan

200SX	49
240SX	49
300ZX	50
350Z	50
Altima	50
Axxess	50
Maxima	50
NX	50
Pulsar	50
Quest	50
Sentra	51
Stanza	51
Van	51

Oldsmobile

Regency FWD	51
88	51
98 Regency FWD	52
98 Regency RWD	52
Achieva	52
Alero	52
Aurora	52
Calais	53
Ciera	53
Custom Cruiser	53
Cutlass	54
Firenza	54
Intrique	54
LSS	54
Omega	54
Silhouette	55
Toronado	55

Plymouth

Acclaim	55
Breeze	55
Caravelle FWD	56
Duster	56
Horizon	56
Laser	56
Neon	56
Prowler	56
Reliant	56
Scamp	57
Sundance	57
TC3	57
Turismo	58
Voyager	58

Pontiac

6000	59
Bonneville	59
Fiero	59
Firebird-TA	60
Firefly	60
G6	60
Grand Am	60
Grand Prix	60

GTO	60
J2000	61
Montana	61
Phoenix	62
Soltice	62
Sunbird	62
Sunburst	62
Sunfire	62
Torrent	62
Transport	63
Vibe	63

Porsche

All	63
-----------	----

Renault

Alliance	63
Encore	63
GTA	63

Saab

900	63
900	63
9 ³	63
9 ⁵	63
99	63

Saturn

Ion	64
L-Series	64
S-Series	64
Relay AWD/FWD	64
Vue	64

Scion

TC	65
Xa & Xb	65

Subaru

B9 Tribeca	65
Baja	65
Forester	65
Impreza	65
Justy	65
Legacy	65
Outback	65
SVX	65
WRX	66

Suzuki

Aerio	66
Esteem	66
Reno	66
Swift	66
Verona	66

Toyota

Avalon	66
Camry	66
Celica	67
Corolla	67
Cressida	68
Echo	68
Matrix	68
MR2	68
Paseo	68
Previa	68
Prius	68
Sienna	68

Vehicle Index

Solara	69	Chevrolet/GMC 4 Wheel Drive	Explorer Sport Trac	89	Lexus	
Supra	69	Avalanche	F100	89	GX470	99
Tercel	69	Colorado	F150	89	LX450	99
Van	69	Envoy	F150 Heritage 2004	89	LX470	99
Volkswagen		K10 Blazer, K15 Jimmy	F250 - Super Duty	90-91	RX300 & RX330	99
Beetle	69	K10, K20 Suburban	F250	91	Lincoln	
Cabrio	69	K10-K25 Pickup	F350	92-93	Aviator	99
Cabriolet	69	K1500 Blazer, K1500 Jimmy	F350 - Super Duty	94	Blackwood/EXT	99
EuroVan	70	K1500 Tahoe, K1500 Yukon	F450, F550 Super Duty	94-95	Lincoln Navigator	99
Fox	70	K1500, K2500 Suburban	Ranger	95	Mazda 4x2 & 4x4	
Golf	70	K1500-K2500	Geo 4x4		B2300	100
GTI	70	K30 (Dana 60/70 axle)	Tracker	95	B2500	100
Jetta	70	K3500	Honda		B3000	100
Passat	71	S10, S15 Blazer, Jimmy,	CRV	96	B4000	100
Quantum	71	Tracker	Element	96	MPV	100
Rabbit	71	Trailblazer	Passport	96	Navajo	101
Scirocco	72	V10 Blazer, V15 Jimmy	Pilot	96	Tribute	101
Vanagon	72	V10-V25	Ridgeline	96	Mercedes	
Volvo		V10-V2500 Suburban	Hyundai		ML320/ML430	101
240 1980-93	72	V10-V3500	Sante Fe	96	Mercury	
260 1980-84	72	V30 (Dana 60/70 axle)	Tucson	96	Mariner 4x4 & 4x2	101
GLT 1980-84	72	Dodge/Plymouth 4x2	Infiniti		Mountaineer	101
740 1982-92	72	1500	FX35 & FX45	96	Mitsubishi 4x2 & 4x4	
760 1982-87	72	2500	QX4	96	Endeavor	101
780 1982-87	72	3500	International 4x4		Montero, Pickup	101
940 1991-97	72	B100-B350	100 Travelall	96	Outlander	101
960 1995-97	72	Colt Vista	Scout XLC, Scout II	96	Pickup	101
960 1988-90	72	D100-D350	Isuzu 4x2 & 4x4		Nissan/Datsun 4x2 & 4x4	
780 1988-90	72	Dakota	Amigo	97	Frontier	101
960 1991-94	72	Durango	Ascender	97	Murano	101
850 1993-97	72	Ram 50	Axiom	97	Pathfinder	102
C70, S70, V70 1998-01	72	Ramcharger, Trailduster	Hombre	97	Pickup	102
S80 1998-01	72	Dodge/Plymouth 4x4	Pickup	97	Xterra	102
S90, V90 1997	72	1500	Trooper	97	Oldsmobile	
Yugo		2500 HD	Trooper II	97	Bravada	102
GV Series 1986-91	72	2500 LD	Vehi'Cross	97	Pontiac	
Light Trucks		3500	Jeep		Aztec	102
Acura		Dakota	CJ Series	97	Subaru	
MD-X	73	Durango	Comanche	97	Brat	102
BMW		Raider	Downsize Cherokee	98	Suzuki 4x4	
X-5	73	Ram 50	Downsize Wagoneer	98	Samurai	102
Buick		Ramcharger, Trailduster	Full-size Cherokee	98	Sidekick	102
Rendezous	73	W100-W250	Full-size Wagoneer	98	Vitara, Grand Vitara	102
Cadillac		W300, W350	Grand Cherokee	98	X-90	102
Escalade	73	Ford 4x2	Grand Wagoneer	98	XL-7	102
ESV	73	Bronco II	J10-J20	98	Toyota 4x2 & 4x4	
EXT	73	E100-E350	Liberty	98	4 Runner 4x2	102
Chevrolet/GMC 2 Wheel Drive		Escape	Wrangler	98	4 Runner 4x4	102
C1500, C2500 Suburban	73	Excursion	Kia		Cab & Chassis	102
C1500-C3500	73	Expedition	Sorento	98	Highlander	103
Colorado	73	Explorer	Sportage	98	Landcruiser SW	103
Envoy	73	Explorer Sport Trac	Land Rover		Pickup 4x2	103
G10-G2500	73	F100	Defender 90	99	Pickup 4x4	103
G30, 3500	74	F150	Discovery	99	RAV4	103
P20-P3500	74	F250	Discovery II	99	Sequoia	103
R10, Blazer, Jimmy	74	F250 HD	Freelander	99	T100 4x2	103
R10-R3500	74	F350	Land Rover	99	T100 4x4	103
S10, S15 Blazer, Jimmy,	74	F450, F550 SD	Range Rover	99	Tacoma 4x2	103
Tahoe, Yukon	74	Ranger	Land Rover		Tundra	103
Trailblazer	74	Sportrac	Defender 90	99		
		Ford 4x4	Discovery	99		
		Bronco Full Size	Discovery II	99		
		Bronco II	Freelander	99		
		E250, E350, E450	Land Rover	99		
		Escape	Range Rover	99		
		Excursion				
		Expedition				
		Explorer				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Acura							
2.2 CL 1996-97							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
2.3 CL 1998-99							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
2.5 TL 1995-98							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
3.0 CL 1996-99							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Acura Continued							
3.2 CL 2001-03							
Front Camber				Front Caster			
-2° to +1-3/4°	39203	1	Left side adjustable control arm - Includes ball joint	OE Adjustment			Original Equipment Adjustment
-2° to +1-3/4°	39204	1	Right side adjustable control arm - Includes ball joint				
+1° to +4°	39207	1	Left side adjustable control arm - Includes ball joint				
+1° to +4°	39208	1	Right side adjustable control arm - Includes ball joint				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)
3.2 CL 2004							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)
3.2 TL 1996-98							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
3.2 TL 1999-02							
Front Camber				Front Caster			
-2° to +1-3/4°	39203	1	Left side adjustable control arm - Includes ball joint	OE Adjustment			Original Equipment Adjustment
-2° to +1-3/4°	39204	1	Right side adjustable control arm - Includes ball joint				
+1° to +4°	39207	1	Left side adjustable control arm - Includes ball joint				
+1° to +4°	39208	1	Right side adjustable control arm - Includes ball joint				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)
3.2 TL 2003							
Front Camber				Front Caster			
-2° to +1-3/4°	39203	1	Left side adjustable control arm - Includes ball joint	OE Adjustment			Original Equipment Adjustment
-2° to +1-3/4°	39204	1	Right side adjustable control arm - Includes ball joint				
+1° to +4°	39207	1	Left side adjustable control arm - Includes ball joint				
+1° to +4°	39208	1	Right side adjustable control arm - Includes ball joint				
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)
3.2 TL 2004-06							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)
3.5 RL 1996-02							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)
Tools and/or Misc Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Acura Continued							
3.5 RL 2003-06							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Integra 1986-89							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Integra 1990-93							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Integra 1994-01							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Engine Torque Damper	93023		The Stiffy™ ETD				
Suspension Kit	16006	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16006-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
Legend 1986-90							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Legend 1991-96							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
+3/4°	38930	2	Spacer and Bolt Kit	OE Adjustment			Original Equipment Adjustment
NSX 1991-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Acura Continued							
RSX Early 2002 (Base Model - Non Type S)							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93000		The Stiffy™ ETD				
Sway Bar End Link	84000	1	Front Sway End Links				
Suspension Kit	16012	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16007-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
RSX Late 2002-03 (Base Model - Non Type S)							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93000		The Stiffy™ ETD				
Sway Bar End Link	84000	1	Front Sway End Links				
Suspension Kit	16007	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16007-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
RSX 2004-06 (Base Model - Non Type S)							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Sway Bar End Link	84000	1	Front Sway End Links				
Engine Torque Damper	93000		The Stiffy™ ETD				
RSX Early 2002 Type-S							
Front Camber				Front Caster			
± 2°	I-81260	2	Adj. Strut Bolt - VIN # 2C003183 and prior	--	na		No Adjustment Available
± 1°	35420	2	Adj. Strut Bolt - VIN # 2C003183 and prior				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93000		The Stiffy™ ETD				
RSX Late 2002-04 Type-S							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93000		The Stiffy™ ETD				
RSX 2005-06 Type-S							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93030		The Stiffy™ ETD				
TSX 2004-06							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35590	2	Adjustable Ball Joint	--	na		No Adjustment Available
+1-1/2° to +3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Vigor 1992-94							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35598	2	Adjustable Ball Joint				
+1-1/2° to +3°	35599	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
AMC							
Concord 1980-83							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Eagle 1980-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Audi							
100 1970-77							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
100 1989-94							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
100 Quattro 4wd 1989-94							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
200 1989-91							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
200 Quattro 4wd 1989-91							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
4000 2wd 1980-87							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
4000 4wd Quattro 1984-87							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
5000 2wd 1978-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
5000 4wd Quattro 1986-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Audi Continued							
80/90 1988-92							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
80/90 Quattro 1988-92							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
90 1993-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
90 Quattro 1992-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
A4 1996-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
A4 Quattro 1996-97							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
A6 1995-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
A6 Quattro 1995-97							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
A8 1996-06							
Front Camber				Front Caster			
OE Adjustment			Adjustable Cradle - Contact Dealer	OE Adjustment			Adjustable Cradle - Contact Dealer
Rear Camber				Rear Toe			
OE Adjustment			Adjustable Cradle - Contact Dealer	OE Adjustment			Adjustable Cradle - Contact Dealer
Cabriolet 1994-98							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Fox 1973-79							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
GT Coupe 1984-87							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Audi Continued							
Quattro 1982-91							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Quattro V-8 1990-94							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
S4 1992-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
S6 1992-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
TT FWD & AWD-Quattro 2000-06							
Front Camber				Front Caster			
± 1-1/4°	35655	2	Adjustable Ball Joint Mount	--	na		No Adjustment Available
Rear Camber				Rear Toe			
.13°	31520	2	Rear Wheel Camber Shim	+ .50°	31530	2	Rear Wheel Toe Shims
.25°	31521	2	Rear Wheel Camber Shim	+1.00°	31531	2	Rear Wheel Toe Shims
.38°	31522	2	Rear Wheel Camber Shim	-.50°	31532	2	Rear Wheel Toe Shims
.50°	31523	2	Rear Wheel Camber Shim	-1.00°	31533	2	Rear Wheel Toe Shims
BMW							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Buick							
Apollo 1975-77							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Century FWD 1982-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Century FWD 1997-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Century RWD 1974-82							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Buick Continued							
Electra FWD 1985-90							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim				
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim				
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
Estate Wagon 1978-90							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
LaCrosse 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
LeSabre FWD 1985-99							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim				
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim				
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
LeSabre FWD 2000-04							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
1/4°	31901	2	Full Contact Rear Camber/Toe Shim	1/4°	31901	2	Full Contact Rear Camber/Toe Shim
1/2°	31902	2	Full Contact Rear Camber/Toe Shim	1/2°	31902	2	Full Contact Rear Camber/Toe Shim
3/4°	31903	2	Full Contact Rear Camber/Toe Shim	3/4°	31903	2	Full Contact Rear Camber/Toe Shim
1°	31904	2	Non adjustable/No adjustment needed	1°	31904	2	Non adjustable/No adjustment needed
LeSabre RWD 1978-85							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Lucerne 2006							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Buick Continued							
Park Ave FWD 1985-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Park Ave FWD 1997-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Reatta 1988-91							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Regal 1997-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	± 2°	38510	2	Adjustable Lower Control Arms
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2°	38510	2	Adjustable Lower Control Arms				
Regal FWD 1988-96							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Regal RWD 1978-88							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Riviera 1979-85							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
Riviera 1986-94							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Riviera 1995-99							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Buick Continued							
Roadmaster 1991-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Skyhawk FWD 1982-89							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Skylark FWD 1980-95							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Skylark FWD 1996-98							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Skylark RWD 1978-79							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Somerset 1985-87							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Terraza FWD 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Buick Continued							
Terraza AWD 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Cadillac							
Allante 1987-92							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Allante 1993							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Catera 1997-01							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Cimarron 1982-88							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
CTS/CTS-V 2003-06							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for OE Adjustment Instruction	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment	--		Contact Dealer for OE Adjustment Instruction	OE Adjustment			Original Equipment Adjustment
Deville FWD 1985-93							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Deville RWD 1977-84							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
DTS 2006							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Cadillac							
Deville/Concours 1994-05							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
1/4°	31901	2	Full Contact Rear Camber/Toe Shim	1/4°	31901	2	Full Contact Rear Camber/Toe Shim
1/2°	31902	2	Full Contact Rear Camber/Toe Shim	1/2°	31902	2	Full Contact Rear Camber/Toe Shim
3/4°	31903	2	Full Contact Rear Camber/Toe Shim	3/4°	31903	2	Full Contact Rear Camber/Toe Shim
1°	31904	2	Non adjustable/No adjustment needed	1°	31904	2	Non adjustable/No adjustment needed
Eldorado 1979-85							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Eldorado 1986-03							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Fleetwood FWD 1985-93							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Fleetwood RWD 1977-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Seville 1977-79							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Seville 1986-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Seville/Seville STS 1997-04							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
1/4°	31901	2	Full Contact Rear Camber/Toe Shim	1/4°	31901	2	Full Contact Rear Camber/Toe Shim
1/2°	31902	2	Full Contact Rear Camber/Toe Shim	1/2°	31902	2	Full Contact Rear Camber/Toe Shim
3/4°	31903	2	Full Contact Rear Camber/Toe Shim	3/4°	31903	2	Full Contact Rear Camber/Toe Shim
1°	31904	2	Non adjustable/No adjustment needed	1°	31904	2	Non adjustable/No adjustment needed
STS 2005-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet							
Astro/Safari 2wd 1985-06							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
Tool	92620		Camber/Caster Upper Arm Adjusting Wrench				
Tool	92625		Camber/Caster Upper Arm Adjusting Wrench				
Tool	92630		Camber/Caster Upper Arm Adjusting Wrench				
Astro/Safari 4wd 1985-06							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
Aveo 2004-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Beretta 1987-95							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Beretta 1996							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
Cobalt SS 2005-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
Engine Torque Damper							
	93040		The Stiff™ ETD				
Camaro 1982-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Camaro 1993-02							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Caprice 1978-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84950	1	Replacement Steering Coupler				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet							
Cavalier 1982-94							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Cavalier 1995-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Celebrity 1982-90							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Chevette 1977-87							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Citation 1980-85							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Corsica 1987-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
Corvette 1963-82							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	34500	1	Torque Arm Shim 1/32"				
--	34510	1	Torque Arm Shim 1/16"				
--	34520	1	Torque Arm Shim 1/8"				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet Continued							
Corvette 1984-06							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Equinox FWD/AWD 2005							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
HHR 2006							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
Impala & Impala SS 1978-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Impala 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	± 2°	38510	2	Adjustable Lower Control Arms
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2°	38510	2	Adjustable Lower Control Arms				
Lumina 1990-96							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Lumina 1997-01							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Lumina APV 1990-96							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Malibu 1978-86							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Malibu 1997-03							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet Continued							
Malibu 2004-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Metro 1998-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Monte Carlo 1978-88							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Monte Carlo 1995-99							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Monte Carlo 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	± 2°	38510	2	Adjustable Lower Control Arms
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2°	38510	2	Adjustable Lower Control Arms				
Nova FWD 1985-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim				
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
Prizm 1998-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
Spectrum 1985-89							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Uplander FWD/AWD 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet Continued							
Venture 1997-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
Venture AWD 2002-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Chrysler							
300M 1999-04							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38180	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	37150	2	Replacement Toe Adjusting Sleeve				
Tool	92655		Sleeve Adjusting Tool				
300M 2005							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Cirrus 1995-00							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35622	2	Adjustable Ball Joint	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Concorde 1993-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38150	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38170	2	SmartArm™ Adjustable Link (Rubber)				
Tools and/or Misc. Parts							
	92650		Camber/Caster Upper Arm Adjusting Wrench				
Concorde 1998-04							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38180	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	37150	2	Replacement Toe Adjusting Sleeve				
Tool	92655		Sleeve Adjusting Tool				
Conquest 1987-89							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Cordoba 1980-83							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Crossfire 2004-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
E-Class 1983-87							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chrysler Continued							
Executive 1984-86							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Fifth Ave 1990-93							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Imperial 1990-93							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Laser 1984-86							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
LeBaron 1982-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
LHS 1994-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38150	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38170	2	SmartArm™ Adjustable Link (Rubber)				
Tools and/or Misc. Parts							
	92650		Camber/Caster Upper Arm Adjusting Wrench				
LHS 1998-02							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38180	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	37150	2	Replacement Toe Adjusting Sleeve				
Tool	92655		Sleeve Adjusting Tool				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chrysler Continued							
New Yorker FWD 1983							
Front Camber				Front Caster			
± 2-1/2°	35200	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
New Yorker FWD 1984-93							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
New Yorker FWD 1994-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38150	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38170	2	SmartArm™ Adjustable Link (Rubber)				
Tools and/or Misc. Parts							
	92650		Camber/Caster Upper Arm Adjusting Wrench				
New Yorker FWD 1998-00							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38180	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Newport 1978-89							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
PT Cruiser 2001-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
Pacifica AWD/FWD 2004-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Sebring 2dr 2001-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Sebring Conv. 1996-04							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35622	2	Adjustable Ball Joint	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chrysler Continued							
Sebring/Exc. Conv. 1995-00							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35622	2	Adjustable Ball Joint	--	na		No Adjustment Available
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings				
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Town & Country (ex. MiniVan) 1984-88							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Town & Country 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
Town & Country 1996-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim
Town & Country AWD 1997-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Town & Country AWD w/ABS 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Town & Country AWD w/o ABS 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Daewoo							
Leganza 1999-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Nubira 1999-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Daihatsu							
Charade 1988-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Charade GTX 1993-95							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Dodge							
600 1984-88							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Aries 1984-89							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Avenger 1995-00							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35620	2	Adjustable Ball Joint				
+1-1/2° to +3°	35621	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge Continued							
Caravan 1984-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
Caravan 2wd 1996-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim
Caravan AWD 1997-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Caravan AWD w/ABS 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Caravan AWD w/o ABS 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim
Challenger 1980-83							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Charger 1982-83							
Front Camber				Front Caster			
± 2-1/2°	35200	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Charger 1984-87							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Colt FWD 1979-84							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge Continued							
Colt FWD 1985-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Colt Vista 2wd 1984-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Colt Vista 4wd 1986-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Colt Wagon 2wd 1989-90							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Colt Wagon 4wd 1989-90							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Conquest 1984-86							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Daytona 1984-94							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Diplomat 1978-89							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Dynasty 1988-94							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Intrepid 1993-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38150	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38170	2	SmartArm™ Adjustable Link (Rubber)				
Tools and/or Misc. Parts							
	92650		Camber/Caster Upper Arm Adjusting Wrench				
Intrepid 1998-04							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38180	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	37150	2	Replacement Toe Adjusting Sleeve				
Tool	92655		Sleeve Adjusting Tool				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge Continued							
Lancer 1985-89							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Magnum 2005-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Mini Ram Van 1984-88							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
Monaco 1990-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Neon 1995-05							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Omni 1980-90							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Shadow 1987-94							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge Continued							
Spirit 1989-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Stealth 1991-97							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Stratus 1995-00							
Front Camber				Front Caster			
-1-1/2° to +1-1/2°	35622	2	Adjustable Ball Joint	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Stratus 2001-06							
Front Camber				Front Caster			
±2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
±1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Stratus 4dr 2001-06							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35622	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Viper 1993-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Eagle							
Medallion 1988-89							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Premier 1988-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Eagle Summit							
Summit 1989-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Summit 1993-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Summit Wagon 1992-96							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Talon AWD 1990-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38420	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Talon AWD 1995-98							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35620	2	Adjustable Ball Joint				
-1-1/2° to +3°	35621	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Talon FWD 1990-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Talon FWD 1995-98							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35620	2	Adjustable Ball Joint				
-1-1/2° to +3°	35621	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Vision 1993-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1°	38150	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38170	2	SmartArm™ Adjustable Link (Rubber)				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Fiat							
124 1973-75							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
128 Coupe 1973-78							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
128 Hatchback 1973-78							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
128 Sedan 1973-79							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
128 Wagon 1973-79							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
131 1975-78							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Brava 1979-82							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Spyder 1979-82							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Ford							
Aerostar 1986-97							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Aspire 1994-97							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford Continued							
Contour 1995-00							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Crown Victoria 1980-91							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Crown Victoria 1992-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Escort 1981-85							
Front Camber				Front Caster			
± 1°	36700	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Escort 1986-90							
Front Camber				Front Caster			
± 1°	36800	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Escort 1991-96							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	± 2°	38200	2	SmartArm™ Adjustable Link (Polyurethane)
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt	± 2°	38220	2	SmartArm™ Adjustable Link (Rubber)
Escort 1997-04							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
EXP 1982-85							
Front Camber				Front Caster			
± 1°	36700	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
EXP 1986-88							
Front Camber				Front Caster			
± 1°	36800	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Fairmont 1978-83							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84950	1	Replacement Steering Coupler				
Festiva 1987-93							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Fiesta 1978-80							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford Continued							
Five Hundred FWD/AWD 2005							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Freestar 2004-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Freestyle FWD/AWD 2005							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Focus 2000-04							
Front Camber				Front Caster			
± 1°	36350	2	Adjustable Front Camber Plates	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1°	81310	2	Fastcam™ 12mm Camber Adjusting Bolt				
± 1/2° to 1°	36400	2	Rear Camber Shim Kit	--	na		No Adjustment Available
Engine Torque Damper	93028		The Stiffy™ ETD				
Suspension Kit	16008	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16008-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
Granada 1975-80							
Front Camber				Front Caster			
± 1-1/4°	35300	2	Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84951	1	Replacement Steering Coupler				
Granada 1981-82							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84950	1	Replacement Steering Coupler				
LTD 1979-82							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84950	1	Replacement Steering Coupler				
LTD 1983-86							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
LTD Wagon 1983-86							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mustang 1979-93							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mustang 1994-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford Continued							
Mustang 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Engine Torque Damper	93032		The Stiffy™ ETD (must be used with 93302	Lower Cradle Brace			
Brake Line Kit	17000	1	Complete Steel Braided Brake Line Kit				
Suspension Kit	16009	1	See Kit Section For Complete Description				
Spring Kit	16009-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
Suspension Components							
	38525	1	Adjustable Rear Lower Control Arms				
	84215	1	OE Style Replacement Ball Joint				
	84217	1	Roll Center Correction Ball joint				
	93200	1	Front and Rear Sway Bars with Mounting Hardware				
	93300	1	Rear Shock Tower Brace				
	93301	1	Front Strut Tower Brace				
	93302	1	Lower Cradle Brace				
	93305	1	Rear Traction Kit (Panhard Bar & Rear Arms)				
	93306	1	Adjustable Rear Pan Hard Bar				
Probe 1989-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Probe 1993-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Taurus Sedan 1986-89							
Front Camber				Front Caster			
± 1°	36750	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings	± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings
Taurus Sedan 1990-95							
Front Camber				Front Caster			
± 1°	36760	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings	± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings
Taurus Sedan 1996-06							
Front Camber				Front Caster			
+1-1/4°	36250	2	Adjustable Front Camber Plates	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings	± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings
Taurus Wagon 1986-89							
Front Camber				Front Caster			
± 1°	36750	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	± 1-1/2°	37050	2	Rear Toe Eccentric Bushings
Taurus Wagon 1990-95							
Front Camber				Front Caster			
± 1°	36750	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	± 1-1/2°	37050	2	Rear Toe Eccentric Bushings
Taurus Wagon 1996-05							
Front Camber				Front Caster			
+1-1/4°	36250	2	Adjustable Front Camber Plates	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	OE Adjustment			Original Equipment Adjustment
Tempo 1986-94							
Front Camber				Front Caster			
± 1°	36800	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Thunderbird 1980-88							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford Continued							
Thunderbird 1989-97							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Thunderbird 2002-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Windstar 1995-03							
Front Camber				Front Caster			
+1-1/4°	36260	2	Adjustable Front Camber Plates	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
ZX2 2000-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Geo							
Metro 1989-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Prizm 1989-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Storm 1990-93							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Honda							
Accord 1982-85							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Accord 1986-89							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
-2° to +3°	38600	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38620	2	SmartArm™ Adjustable Link (Rubber)				
Accord 1990-97							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35594	2	Adjustable Ball Joint				
+1-1/2° to +3°	35595	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Rear Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Honda Continued							
Accord 1998-02							
Front Camber				Front Caster			
-2° to +1-3/4°	39203	1	Left side adjustable control arm - Includes ball joint	--	na		No Adjustment Available
-2° to +1-3/4°	39204	1	Right side adjustable control arm - Includes ball joint				
+1° to +4°	39207	1	Left side adjustable control arm - Includes ball joint				
+1° to +4°	39208	1	Right side adjustable control arm - Includes ball joint				
± 1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to 3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38720	2	SmartArm™ Adjustable Link (Rubber)
Engine Torque Damper	93041		The Stiffy™ ETD				
Suspension Kit	16001	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16001-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
Tools and/or Misc. Parts							
--	84200	2	Front Upper OE Replacement Ball Joint - Non-Adjustable				
Accord 2003-06							
Front Camber				Front Caster			
± 1-1/2°	35590	2	Adjustable Ball Joint	--	na		No Adjustment Available
+1-1/2° to 3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)	-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)
Engine Torque Damper	93041		The Stiffy™ ETD				
Suspension Kit	16000	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16000-1	1	Set of 4 Springs, lowers the car 1.6" (40mm)				
Accord Wagon 1990-93							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Accord Wagon 1990-93							
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Accord Wagon 1994-96							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
Rear Camber				Rear Toe			
-2° to +3°	38811	2	SmartArm™ Adjustable LH Link (Poly)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38812	2	SmartArm™ Adjustable RH Link (Poly)				
-2° to +3°	38831	2	SmartArm™ Adjustable LH Link (Rubber)				
-2° to +3°	38832	2	SmartArm™ Adjustable RH Link (Rubber)				
+3/4°	38940	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Accord Wagon 1997							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Civic 1980-87							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Honda Continued							
Civic 1988-91							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to 3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Civic 1992-93							
Front Camber				Front Caster			
± 3°	39250	1	Adjustable Control Arm Set	--	na		No Adjustment Available
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings				
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to 3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Engine Torque Damper			93021	The Stiffy™ ETD			
Suspension Kit			16002	Complete with Springs, Stiffy™, & Camber Kits			
Spring Kit			16002-1	Set of 4 Springs, lowers the car 1.4" (35mm)			
Tools and/or Misc. Parts							
--	84200	2	Front Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Civic 1992-95							
Front Camber				Front Caster			
± 3°	39250	2	Adjustable Control Arm Set	--	na		No Adjustment Available
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings				
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to 3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Engine Torque Damper			93023	The Stiffy™ ETD			
Suspension Kit			16002	Complete with Springs, Stiffy™, & Camber Kits			
Spring Kit			16002-1	Set of 4 Springs, lowers the car 1.4" (35mm)			
Tools and/or Misc. Parts							
--	84200	2	Front Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Civic 1996-00							
Front Camber				Front Caster			
-1° to +4°	39100	2	Rubber Bushing Control Arm w/o Ball Joint	--	na		No Adjustment Available
-1° to +4°	39101	1	LH Control Arm-Rubber Bushings & Ball Joint				
-1° to +4°	39102	1	RH Control Arm-Rubber Bushings & Ball Joint				
-1° to +4°	39103	1	Poly Bushing Control Arm w/o Ball Joint				
-1° to +4°	39104	1	LH Control Arm w/Poly Bushings & Ball Joint				
-1° to +4°	39105	1	RH Control Arm w/Poly Bushings & Ball Joint				
± 1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to 3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Engine Torque Damper			93020	The Stiffy™ ETD			
Suspension Kit			16003	Complete with Springs, Stiffy™, & Camber Kits			
Spring Kit			16003-1	Set of 4 Springs, lowers the car 1.4" (35mm)			
Tools and/or Misc. Parts							
--	84200	2	Front Upper OE Replacement Ball Joint - Non-Adjustable				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Honda Continued							
Civic 2001 & Early 2002 Models (except SI model)							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93026		The Stiffy™ ETD				
Suspension Kit	16004	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16004-1	1	Set of 4 Springs, lowers the car 1.4" (35mm)				
Civic Late 2002-05 (except SI models)							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93026		The Stiffy™ ETD				
Suspension Kit	16011	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16004-1	1	Set of 4 Springs, lowers the car 1.4" (35mm)				
Civic SI 2002-05							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38950	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38970	2	SmartArm™ Adjustable Link (Rubber)				
Engine Torque Damper	93022		The Stiffy™ ETD				
Sway Bar	84000	1	Front Sway Bar End Links				
Suspension Kit	16005	1	Complete with Springs, Stiffy™, & Camber Kits				
Spring Kit	16004-1	1	Set of 4 Springs, lowers the car 1.4" (35mm)				
Civic 2006							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
CRX 1984-87							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
CRX 1988-92							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to 3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Del Sol 1993-97							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to 3°	35593	2	Adjustable Ball Joint				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Honda Continued							
Del Sol 1993-97							
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
+3/4°	38930	2	Spacer and Bolt Kit				
Tools and/or Misc. Parts							
--	84200	2	Front Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
EV+ 1998							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Insight 2001-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Odyssey 1995-98							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
± 1-1/2°	35590	2	Adjustable Ball Joint				
+1-1/2° to 3°	35591	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Odyssey 1999-02							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Odyssey 2003-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-1-1/2° to +3°	38725	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Pilot 2003							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Prelude 1979-82							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
Prelude 1983-87							
Front Camber				Front Caster			
-1° to +3°	35640	2	Camber Adjusting Control Arm Kit	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Prelude 1988-91							
Front Camber				Front Caster			
-1° to +3°	35650	2	Camber Adjusting Control Arm Kit	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
-1° to +3°	35650	2	Camber Adjusting Control Arm Kit	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Honda Continued							
Prelude 1992-96							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
±1-1/2°	35598	2	Adjustable Ball Joint				
+1-1/2° to +3°	35599	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
±1-1/2°	35598	2	Adjustable Ball Joint				
+1-1/2° to +3°	35599	2	Adjustable Ball Joint				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Prelude non-SH model 1997-02							
Front Camber				Front Caster			
+1-3/4° to +4°	35580	2	Adjustable Ball Joint				
±1-1/2°	35592	2	Adjustable Ball Joint				
+1-1/2° to +3°	35593	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
±1-1/2°	35598	2	Adjustable Ball Joint				
+1-1/2° to +3°	35599	2	Adjustable Ball Joint				
Engine Torque Damper	93024		The Stiffy™ ETD				
Tools and/or Misc. Parts							
--	84200	2	Front Upper OE Replacement Ball Joint - Non-Adjustable				
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Prelude SH model 1997-02							
Front Camber				Front Caster			
±1-1/2°	35596	2	Adjustable Ball Joint				
+1-1/2° to +3°	35597	2	Adjustable Ball Joint				
Rear Camber				Rear Toe			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
±1-1/2°	35598	2	Adjustable Ball Joint				
+1-1/2° to +3°	35599	2	Adjustable Ball Joint				
Engine Torque Damper	93024		The Stiffy™ ETD				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
S2000 2000-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Hyundai							
Accent 1995-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Elantra 1992-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Hyundai Continued							
Excel 1986-89							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Excel 1990-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Pony 1983-87							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Scoupe 1991-95							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Sonata 1989-94							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Sonata 1995-98							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Sonata 1999-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Stellar 1984-86							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tiburon 1997-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Tiburon 2003-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
-1° to +3°	38540	2	Adjustable Camber/Toe Arms	-1° to +3°	38540	2	Adjustable Camber/Toe Arms
Suspension Components							
	38535	2	Adjustable Trailing Arm Kit				
Infiniti							
G20 1991-96							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
G20 1997-02							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
G35 2003-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Infiniti Continued							
I30 1996-01							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
I35 2002-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
J30 1993-97							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Q45 1990-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Isuzu							
I-Mark FWD 1985-89							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Isuzu Continued							
I-Mark RWD 1982-83							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
I-Mark RWD 1984-85							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Impulse 1983-87							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Impulse 1988-89							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Impulse 1990-93							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Oasis 1996-99							
Front Camber				Front Caster			
-3/4° to +1°	35700	2	Adjustable Mounts - Polyurethane Bushings	OE Adjustment			Original Equipment Adjustment
-3/4° to +1°	35710	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35660	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35720	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35730	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35670	2	Adjustable Mounts - Brass Bushings				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Stylus 1990-93							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Kia							
Optima 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rio 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
Sedona 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Sephia 1993-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Sephia 1998-00							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Sephia 2001-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Spectra 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Lexus							
ES250 1990-91							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
ES300/ES330/ES350 1992-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
GS300 1993-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
GS400/GS430 1998-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
IS300/IS300/IS350 2001-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Lexus Continued							
LS400/LS430 1990-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
SC300 1992-01							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
SC400/430 1992-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Lincoln							
Continental FWD 1984-94							
Front Camber				Front Caster			
Tool	92900	1	3/8" Spot Weld Cutter	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Continental FWD 1995-02							
Front Camber				Front Caster			
Tool	92900	1	3/8" Spot Weld Cutter	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Continental RWD 1982-87							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
LS 2000-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Mark VII 1984-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mark VIII 1993-98							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Town Car 1981-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mazda							
3/5/6 2004-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
323 1986-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
626 FWD (2 wheel steer) 1988-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mazda Continued							
626 FWD (4 wheel steer) 1988-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
626 FWD 1983-87							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
626 FWD 1993-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
929 1988-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
929 1992-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
GLC FWD 1981-85							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Miata 1990-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Millenia 1995-02							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
MPV 1989-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
MX-3 1992-95							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
MX-6 (2 wheel steer only) 1988-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
MX-6 (4 wheel steer only) 1988-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mazda Continued							
Protégé 1990-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
RX-7 1986-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
RX-7 1992-96							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
RX-8 2004-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Serenia 1992-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Mercedes Benz							
All Models							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Mercury							
Capri FWD 1991-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Capri RWD 1979-86							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Colony Park 1983-91							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Cougar 1980-88							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Cougar 1988-94							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Cougar 1995-02							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Grand Marquis 1983-94							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Grand Marquis 1995-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mercury Continued							
LN7 1981-83							
Front Camber				Front Caster			
± 1°	36700	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Lynx 1982-85							
Front Camber				Front Caster			
± 1°	36700	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Lynx 1986-87							
Front Camber				Front Caster			
± 1°	36800	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Marauder 2003-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Marquis 1983-86							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Marquis Wagon 1983-86							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Montego FWD/AWD 2005							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Monterey 2004-05							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mystique 1995-01							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Sable Sedan 1986-90							
Front Camber				Front Caster			
± 1°	36750	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings	± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings
Sable Sedan 1991-95							
Front Camber				Front Caster			
± 1°	36760	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings	± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings
Sable Sedan 1996-06							
Front Camber				Front Caster			
± 1°	36250	2	Camber Adjusting Strut Cap	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings	± 3/4°	37000	2	Rear Camber/Toe Eccentric Bushings
Sable Wagon 1986-90							
Front Camber				Front Caster			
± 1°	36750	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	± 1-1/2°	37050	2	Rear Toe Eccentric Bushings
Sable Wagon 1991-95							
Front Camber				Front Caster			
± 1°	36760	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	± 1-1/2°	37050	2	Rear Toe Eccentric Bushings
Sable Wagon 1996							
Front Camber				Front Caster			
± 1°	36250	2	Camber Adjusting Strut Cap	± 2°	38350	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mercury Continued							
Sable Wagon 1997-04							
Front Camber				Front Caster			
± 1°	36250	2	Camber Adjusting Strut Cap	Tool	92900	1	3/8" Spot Weld Cutter
Rear Camber				Rear Toe			
± 2-1/2°	35250	2	Camber Adjusting Control Arm Bolt	OE Adjustment			Original Equipment Adjustment
Topaz 1984-85							
Front Camber				Front Caster			
± 1°	36800	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Topaz 1986-94							
Front Camber				Front Caster			
± 1°	36800	2	Camber Adjusting Strut Cap	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Tracer 1988-90							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Tracer 1991-99							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	± 2°	38200	2	SmartArm™ Adjustable Link (Polyurethane)
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt	± 2°	38220	2	SmartArm™ Adjustable Link (Rubber)
Villager 1993-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
Zephyr 1978-83							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mitsubishi							
3000 GT 1991-99							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Cordia 1983-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Diamante 1992-96							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Diamante 1997-04							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mitsubishi Continued							
Eclipse 1990-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Eclipse 1995-99							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35620	2	Adjustable Ball Joints				
+1-1/2° to +3°	35621	2	Adjustable Ball Joints				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Eclipse 2000-05							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Eclipse 2000-05							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Eclipse 4wd 1990-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38420	2	SmartArm™ Adjustable Link (Rubber)				
Tools and/or Misc. Parts							
	84210	2	OE Replacement Rear Ball Joint				
Eclipse 4wd 1995-99							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
-1-1/2° to +1-1/2°	35620	2	Adjustable Ball Joints				
+1-1/2° to +3°	35621	2	Adjustable Ball Joints				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Expo 1992-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Galant 1985-93							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mitsubishi Continued							
Galant 1994-98							
Front Camber				Front Caster			
-3/4° to +1°	35750	2	Adjustable Mounts - Polyurethane Bushings	--	na		No Adjustment Available
-3/4° to +1°	35760	2	Adjustable Mounts - Rubber Bushings				
-3/4° to +1°	35680	2	Adjustable Mounts - Brass Bushings				
+1-1/4° to +3°	35770	2	Adjustable Mounts - Polyurethane Bushings				
+1-1/4° to +3°	35780	2	Adjustable Mounts - Rubber Bushings				
+1-1/4° to +3°	35690	2	Adjustable Mounts - Brass Bushings				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Tools and/or Misc. Parts							
--	35661	2	35660, 35670, 35680, 35690, Replacement Brass Bushings				
--	35701	2	35700, 35720, 35750, 35770, Replacement Polyurethane Bushings				
Galant 1999-03							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	35850	2	Camber Adjusting Control Arm Mounts	OE Adjustment			Original Equipment Adjustment
-1° to +3°	35860	2	Camber Adjusting Control Arm Mounts				
± 1°	35870	2	Bolt and Spacer Kit				
Galant 2004-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Galant 4wd 1990-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38420	2	SmartArm™ Adjustable Link (Rubber)				
Lancer/EVO 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Engine Torque Damper	93025		The Stiff™ ETD				
Mirage 1985-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mirage 1993-03							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Precis 1987-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tredia 1983-89							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Nissan							
200SX 1995-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
240SX 1989-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Nissan Continued							
300ZX 1990-95							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
350Z 2003-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Altima 1993-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Altima 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Axxess 1990-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Maxima 1985-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	38250	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38270	2	SmartArm™ Adjustable Link (Rubber)				
Maxima 1995-03							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Maxima 2004-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
NX 1991-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Pulsar 1983-86							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Pulsar 1987-90							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Quest 1993-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Nissan Continued							
Quest 2004-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolts				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Sentra 1983-90							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Sentra 1991-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	38150	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38170	2	SmartArm™ Adjustable Link (Rubber)				
Sentra 1995-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Stanza 1983-86							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Stanza 1987-92							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1°	38300	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
± 1°	38320	2	SmartArm™ Adjustable Link (Rubber)				
Stanza 4wd Wagon 1985-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Stanza Wagon 1985-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Van 1987-90							
Front Camber				Front Caster			
--	25100	1	Nissan Camber/Caster Shims 1mm thick	--	25100	2	Nissan Camber/Caster Shims 1mm thick
--	25200	1	Nissan Camber/Caster Shims 2mm thick	--	25200	1	Nissan Camber/Caster Shims 2mm thick
--	25400	1	Nissan Camber/Caster Shims 4mm thick	--	25400	1	Nissan Camber/Caster Shims 4mm thick
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Oldsmobile							
Regency FWD 1997-98							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
88 1978-85							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Oldsmobile Continued							
88 1986-99							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	OE Adjustment			Original Equipment Adjustment
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim				
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim				
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
98 Regency FWD 1985-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
98 Regency RWD 1978-84							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Achieva 1992-95							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Achieva 1996-98							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Alero 1990-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Aurora 1995-00							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Oldsmobile Continued							
Aurora 2001-03							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
1/4°	31901	2	Full Contact Rear Camber/Toe Shim	1/4°	31901	2	Full Contact Rear Camber/Toe Shim
1/2°	31902	2	Full Contact Rear Camber/Toe Shim	1/2°	31902	2	Full Contact Rear Camber/Toe Shim
3/4°	31903	2	Full Contact Rear Camber/Toe Shim	3/4°	31903	2	Full Contact Rear Camber/Toe Shim
1°	31904	2	Full Contact Rear Camber/Toe Shim	1°	31904	2	Full Contact Rear Camber/Toe Shim
Calais 1985-91							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Ciera 1982-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Custom Cruiser 1990-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Cutlass 1997-99							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 15mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Cutlass Cruiser 1993-94							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Oldsmobile Continued							
Cutlass RWD 1978-88							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Cutlass Supreme FWD 1988-97							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Cutlass Supreme RWD 1978-88							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Firenza 1982-88							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Intrique 1998-02							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
LSS 1997-98							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Omega 1981-84							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Oldsmobile Continued							
Silhouette 1990-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Silhouette 1997-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Toronado 1966-78							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Toronado 1979-85							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Toronado 1986-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Trofeo 1987-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Plymouth							
Acclaim 1989-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Breeze 1996-00							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Plymouth Continued							
Caravelle FWD 1985-88							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Duster 1987-94							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
Horizon 1978-83							
Front Camber				Front Caster			
± 2-1/2°	35200	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
Horizon 1984-90							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
Laser 1.8L 1990-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Laser 2.0 1990-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Laser 4wd 1992-94							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38420	2	SmartArm™ Adjustable Link (Rubber)	OE Adjustment			Original Equipment Adjustment
Neon 1995-01							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Prowler 1997-01							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Reliant 1981-83							
Front Camber				Front Caster			
± 2-1/2°	35200	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Plymouth Continued							
Turismo 1980-83							
Front Camber				Front Caster			
± 2-1/2°	35200	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Turismo 1984-87							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Voyager 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30300	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31101	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31102	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31103	2	Full Contact Rear Camber/Toe Shim
± 1°	31104	2	Full Contact Rear Camber/Toe Shim	± 1°	31104	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31105	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31106	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32200	2	Adjustable Full Contact Camber/Toe Shim
Voyager 1996-01							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim
Voyager AWD 1997-01							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Voyager AWD w/ABS 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Voyager AWD w/o ABS 1990-95							
Front Camber				Front Caster			
± 2-1/2°	35220	2	Camber Adjusting Strut Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Pontiac							
6000 1982-91							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
6000 4wd 1989-90							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Bonneville FWD 1987-99							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	OE Adjustment			Original Equipment Adjustment
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim				
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim				
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
Bonneville FWD 2000-04							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
1/4°	31901	2	Full Contact Rear Camber/Toe Shim	1/4°	31901	2	Full Contact Rear Camber/Toe Shim
1/2°	31902	2	Full Contact Rear Camber/Toe Shim	1/2°	31902	2	Full Contact Rear Camber/Toe Shim
3/4°	31903	2	Full Contact Rear Camber/Toe Shim	3/4°	31903	2	Full Contact Rear Camber/Toe Shim
1°	31904	2	Full Contact Rear Camber/Toe Shim	1°	31904	2	Full Contact Rear Camber/Toe Shim
Bonneville RWD 1983-86							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Fiero 1984-87							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Fiero 1988							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Pontiac Continued							
Firebird-TA 1982-92							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Firebird-TA 1993-02							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Firefly 1985-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
G6 2005-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Grand Am 1985-95							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Grand Am 1996-98							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Grand Am 1999-03							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Grand Am 2004-05							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Grand Prix 1978-87							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Pontiac Continued							
Grand Prix 1988-96							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Grand Prix 1997-99							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Grand Prix 2000-03							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	±2°	38545	2	Adjustable Lower Control Arms
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
±2°	38545	2	Adjustable Lower Control Arms				
Grand Prix 2004-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
GTO 2004							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Engine Torque Damper							
93031							
GTO 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
J2000 1982-84							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Montana FWD 1997-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Montana AWD 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Pontiac Continued							
Phoenix 1980-84							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Soltice 2006							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Sunbird 1983-94							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Sunburst 1985-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Sunfire 1995-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30100	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Torrent 2006							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Transport 1990-96							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
±2-1/4°	35100	2	Adjusting Bolt for slotted struts with fence				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Pontiac Continued							
Transport 1997-98							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30200	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Vibe AWD 2003-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Vibe FWD 2003-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31501	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31501	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31502	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31502	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31503	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31503	2	Full Contact Rear Camber/Toe Shim
± 1°	31504	2	Full Contact Rear Camber/Toe Shim	± 1°	31504	2	Full Contact Rear Camber/Toe Shim
Porsche							
911, 928, 968, Boxster							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
924 1977-82 924S 1987-88 944 1983-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Renault							
Alliance 1983-87							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Encore 1984-87							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
GTA 1987							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Saab							
900 excluding convertible 1994-98							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
900 including convertible 1979-94							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
9000 1986-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Saab Continued							
9³ 1999-02							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
9³ 2003-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
9⁵ 2000-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
99 1975-80							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Saturn							
Ion 2003-04							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Saturn							
ION 2005-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
L-Series 2000-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
L-Series 2003-05							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
S-Series 1991-02							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Relay AWD/FWD 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Vue 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Scion							
TC 2005-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Engine Torque Damper	93027		The Stiffy™ ETD				
Brake Line Kit	17001	1	Steel Braided Brake Line Kit				
Clutch Line Kit	17002	1	Steel Braided Clutch Line Kit				
Suspension	93304	1	Rear Shock Tower Brace				
Xa & Xb 2004							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Subaru							
All 1980-94 except below							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	± 2-1/4°	38100	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
B9 Tribeca 2006							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Baja 2003-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Forester 1998-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Impreza/Outback 1993-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Justy 1987-94							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Legacy 1990-99							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Legacy 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Outback 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
SVX 1992-97							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Subaru Continued							
WRX 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
PowerStick	93180		Rubber Bushing PowerStick™ ETD				
PowerStick	93181		Polyurethane Bushing PowerStick™ ETD				
Suzuki							
Aerio/Aerio SX 2003-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Esteem 1995-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Reno 2005-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Swift 1989-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Verona 2004-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Toyota							
Avalon 1995-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	OE Adjustment			Original Equipment Adjustment
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
Camry 1983-86							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	34600	1	Front Caster Shims
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Camry 1987-91							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	34600	1	Front Caster Shims
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Camry 1992-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Toyota Continued							
Camry Wagon 1987-91							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	34600	1	Front Caster Shims
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Camry Wagon 1992-97							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	34600	1	Front Caster Shims
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Celica 1986-99							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Celica 2000-05							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Corolla RWD 1980-87							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Corolla 4wd 1988-90							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Corolla All Trac 1988-92							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Corolla FWD 1984-87							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
Corolla FWD 1988-92							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt	± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim
± 1/4°	31301	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31302	2	Full Contact Rear Camber/Toe Shim	± 1°	31304	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31303	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim
± 1°	31304	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31305	2	Full Contact Rear Camber/Toe Shim	0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim
± 1-1/2°	31306	2	Full Contact Rear Camber/Toe Shim	OE Adjustment			Original Equipment Adjustment
0° to 1-1/2°	32400	2	Adjustable Full Contact Camber/Toe Shim				
Corolla FWD 1993-02							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Toyota Continued							
Corolla FWD 2003-04							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1/4°	31501	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31501	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31502	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31502	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31503	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31503	2	Full Contact Rear Camber/Toe Shim
± 1°	31504	2	Full Contact Rear Camber/Toe Shim	± 1°	31504	2	Full Contact Rear Camber/Toe Shim
Cressida 1989-92							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	34600	1	Front Caster Shims
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Echo 2000-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Matrix AWD 2003-06							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Matrix FWD 2003-06							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
1/4°	31501	2	Full Contact Rear Camber/Toe Shim	1/4°	31501	2	Full Contact Rear Camber/Toe Shim
1/2°	31502	2	Full Contact Rear Camber/Toe Shim	1/2°	31502	2	Full Contact Rear Camber/Toe Shim
3/4°	31053	2	Full Contact Rear Camber/Toe Shim	3/4°	31053	2	Full Contact Rear Camber/Toe Shim
1°	31054	2	Full Contact Rear Camber/Toe Shim	1°	31054	2	Full Contact Rear Camber/Toe Shim
MR2 1985-90							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
MR2 1991-97							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
MR2 Spyder 2000-04							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Paseo 1992-97							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Previa 1991-97							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
± 2-1/2°	35150	2	Adjusting Bolt for slotted struts without fence				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Prius 2001-06							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Sienna 1998-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31121	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31122	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31123	2	Full Contact Rear Camber/Toe Shim
± 1°	31124	2	Full Contact Rear Camber/Toe Shim	± 1°	31124	2	Full Contact Rear Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Toyota Continued							
Sienna 2004							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Solara 1999-01							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Supra 1986-98							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Tercel 1983-86							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment		34600	1	Front Caster Shims
Rear Camber				Rear Toe			
± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31201	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31202	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31203	2	Full Contact Rear Camber/Toe Shim
± 1°	31204	2	Full Contact Rear Camber/Toe Shim	± 1°	31204	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31205	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31206	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32300	2	Adjustable Full Contact Camber/Toe Shim
Tercel 1987-98							
Front Camber				Front Caster			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tercel 2wd Wagon 1983-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	34600	1	Front Caster Shims
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Tercel 4wd Wagon 1983-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	34600	1	Front Caster Shims
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Van 2wd 1984-89							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Van 4wd 1987-89							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Volkswagen							
Beetle 1999-06							
Front Camber				Front Caster			
± 1-1/4°	35655	2	Adjustable Ball Joint Mount	--	na		No Adjustment Available
Rear Camber				Rear Toe			
.13°	31520	2	Rear Wheel Camber Shim	+ .50°	31530	2	Rear Wheel Toe Shims
.25°	31521	2	Rear Wheel Camber Shim	+1.00°	31531	2	Rear Wheel Toe Shims
.38°	31522	2	Rear Wheel Camber Shim	-.50°	31532	2	Rear Wheel Toe Shims
.50°	31523	2	Rear Wheel Camber Shim	-1.00°	31533	2	Rear Wheel Toe Shims
Cabrio 1995-02							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
Cabriolet 1985-00							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Volkswagen Continued							
EuroVan 1993-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Fox 1987-93							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Fox Wagon 1987-90							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
Golf 1985-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Golf 1999-06							
Front Camber				Front Caster			
± 1-1/4°	35655	2	Adjustable Ball Joint Mount	--	na		No Adjustment Available
Rear Camber				Rear Toe			
.13°	31520	2	Rear Wheel Camber Shim	+ .50°	31530	2	Rear Wheel Toe Shims
.25°	31521	2	Rear Wheel Camber Shim	+1.00°	31531	2	Rear Wheel Toe Shims
.38°	31522	2	Rear Wheel Camber Shim	- .50°	31532	2	Rear Wheel Toe Shims
.50°	31523	2	Rear Wheel Camber Shim	-1.00°	31533	2	Rear Wheel Toe Shims
GTI 1999-06							
Front Camber				Front Caster			
± 1-1/4°	35655	2	Adjustable Ball Joint Mount	--	na		No Adjustment Available
Rear Camber				Rear Toe			
.13°	31520	2	Rear Wheel Camber Shim	+ .50°	31530	2	Rear Wheel Toe Shims
.25°	31521	2	Rear Wheel Camber Shim	+1.00°	31531	2	Rear Wheel Toe Shims
.38°	31522	2	Rear Wheel Camber Shim	- .50°	31532	2	Rear Wheel Toe Shims
.50°	31523	2	Rear Wheel Camber Shim	-1.00°	31533	2	Rear Wheel Toe Shims
GTI 1985-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Jetta 1979-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Volkswagen Continued							
Jetta 1999-05							
Front Camber				Front Caster			
± 1-1/4°	35655	2	Adjustable Ball Joint Mount	--	na		No Adjustment Available
Rear Camber				Rear Toe			
.13°	31520	2	Rear Wheel Camber Shim	+ .50°	31530	2	Rear Wheel Toe Shims
.25°	31521	2	Rear Wheel Camber Shim	+1.00°	31531	2	Rear Wheel Toe Shims
.38°	31522	2	Rear Wheel Camber Shim	-.50°	31532	2	Rear Wheel Toe Shims
.50°	31523	2	Rear Wheel Camber Shim	-1.00°	31533	2	Rear Wheel Toe Shims
Passat 1990-97							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Passat 1998-00							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Passat 2001-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Quantum 1982-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Quantum Syncro 1986-88							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Rabbit 1979-84							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Rabbit Pick Up 1980-83							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Volkswagen Continued							
Scirocco 1979-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim	± 1-1/2°	30000	2	Fully Adjustable Rear Camber/Toe Shim
± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim	± 1/4°	31001	2	Full Contact Rear Camber/Toe Shim
± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim	± 1/2°	31002	2	Full Contact Rear Camber/Toe Shim
± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim	± 3/4°	31003	2	Full Contact Rear Camber/Toe Shim
± 1°	31004	2	Full Contact Rear Camber/Toe Shim	± 1°	31004	2	Full Contact Rear Camber/Toe Shim
± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim	± 1-1/4°	31005	2	Full Contact Rear Camber/Toe Shim
± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim	± 1-1/2°	31006	2	Full Contact Rear Camber/Toe Shim
0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim	0° to 1-1/2°	32100	2	Adjustable Full Contact Camber/Toe Shim
Vanagon 1982-91							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Volvo							
240 1980-93 260 1980-84 GLT 1980-84							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
740 1982-92 760 1982-87 780 1982-87 940 1991-97 960 1995-97							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
760 1988-90 780 1988-90 960 1991-94							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
850 1993-97							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
C70, S70, V70 1998-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
S80 1998-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
S90, V90 1997							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Yugo							
GV Series 1986-91							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Light Trucks							
Adjustment Range	Kit #		Description/Comments	Adjustment Range	Kit #		Description/Comments
Acura							
MD-X 2001-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
BMW							
X-5 2000-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt		na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Buick							
Rendezvous 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Cadillac							
Escalade 1999-01							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
Escalade/ESV 2003-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Escalade/EXT 2002-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Chevrolet/GMC 2 Wheel Drive							
C1500, C2500 Suburban 1992-98							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
C1500, C2500 Suburban 1999-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
C1500-C3500 1988-98							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
C1500-C3500 1999-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
C3500 with I-beam 1988-02							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
Colorado 2004-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Envoy 2002							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
G10-G2500 (Express Van) 1996-02							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
G10-G2500 (Express Van) 2003-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
G10-G2500 Vans 1964-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet/GMC 2 Wheel Drive							
G30, 3500 (New Design) 1996-99							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
G30, G3500 Vans 1971-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
P20-P3500 1960-98							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
R10, Blazer, Jimmy 1987-91							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
R10-R3500 1987-91							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
S10, S15 Blazer, Jimmy, Pickup 1983-04							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Tahoe, Yukon 1994-98							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
Tahoe, Yukon 1999-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Trailblazer 2002-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Chevrolet/GMC 4 Wheel Drive							
Avalanche 2002-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Colorado 2004-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Envoy 2002							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
K10 Blazer, K15 Jimmy 1969-91							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet/GMC 4 Wheel Drive Continued							
K10, K20 Suburban 1964-87							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
K10-K25 Pickup 1964-87							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
K1500 Blazer, K1500 Jimmy 1992-94							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
K1500 Tahoe, K1500 Yukon 1992-98							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
K1500 Tahoe, K1500 Yukon 1999-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
K1500, K2500 Suburban 1988-98							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
K1500, K2500 Suburban 1999-02							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
K1500-K2500 1999-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
K1500-K3500 1988-98							
Front Camber				Front Caster			
± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87400	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	28800	2	Camber/Caster Adjusting Bolts (2 bolts)
Tools and/or Misc. Parts							
Tool	92288		Knock Out Plug Remover				
K30 (Dana 60/70 axle) 1977-87							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
K3500 2000-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
S10, S15 Blazer, Jimmy, Pickup 1982-02							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Tracker 1998-04							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Chevrolet/GMC 4 Wheel Drive Continued							
Trailblazer 2002-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
V10 Blazer, V15 Jimmy 1987-91							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
V10-V25 1987-89							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
V10-V2500 Suburban 1987-91							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
V10-V3500 1990-91							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
± 1/8°	I-23001	2	Offset Camber/Caster Sleeve	± 1/8°	I-23001	2	Offset Camber/Caster Sleeve
± 1/4°	I-23002	2	Offset Camber/Caster Sleeve	± 1/4°	I-23002	2	Offset Camber/Caster Sleeve
± 3/8°	I-23003	2	Offset Camber/Caster Sleeve	± 3/8°	I-23003	2	Offset Camber/Caster Sleeve
± 1/2°	I-23004	2	Offset Camber/Caster Sleeve	± 1/2°	I-23004	2	Offset Camber/Caster Sleeve
± 5/8°	I-23005	2	Offset Camber/Caster Sleeve	± 5/8°	I-23005	2	Offset Camber/Caster Sleeve
± 3/4°	I-23006	2	Offset Camber/Caster Sleeve	± 3/4°	I-23006	2	Offset Camber/Caster Sleeve
± 7/8°	I-23007	2	Offset Camber/Caster Sleeve	± 7/8°	I-23007	2	Offset Camber/Caster Sleeve
± 1°	I-23008	2	Offset Camber/Caster Sleeve	± 1°	I-23008	2	Offset Camber/Caster Sleeve
± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve	± 1-1/8°	I-23009	2	Offset Camber/Caster Sleeve
± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve	± 1-1/4°	I-23010	2	Offset Camber/Caster Sleeve
± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve	± 1-3/8°	I-23011	2	Offset Camber/Caster Sleeve
± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve	± 1-1/2°	I-23012	2	Offset Camber/Caster Sleeve
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
V30 (Dana 60/70 axle) 1987-91							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge/Plymouth 4x2							
1500 1994-01							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
1500 2002-05							
Front Camber				Front Caster			
± 2-3/4°	28600	2	Upper Control Arm Adjusting Plate	± 2-3/4°	28600	2	Upper Control Arm Adjusting Plate
1500 2006							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
2500 1994-06							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
3500 1994-99 w/mono beam							
Front Camber				Front Caster			
0°	I-23139	2	OE Style Offset Camber/Caster Bushing	0°	I-23139	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
3500 2000-02 w/mono beam							
Front Camber				Front Caster			
--	na		Non adjustable / No Adjustment needed	--	na		No Adjustment Available
3500 2003-04							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
B100-B350 1971-78							
Front Camber				Front Caster			
± 1-1/4°	35300	2	Camber Adjusting Bolt	± 1-1/4°	35300	2	Camber Adjusting Bolt
B150-B350 1979-94							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
B150-B350 1995-01							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Colt Vista 1984-88							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
D100-D350 1972-93							
Front Camber				Front Caster			
± 1-1/4°	35300	2	Camber Adjusting Bolt	± 1-1/4°	35300	2	Camber Adjusting Bolt
Dakota 1987-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Durango 1998-06							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
Ram 50 1982-93							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge/Plymouth 4x2 Continued							
Ramcharger, Trailduster 1975-93							
Front Camber				Front Caster			
± 1-1/4°	35300	2	Camber Adjusting Bolt	± 1-1/4°	35300	2	Camber Adjusting Bolt
Dodge/Plymouth 4x4							
1500 1994-01							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
0°	23500	2	Offset Ball Joint	0°	23500	2	Offset Ball Joint
± 1/2°	23510	2	Offset Ball Joint	± 1/2°	23510	2	Offset Ball Joint
± 1°	23520	2	Offset Ball Joint	± 1°	23520	2	Offset Ball Joint
± 1-1/2°	23530	2	Offset Ball Joint	± 1-1/2°	23530	2	Offset Ball Joint
± 2°	23540	2	Offset Ball Joint	± 2°	23540	2	Offset Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				
1500 2002-05							
Front Camber				Front Caster			
± 2-3/4°	28600	2	Upper Control Arm Adjusting Plate	± 2-3/4°	28600	2	Upper Control Arm Adjusting Plate
1500 2006							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
2500 HD 1994-99							
Front Camber				Front Caster			
0°	I-23139	2	OE Style Offset Camber/Caster Bushing	0°	I-23139	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
Front Camber				Front Caster			
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
2500 HD 2000-02							
Front Camber				Front Caster			
0°	23700	2	OE Style Ball Joint	0°	23700	2	OE Style Ball Joint
± 1/2°	23710	2	Offset Ball Joint	± 1/2°	23710	2	Offset Ball Joint
± 1°	23720	2	Offset Ball Joint	± 1°	23720	2	Offset Ball Joint
± 1-1/2°	23730	2	Offset Ball Joint	± 1-1/2°	23730	2	Offset Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				
2500 HD 2003-06							
Front Camber				Front Caster			
0°	23800	2	OE Style Ball Joint	0°	23800	2	OE Style Ball Joint
± 1/2°	23810	2	Offset Ball Joint	± 1/2°	23810	2	Offset Ball Joint
± 1°	23820	2	Offset Ball Joint	± 1°	23820	2	Offset Ball Joint
± 1-1/2°	23830	2	Offset Ball Joint	± 1-1/2°	23830	2	Offset Ball Joint
2500 LD 1994-01							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Dodge/Plymouth 4x2 Continued							
3500 1994-99							
Front Camber				Front Caster			
0°	I-23139	2	OE Style Offset Camber/Caster Bushing	0°	I-23139	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
3500 2003-06							
Front Camber				Front Caster			
0°	23800	2	OE Style Ball Joint	0°	23800	2	OE Style Ball Joint
± 1/2°	23810	2	Offset Ball Joint	± 1/2°	23810	2	Offset Ball Joint
± 1°	23820	2	Offset Ball Joint	± 1°	23820	2	Offset Ball Joint
± 1-1/2°	23830	2	Offset Ball Joint	± 1-1/2°	23830	2	Offset Ball Joint
Dakota 1987-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Durango 1998-06							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
Raider 1987-89							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Ram 50 1983-93							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Ramcharger, Trailduster 1974-93							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
W100-W250 1974-93							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
W300, W350 1961-93							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x2							
Bronco II (w/pinch bolt axle) 1989-90							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
Bronco II 1986-88							
Front Camber				Front Caster			
± 1/4°	I-23161	2	OE Style Offset Camber Bushing	± 1°	40360	1	Radius Arm Caster Adjusting Bushings
± 1/2°	I-23162	2	OE Style Offset Camber Bushing				
± 3/4°	I-23163	2	OE Style Offset Camber Bushing				
± 1°	I-23164	2	OE Style Offset Camber Bushing				
± 1-1/4°	I-23165	2	OE Style Offset Camber Bushing				
± 1-1/2°	I-23166	2	OE Style Offset Camber Bushing				
± 1-3/4°	I-23167	2	OE Style Offset Camber Bushing				
± 2°	I-23168	2	OE Style Offset Camber Bushing				
0° to 2-1/4°	54300	2	Fully Adjustable Camber Bushing				
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
E100-E350 1969-91							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
E150-E350 1992-06							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Escape 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Excursion 2000-05							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x2 Continued							
Expedition 1997-02							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)
Expedition 2003-06							
Front Camber				Front Caster			
±2°	28700	2	Cam Bolt Adjusting Kit	±1.5°	28700	2	Cam Bolt Adjusting Kit
Rear Camber				Rear Toe			
±2°	28710	2	Cam Bolt Adjusting Kit	OE Adjustment			Original Equipment Adjustment
Explorer 1991-92							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
				± 1°	40360	1	Radius Arm Caster Adjusting Bushings
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
Explorer 1993-94							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Explorer 1995-01							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers (2)	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers
Explorer 2002-05							
Front Camber				Front Caster			
±1°	29600	2	Adjustable Control Arm Mounting Washers	±1°	29600	2	Adjustable Control Arm Mounting Washers
Rear Camber				Rear Toe			
±1°	29700	2	Adjustable Rear Control Arm Washers	OE Adjustment			Original Equipment Adjustment
Explorer 2006							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
Explorer Sport Trac 2001-03							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers
Explorer Sport Trac 2003-06							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
F100 1966-79							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84300	1	Polyurethane Strut Rod Bushings				
--	84308	1	Polyurethane Track Arm Bushings				
--	84979	1	Replacement Track Arm Bolt				
--	84960	1	Radius Arm/Strut Rod Tensioner				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x2 Continued							
F100 1980-83							
Front Camber				Front Caster			
± 1/4°	I-23161	2	OE Style Offset Camber Bushing	± 1°	40360	1	Radius Arm Caster Adjusting Bushings
± 1/2°	I-23162	2	OE Style Offset Camber Bushing				
± 3/4°	I-23163	2	OE Style Offset Camber Bushing				
± 1°	I-23164	2	OE Style Offset Camber Bushing				
± 1-1/4°	I-23165	2	OE Style Offset Camber Bushing				
± 1-1/2°	I-23166	2	OE Style Offset Camber Bushing				
± 1-3/4°	I-23167	2	OE Style Offset Camber Bushing				
± 2°	I-23168	2	OE Style Offset Camber Bushing				
0° to 2-1/4°	54300	2	Fully Adjustable Camber Bushing				
Tools and/or Misc. Parts							
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
F150 1976-79							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84300	1	Polyurethane Strut Rod Bushings				
--	84308	1	Polyurethane Track Arm Bushings				
--	84979	1	Replacement Track Arm Bolt				
F150 1980-81							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
F150 1982-86							
Front Camber				Front Caster			
± 1/4°	I-23161	2	OE Style Offset Camber Bushing	± 1°	40360	1	Radius Arm Caster Adjusting Bushings
± 1/2°	I-23162	2	OE Style Offset Camber Bushing				
± 3/4°	I-23163	2	OE Style Offset Camber Bushing				
± 1°	I-23164	2	OE Style Offset Camber Bushing				
± 1-1/4°	I-23165	2	OE Style Offset Camber Bushing				
± 1-1/2°	I-23166	2	OE Style Offset Camber Bushing				
± 1-3/4°	I-23167	2	OE Style Offset Camber Bushing				
± 2°	I-23168	2	OE Style Offset Camber Bushing				
0° to 2-1/4°	54300	2	Fully Adjustable Camber Bushing				
Tools and/or Misc. Parts							
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
F150 1987-92							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
Front Camber				Front Caster			
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
F150 1993-96							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x2 Continued							
F150 1997-03							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)
F150 2004-06							
Front Camber				Front Caster			
OE Adjustment	--		Contact Dealer for Adjustment Instructions	OE Adjustment			Original Equipment Adjustment
F250 1966-79							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84300	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
F250 1980-86							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
F250 HD and Super Duty 1998-04							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
F250 LD 1997-99							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)
F250, F350 1987-90							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
				± 1°	40360	1	Radius Arm Caster Adjusting Bushings
Tools and/or Misc. Parts							
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
F350 1964-79							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
F350 1980-86							
Front Camber				Front Caster			
Tool	90360		Camber Correcting Axle Bender	--	na		No Adjustment Available
Tools and/or Misc. Parts							
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				

[illegible]

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x2 Continued							
Ranger (w/pinch bolt axle) 1989-92							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
Ranger (w/pinch bolt axle) 1993-97							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Ranger 1983-88							
Front Camber				Front Caster			
± 1/4°	I-23161	2	OE Style Offset Camber Bushing	± 1°	40360	1	Radius Arm Caster Adjusting Bushings
± 1/2°	I-23162	2	OE Style Offset Camber Bushing				
± 3/4°	I-23163	2	OE Style Offset Camber Bushing				
± 1°	I-23164	2	OE Style Offset Camber Bushing				
± 1-1/4°	I-23165	2	OE Style Offset Camber Bushing				
± 1-1/2°	I-23166	2	OE Style Offset Camber Bushing				
± 1-3/4°	I-23167	2	OE Style Offset Camber Bushing				
± 2°	I-23168	2	OE Style Offset Camber Bushing				
0° to 2-1/4°	54300	2	Fully Adjustable Camber Bushing				
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
Ranger 1998-00							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers (2)	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers
Ranger 2001-06							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
Sportrac 2001-03							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers
Sportrac 2004-05							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4							
Bronco Full Size 1966-79							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	± 2°	40372	1	Polyurethane Caster C-Bushings
				± 4°	40374	1	Polyurethane Caster C-Bushings
				± 7°	40377	1	Polyurethane Caster C-Bushings
Tools and/or Misc. Parts							
--	84300	1	Polyurethane Strut Rod Bushings				
--	84308	1	Polyurethane Track Arm Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
Bronco Full Size 1980-92							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
				± 1°	40360	1	Radius Arm Caster Adjusting Bushings
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
--	84302	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
Bronco Full Size 1993-96							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
Bronco Full Size 1993-96 Continued							
Front Camber				Front Caster			
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
				± 1°	40360	1	Radius Arm Caster Adjusting Bushings
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
Bronco II (with Pinch Bolt Axle) 1989-90							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
Bronco II 1984-90							
Front Camber				Front Caster			
0°	I-23129	2	OE Style Offset Camber/Caster Bushing	0°	I-23129	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23121	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23121	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23122	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23122	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23123	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23123	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23124	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23124	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23125	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23125	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23126	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23126	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23127	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23127	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23128	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23128	2	OE Style Offset Camber/Caster Bushing
3/8°	43501	2	Fully Adjustable Camber/Caster Bushing	3/8°	43501	2	Fully Adjustable Camber/Caster Bushing
3/4°	43502	2	Fully Adjustable Camber/Caster Bushing	3/4°	43502	2	Fully Adjustable Camber/Caster Bushing
1-1/8°	43503	2	Fully Adjustable Camber/Caster Bushing	1-1/8°	43503	2	Fully Adjustable Camber/Caster Bushing
1-1/2°	43504	2	Fully Adjustable Camber/Caster Bushing	1-1/2°	43504	2	Fully Adjustable Camber/Caster Bushing
2°	43505	2	Fully Adjustable Camber/Caster Bushing	2°	43505	2	Fully Adjustable Camber/Caster Bushing
2-3/8°	43506	2	Fully Adjustable Camber/Caster Bushing	2-3/8°	43506	2	Fully Adjustable Camber/Caster Bushing
2-3/4°	43507	2	Fully Adjustable Camber/Caster Bushing	2-3/4°	43507	2	Fully Adjustable Camber/Caster Bushing
3-1/8°	43508	2	Fully Adjustable Camber/Caster Bushing	3-1/8°	43508	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53500	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53500	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
--	84304	1	Polyurethane Strut Rod Bushings				
--	84960	1	Radius Arm/Strut Rod Tensioner				
E250, E350, E450 w/ball joints 1980-03							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
E250, E350, E450 w/ball joints 1980-03 Continued							
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
Escape 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Excursion 2000-05							
Front Camber				Front Caster			
± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23139	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
Expedition 1997-02							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts
Expedition 2003-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Explorer 1991-92							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
Explorer 1993-94							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Explorer 1995-01							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers
Explorer 2002-05							
Front Camber				Front Caster			
± 1°	29600	2	Adjustable Cam Washer	± 1°	29600	2	Adjustable Cam Washer
Rear Camber				Rear Toe			
± 1°	29700	2	Adjustable Cam Washer	OE Adjustment			Original Equipment Adjustment
Explorer 2006							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Explorer Sport Trac 2001-02							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers
Explorer Sport Trac 2003-06							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
F100, F150 1966-79							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	± 2°	40372	1	Polyurethane Caster C-Bushings
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle	± 4°	40374	1	Polyurethane Caster C-Bushings
				± 7°	40377	1	Polyurethane Caster C-Bushings
Tools and/or Misc. Parts							
--	84300	1	Polyurethane Strut Rod Bushings				
--	84308	1	Polyurethane Track Arm Bushings				
--	84979	1	Replacement Track Arm Bolt				
F100, F150 1980-92							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
F100, F150 1980-92 Continued							
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
--	84302	1	Polyurethane Strut Rod Bushings				
F100, F150 1993-96							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
Front Camber				Front Caster			
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
F150 1997-03							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)
F150 2004-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
F150 Heritage 2004							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts
F250 - Super Duty 1997-04							
Front Camber				Front Caster			
± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing
0°	I-23139	2	OE Style Offset Camber/Caster Bushing	0°	I-23139	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
F250 - Super Duty 1997-04 Continued							
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
Tool	92660		Tie Rod End Adjusting Tool				
F250 - Super Duty 2005-06							
Front Camber				Front Caster			
0°	23229	2	OE Style Offset Camber/Caster Bushing	0°	23229	2	OE Style Offset Camber/Caster Bushing
± 1/4°	23221	2	OE Style Offset Camber/Caster Bushing	± 1/4°	23221	2	OE Style Offset Camber/Caster Bushing
± 1/2°	23222	2	OE Style Offset Camber/Caster Bushing	± 1/2°	23222	2	OE Style Offset Camber/Caster Bushing
± 3/4°	23223	2	OE Style Offset Camber/Caster Bushing	± 3/4°	23223	2	OE Style Offset Camber/Caster Bushing
± 1°	23224	2	OE Style Offset Camber/Caster Bushing	± 1°	23224	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	23225	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	23225	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	23226	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	23226	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	23227	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	23227	2	OE Style Offset Camber/Caster Bushing
± 2°	23228	2	OE Style Offset Camber/Caster Bushing	± 2°	23228	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	23211	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	23211	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	23212	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	23212	2	OE Style Offset Camber/Caster Bushing
+1/2°	23268	2	OE Style Offset Camber/Caster Bushing	+2.3°	23268	2	OE Style Offset Camber/Caster Bushing
F250 (with Dana 60/70 axle) 1972-95							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
F250 1980-92							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
--	84302	1	Polyurethane Strut Rod Bushings				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
F250 1993-96							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
Front Camber				Front Caster			
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
F250 1997-99							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	2	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts
F350 (with Dana 60/70 axle) 1978-84							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
F350 (with Dana 60/70 axle) 1985-90							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
Tools and/or Misc. Parts							
--	84315	1	Polyurethane Track Arm Bushings				
F350 (with Dana 60/70 axle) 1991-94							
Front Camber				Front Caster			
± 1-1/2°	60000	2	Camber Adjusting Lower Kingpin	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
F350 1959-79							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
F350 1980-84							
Front Camber				Front Caster			
± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23101	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23102	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23103	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23104	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23105	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23106	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23107	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23108	2	OE Style Offset Camber/Caster Bushing
0°	I-23109	2	OE Style Offset Camber/Caster Bushing	0°	I-23109	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23111	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23112	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23113	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Ford 4x4 Continued							
F350 1999-04							
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
F350 - Super Duty 2005-06							
Front Camber				Front Caster			
0°	23229	2	OE Style Offset Camber/Caster Bushing	0°	23229	2	OE Style Offset Camber/Caster Bushing
± 1/4°	23221	2	OE Style Offset Camber/Caster Bushing	± 1/4°	23221	2	OE Style Offset Camber/Caster Bushing
± 1/2°	23222	2	OE Style Offset Camber/Caster Bushing	± 1/2°	23222	2	OE Style Offset Camber/Caster Bushing
± 3/4°	23223	2	OE Style Offset Camber/Caster Bushing	± 3/4°	23223	2	OE Style Offset Camber/Caster Bushing
± 1°	23224	2	OE Style Offset Camber/Caster Bushing	± 1°	23224	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	23225	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	23225	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	23226	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	23226	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	23227	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	23227	2	OE Style Offset Camber/Caster Bushing
± 2°	23228	2	OE Style Offset Camber/Caster Bushing	± 2°	23228	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	23211	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	23211	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	23212	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	23212	2	OE Style Offset Camber/Caster Bushing
+1/2°	23268	2	OE Style Offset Camber/Caster Bushing	+2.3°	23268	2	OE Style Offset Camber/Caster Bushing
F450, F550 Super Duty 1999-04							
Front Camber				Front Caster			
± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23131	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23132	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23133	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23134	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23135	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23136	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23137	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23138	2	OE Style Offset Camber/Caster Bushing
0°	I-23139	2	OE Style Offset Camber/Caster Bushing	0°	I-23139	2	OE Style Offset Camber/Caster Bushing
0°	40000	2	OE Style Offset Camber/Caster Bushing	0°	40000	2	OE Style Offset Camber/Caster Bushing
± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing	± 1/4°	40001	2	OE Style Offset Camber/Caster Bushing
± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing	± 1/2°	40002	2	OE Style Offset Camber/Caster Bushing
± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing	± 3/4°	40003	2	OE Style Offset Camber/Caster Bushing
± 1°	40004	2	OE Style Offset Camber/Caster Bushing	± 1°	40004	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	40005	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	40006	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	40007	2	OE Style Offset Camber/Caster Bushing
± 2°	40008	2	OE Style Offset Camber/Caster Bushing	± 2°	40008	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	40009	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	40010	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	40011	2	OE Style Offset Camber/Caster Bushing
± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing	± 1/4°	43201	2	Fully Adjustable Camber/Caster Bushing
± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing	± 1/2°	43202	2	Fully Adjustable Camber/Caster Bushing
± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing	± 7/8°	43203	2	Fully Adjustable Camber/Caster Bushing
± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing	± 1-1/4°	43204	2	Fully Adjustable Camber/Caster Bushing
± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing	± 1-5/8°	43205	2	Fully Adjustable Camber/Caster Bushing
± 2°	43206	2	Fully Adjustable Camber/Caster Bushing	± 2°	43206	2	Fully Adjustable Camber/Caster Bushing
± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing	± 2-3/8°	43207	2	Fully Adjustable Camber/Caster Bushing
± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing	± 2-3/4°	43208	2	Fully Adjustable Camber/Caster Bushing
3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-3/4°	53200	2	Fully Adjustable Camber/Caster Bushing
Tools and/or Misc. Parts							
Tool	92530		Camber/Caster Sleeve Puller				
Tool	92532		Ball Joint Thread Protector				
F450-F550 - Super Duty 2005-06							
Front Camber				Front Caster			
± 1/4°	23231	2	OE Style Offset Camber/Caster Bushing	± 1/4°	23231	2	OE Style Offset Camber/Caster Bushing
± 1/2°	23232	2	OE Style Offset Camber/Caster Bushing	± 1/2°	23232	2	OE Style Offset Camber/Caster Bushing
± 3/4°	23233	2	OE Style Offset Camber/Caster Bushing	± 3/4°	23233	2	OE Style Offset Camber/Caster Bushing
± 1°	23234	2	OE Style Offset Camber/Caster Bushing	± 1°	23234	2	OE Style Offset Camber/Caster Bushing
0°	23239	2	OE Style Offset Camber/Caster Bushing	0°	23239	2	OE Style Offset Camber/Caster Bushing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Honda							
CRV 1997-01							
Front Camber				Front Caster			
-1° to +4°	39110	1	Adjustable Control Arm w/Rubber Bushings	--	na		No Adjustment Available
-1° to +4°	39111	1	Left Side Only Adjustable Control Arm w/Rubber Bushings. Includes Ball Joint				
-1° to +4°	39112	1	Right Side Only Adjustable Control Arm w/Rubber Bushings. Includes Ball Joint				
-1° to +4°	39113	1	Adjustable Control Arm w/Polyurethane Bushings. No ball joint				
-1° to +4°	39114	1	Left Side Only Adjustable Control Arm w/Polyurethane Bushings. Includes Ball Joint				
-1° to +4°	39115	1	Right Side Only Adjustable Control Arm w/Polyurethane Bushings. Includes Ball Joint				
Rear Camber				Rear Toe			
-2° to +3°	38900	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38920	2	SmartArm™ Adjustable Link (Rubber)				
CRV 2002-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Element 2003-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
-2° to +3°	38955	2	SmartArm™ Adjustable Link (Polyurethane)	OE Adjustment			Original Equipment Adjustment
-2° to +3°	38975	2	SmartArm™ Adjustable Link (Rubber)				
Passport 1994-02							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Pilot 2003-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Ridgeline 2006							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Hyundai							
Sante Fe 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolts	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Tucson 2005-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Infiniti							
FX35 & FX45 2003-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
QX4 1997-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
International 4x4							
100 Travelall 1964-75							
Front Camber				Front Caster			
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
Scout XLC, Scout II 1971-82							
Front Camber				Front Caster			
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Isuzu 4x2 & 4x4							
Amigo 1989-00							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Ascender 2003-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Axiom 2002-04							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Hombre 2X4 1996-00							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Hombre 4X4 1998-00							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Pickup 1981-95							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rodeo 1991-04							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Rodeo Sport 1991-02							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Trooper 1991-02							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Trooper II 1984-90							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
VehiCross 2000-02							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Jeep							
CJ Series 1977-86							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle				
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
Comanche 1986-94							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Jeep Continued							
Downsize Cherokee 1997-01							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
0°	23500	2	Offset Ball Joint	0°	23500	2	Offset Ball Joint
± 1/2°	23510	2	Offset Ball Joint	± 1/2°	23510	2	Offset Ball Joint
± 1°	23520	2	Offset Ball Joint	± 1°	23520	2	Offset Ball Joint
± 1-1/2°	23530	2	Offset Ball Joint	± 1-1/2°	23530	2	Offset Ball Joint
± 2°	23540	2	Offset Ball Joint	± 2°	23540	2	Offset Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				
Downsize Wagoneer 1984-96							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
0°	23500	2	Offset Ball Joint	0°	23500	2	Offset Ball Joint
± 1/2°	23510	2	Offset Ball Joint	± 1/2°	23510	2	Offset Ball Joint
± 1°	23520	2	Offset Ball Joint	± 1°	23520	2	Offset Ball Joint
± 1-1/2°	23530	2	Offset Ball Joint	± 1-1/2°	23530	2	Offset Ball Joint
± 2°	23540	2	Offset Ball Joint	± 2°	23540	2	Offset Ball Joint
Full-size Cherokee 1977-83							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle				
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
Full-size Wagoneer 1977-83							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle				
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
Grand Cherokee 1993-04							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
0°	23500	2	Offset Ball Joint	0°	23500	2	Offset Ball Joint
± 1/2°	23510	2	Offset Ball Joint	± 1/2°	23510	2	Offset Ball Joint
± 1°	23520	2	Offset Ball Joint	± 1°	23520	2	Offset Ball Joint
± 1-1/2°	23530	2	Offset Ball Joint	± 1-1/2°	23530	2	Offset Ball Joint
± 2°	23540	2	Offset Ball Joint	± 2°	23540	2	Offset Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				
Grand Cherokee 2005-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Grand Wagoneer 1984-91							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle				
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
J10-J20 1977-88							
Front Camber				Front Caster			
1/8° to 1-1/2°	26126	2	Adjustable Camber Shim - 6 bolt spindle	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
1/8° to 1-1/2°	26128	2	Adjustable Camber Shim - 8 bolt spindle				
Tools and/or Misc. Parts							
Tool	92970		Threaded Bushing Extractor and Installer				
Tool	92979		Threaded Bushing Extractor and Installer				
Liberty 2002-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Wrangler 1989-06							
Front Camber				Front Caster			
± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint	± 2-1/2°	61000	2	Camber/Caster Adjusting Upper Ball Joint
0°	23500	2	Offset Ball Joint	0°	23500	2	Offset Ball Joint
± 1/2°	23510	2	Offset Ball Joint	± 1/2°	23510	2	Offset Ball Joint
± 1°	23520	2	Offset Ball Joint	± 1°	23520	2	Offset Ball Joint
± 1-1/2°	23530	2	Offset Ball Joint	± 1-1/2°	23530	2	Offset Ball Joint
± 2°	23540	2	Offset Ball Joint	± 2°	23540	2	Offset Ball Joint
Tools and/or Misc. Parts							
Tool	90200		Ball Joint Press - Required for installation of the 61000/61500 adjustable ball joints				
Kia							
Sorento 2003-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Sportage 1995-02							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Land Rover							
Discovery 1994-04							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Discovery II 2001							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Freelander 2002-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Land Rover 1987-98							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Range Rover 1987-94							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Range Rover 1995-02							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Range Rover 2003-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Lexus							
GX470 2003-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
LX450 1996-97							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
LX470 1998-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
RX300 & RX 330 1999-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	OE Adjustment			Original Equipment Adjustment
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Lincoln							
Aviator 2003-04							
Front Camber				Front Caster			
±1°	29600	2	Adjustable Control Arm Mounting Washers	±1°	29600	2	Adjustable Control Arm Mounting Washers
Rear Camber				Rear Toe			
±1°	29700	2	Adjustable Rear Control Arm Washers	OE Adjustment			Original Equipment Adjustment
Blackwood/EXT 2002-03							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Lincoln Navigator 1997-02							
Front Camber				Front Caster			
± 2-1/4°	I-87385	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87385	2	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29200	2	Camber/Caster Adjusting Bolts (2 bolts)
Lincoln Navigator 2003-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

[illegible]

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Mazda 4x2 & 4x4 Continued							
Navajo 1991-94							
Front Camber				Front Caster			
0°	I-23199	2	OE Style Offset Camber/Caster Bushing	0°	I-23199	2	OE Style Offset Camber/Caster Bushing
± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing	± 1/4°	I-23181	2	OE Style Offset Camber/Caster Bushing
± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing	± 1/2°	I-23182	2	OE Style Offset Camber/Caster Bushing
± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing	± 3/4°	I-23183	2	OE Style Offset Camber/Caster Bushing
± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing	± 1°	I-23184	2	OE Style Offset Camber/Caster Bushing
± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing	± 1-1/4°	I-23185	2	OE Style Offset Camber/Caster Bushing
± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing	± 1-1/2°	I-23186	2	OE Style Offset Camber/Caster Bushing
± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing	± 1-3/4°	I-23187	2	OE Style Offset Camber/Caster Bushing
± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing	± 2°	I-23188	2	OE Style Offset Camber/Caster Bushing
± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing	± 2-1/4°	I-23189	2	OE Style Offset Camber/Caster Bushing
± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing	± 2-1/2°	I-23190	2	OE Style Offset Camber/Caster Bushing
± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing	± 2-3/4°	I-23191	2	OE Style Offset Camber/Caster Bushing
± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing	± 3°	I-23192	2	OE Style Offset Camber/Caster Bushing
± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing	± 3-1/4°	I-23193	2	OE Style Offset Camber/Caster Bushing
± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing	± 3-1/2°	I-23194	2	OE Style Offset Camber/Caster Bushing
3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing	3/4° to 2-1/2°	59400	2	Fully Adjustable Camber/Caster Bushing
Tribute 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Mercedes							
ML320/ML430 1998-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Mercury							
Mariner 4x4 & 4x2 2005-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Mountaineer 1996-01							
Front Camber				Front Caster			
± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)	± 2-1/4°	I-87500	1	Camber/Caster Adjusting Bolts (4 bolts)
± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)	± 2-1/4°	29000	2	Camber/Caster Adjusting Bolts (2 bolts)
± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)	± 2-1/4°	I-87310	1	Camber/Caster Adjusting Washers (4)
± 2-1/4°	29100	2	Camber/Caster Adjusting Washers (2)	± 2-1/4°	29100	2	Camber/Caster Adjusting Washers (2)
Mountaineer 2002-06							
Front Camber				Front Caster			
±1°	29600	2	Adjustable Control Arm Mounting Washers	±1°	29600	2	Adjustable Control Arm Mounting Washers
Rear Camber				Rear Toe			
±1°	29700	2	Adjustable Rear Control Arm Washers	OE Adjustment			Original Equipment Adjustment
Mitsubishi 4x2 & 4x4							
Endeavor 2004-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Montero, Pickup 1983-06							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Outlander 2003-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Pickup 1983-96							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Nissan/Datsun 4x2 & 4x4							
Frontier 1998-04							
Front Camber				Front Caster			
--	25100	1	Nissan Camber/Caster Shims 1mm thick	--	25100	1	Nissan Camber/Caster Shims 1mm thick
--	25200	1	Nissan Camber/Caster Shims 2mm thick	--	25200	1	Nissan Camber/Caster Shims 2mm thick
--	25400	1	Nissan Camber/Caster Shims 4mm thick	--	25400	1	Nissan Camber/Caster Shims 4mm thick
Murano 2003-06							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Nissan/Datsun 4x2 & 4x4 Continued							
Pathfinder 1987-95							
Front Camber				Front Caster			
--	25100	1	Nissan Camber/Caster Shims 1mm thick	--	25100	1	Nissan Camber/Caster Shims 1mm thick
--	25200	1	Nissan Camber/Caster Shims 2mm thick	--	25200	1	Nissan Camber/Caster Shims 2mm thick
--	25400	1	Nissan Camber/Caster Shims 4mm thick	--	25400	1	Nissan Camber/Caster Shims 4mm thick
Pathfinder 1996-04							
Front Camber				Front Caster			
± 2°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Pickup 1973-97							
Front Camber				Front Caster			
--	25100	1	Nissan Camber/Caster Shims 1mm thick	--	25100	1	Nissan Camber/Caster Shims 1mm thick
--	25200	1	Nissan Camber/Caster Shims 2mm thick	--	25200	1	Nissan Camber/Caster Shims 2mm thick
--	25400	1	Nissan Camber/Caster Shims 4mm thick	--	25400	1	Nissan Camber/Caster Shims 4mm thick
Xterra 2000-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Oldsmobile							
Bravada 1991-01							
Front Camber				Front Caster			
± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt	± 2-1/2°	35120	2	Camber Adjusting Control Arm Bolt
Bravada 2002-04							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	OE Adjustment			Original Equipment Adjustment
Pontiac							
Aztec AWD 2001-06							
Front Camber				Front Caster			
± 1°	I-81260	2	Fastcam™ 14mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35420	2	Fastcam™ 14mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Subaru							
Brat 1981-87							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	± 2-1/4°	38100	2	Caster Adjusting Strut Rod
Rear Camber				Rear Toe			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Suzuki 4x4							
Samurai 1986-95							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
Sidekick 1989-98							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Vitara, Grand Vitara 1999-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
X-90 1997-01							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
XL-7 2001-06							
Front Camber				Front Caster			
± 2°	I-81250	2	Fastcam™ 12mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35410	2	Fastcam™ 12mm Camber Adjusting Bolt				
Toyota 4x2 & 4x4							
4 Runner 4x2 1990-95							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
4 Runner 4x2 1996-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
4 Runner 4x4 1984-85							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	1/2° to 6°	Wedge	2	Caster Wedges - See 34801-34958 for listing
4 Runner 4x4 1986-04							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Cab & Chassis 1982-93							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"

Adjustment Range	Kit #	Req/Axle	Description/Comments	Adjustment Range	Kit #	Req/Axle	Description/Comments
Toyota 4x2 & 4x4 Continued							
Highlander 2001-06							
Front Camber				Front Caster			
± 2°	I-81290	2	Fastcam™ 17mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35450	2	Fastcam™ 17mm Camber Adjusting Bolt				
Rear Camber				Rear Toe			
± 2°	I-81270	2	Fastcam™ 15mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35430	2	Fastcam™ 15mm Camber Adjusting Bolt				
Landcruiser SW 1991-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available
Pickup 4x2 1980-95							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Pickup 4x4 1986-95							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
RAV4 1996-06							
Front Camber				Front Caster			
± 2°	I-81280	2	Fastcam™ 16mm Camber Adjusting Bolt	--	na		No Adjustment Available
± 1°	35440	2	Fastcam™ 16mm Camber Adjusting Bolt				
Sequoia 2001-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
T100 4x2 1993-99							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
T100 4x4 1993-99							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Tacoma 4x2 1995-06							
Front Camber				Front Caster			
--	34040	1	Universal Slotted Camber/Caster Shim 1/64"	--	34040	1	Universal Slotted Camber/Caster Shim 1/64"
--	34050	1	Universal Slotted Camber/Caster Shim 1/32"	--	34050	1	Universal Slotted Camber/Caster Shim 1/32"
--	34060	1	Universal Slotted Camber/Caster Shim 1/16"	--	34060	1	Universal Slotted Camber/Caster Shim 1/16"
--	34070	1	Universal Slotted Camber/Caster Shim 1/8"	--	34070	1	Universal Slotted Camber/Caster Shim 1/8"
Tacoma 4x4 1995-06							
Front Camber				Front Caster			
OE Adjustment			Original Equipment Adjustment	OE Adjustment			Original Equipment Adjustment
Tundra 2000-06							
Front Camber				Front Caster			
--	na		Non adjustable/No adjustment needed	--	na		No Adjustment Available

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration																																																																																										
15120				Wheel & Hub Cap Lock Removers 92010 Small diameter lock remover 92015 GM F,N body & Corvette 92020 Lg. diameter GM lock remover 92030 GM & Chrysler lock remover 92040 Ford/Merc./Chry hup cap lock remover 92050 GM C and D body hub cap lock remover 92060 GM hub cap lock remover To be discontinued when stock is depleted. 																																																																																										
15125				Wheel & Hub Cap Lock Removers This hubcap and wheel lock removal set safely removes and replaces GM, Ford and Chrysler with wheel hubcap locks on 1978 and newer vehicles. It will also remove McGard hub cap locks and oth aftermarket wheel lug locks. 																																																																																										
15500				Passenger Car Alignment Starter Kit <table><tr><th>Part Number</th><th>Qty.</th><th>Description</th></tr><tr><td>15500-1</td><td>1</td><td>Cabinet</td></tr><tr><td>30000</td><td>2</td><td>Blue Rear Shim</td></tr><tr><td>30100</td><td>2</td><td>Grey Rear Shim</td></tr><tr><td>30200</td><td>2</td><td>Burgundy Rear Shim</td></tr><tr><td>30300</td><td>2</td><td>White Rear Shim</td></tr><tr><td>35410</td><td>2</td><td>12MM FastCam</td></tr><tr><td>35420</td><td>2</td><td>14MM FastCam</td></tr><tr><td>35430</td><td>2</td><td>15MM FastCam</td></tr><tr><td>35440</td><td>2</td><td>16MM FastCam</td></tr><tr><td>35450</td><td>2</td><td>17MM FastCam</td></tr><tr><td>28800</td><td>2</td><td>GM Truck Cams</td></tr><tr><td>29000</td><td>2</td><td>Ford Truck Cams</td></tr><tr><td>53500</td><td>1</td><td>Downsize Ford 4x4 Adjustable Bushing</td></tr><tr><td>54300</td><td>1</td><td>Ford 2x4 Camber only Adjustable Bushing</td></tr><tr><td>23199</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23182</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23184</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23186</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23190</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23191</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23193</td><td>1</td><td>Ford Pinch Bolt Bushing</td></tr><tr><td>23109</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>23102</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>23104</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>23106</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>23108</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>23112</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>23113</td><td>1</td><td>Full-size Ford 4x4 Bushing</td></tr><tr><td>92004</td><td>1</td><td>SmartParts 2000 Award Winning Alignment Software</td></tr></table> 	Part Number	Qty.	Description	15500-1	1	Cabinet	30000	2	Blue Rear Shim	30100	2	Grey Rear Shim	30200	2	Burgundy Rear Shim	30300	2	White Rear Shim	35410	2	12MM FastCam	35420	2	14MM FastCam	35430	2	15MM FastCam	35440	2	16MM FastCam	35450	2	17MM FastCam	28800	2	GM Truck Cams	29000	2	Ford Truck Cams	53500	1	Downsize Ford 4x4 Adjustable Bushing	54300	1	Ford 2x4 Camber only Adjustable Bushing	23199	1	Ford Pinch Bolt Bushing	23182	1	Ford Pinch Bolt Bushing	23184	1	Ford Pinch Bolt Bushing	23186	1	Ford Pinch Bolt Bushing	23190	1	Ford Pinch Bolt Bushing	23191	1	Ford Pinch Bolt Bushing	23193	1	Ford Pinch Bolt Bushing	23109	1	Full-size Ford 4x4 Bushing	23102	1	Full-size Ford 4x4 Bushing	23104	1	Full-size Ford 4x4 Bushing	23106	1	Full-size Ford 4x4 Bushing	23108	1	Full-size Ford 4x4 Bushing	23112	1	Full-size Ford 4x4 Bushing	23113	1	Full-size Ford 4x4 Bushing	92004	1	SmartParts 2000 Award Winning Alignment Software
Part Number	Qty.	Description																																																																																												
15500-1	1	Cabinet																																																																																												
30000	2	Blue Rear Shim																																																																																												
30100	2	Grey Rear Shim																																																																																												
30200	2	Burgundy Rear Shim																																																																																												
30300	2	White Rear Shim																																																																																												
35410	2	12MM FastCam																																																																																												
35420	2	14MM FastCam																																																																																												
35430	2	15MM FastCam																																																																																												
35440	2	16MM FastCam																																																																																												
35450	2	17MM FastCam																																																																																												
28800	2	GM Truck Cams																																																																																												
29000	2	Ford Truck Cams																																																																																												
53500	1	Downsize Ford 4x4 Adjustable Bushing																																																																																												
54300	1	Ford 2x4 Camber only Adjustable Bushing																																																																																												
23199	1	Ford Pinch Bolt Bushing																																																																																												
23182	1	Ford Pinch Bolt Bushing																																																																																												
23184	1	Ford Pinch Bolt Bushing																																																																																												
23186	1	Ford Pinch Bolt Bushing																																																																																												
23190	1	Ford Pinch Bolt Bushing																																																																																												
23191	1	Ford Pinch Bolt Bushing																																																																																												
23193	1	Ford Pinch Bolt Bushing																																																																																												
23109	1	Full-size Ford 4x4 Bushing																																																																																												
23102	1	Full-size Ford 4x4 Bushing																																																																																												
23104	1	Full-size Ford 4x4 Bushing																																																																																												
23106	1	Full-size Ford 4x4 Bushing																																																																																												
23108	1	Full-size Ford 4x4 Bushing																																																																																												
23112	1	Full-size Ford 4x4 Bushing																																																																																												
23113	1	Full-size Ford 4x4 Bushing																																																																																												
92004	1	SmartParts 2000 Award Winning Alignment Software																																																																																												

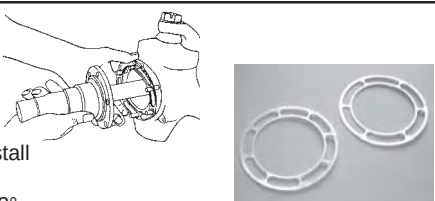
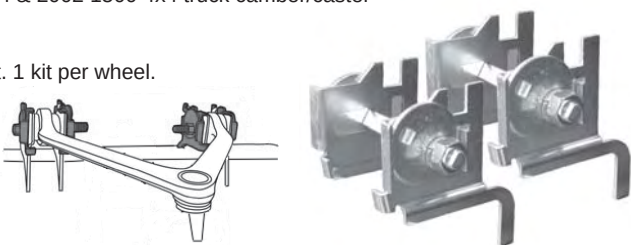
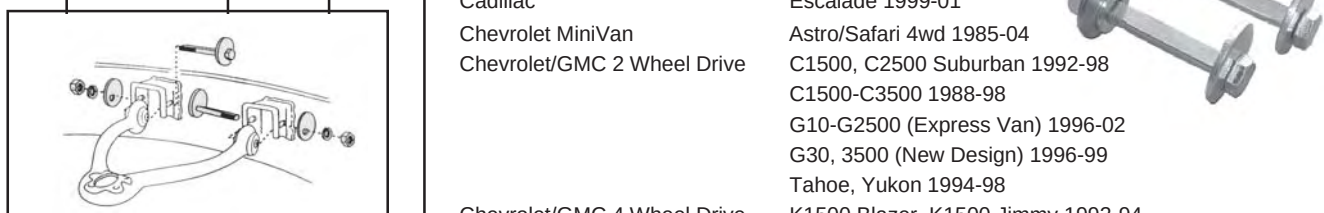
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
16000	--	1	Kit	2003-05 Honda Accord Suspension System Suspension kit including: 16000-1 Lowering Springs 35591 Adjustable Ball Joints 38725 Camber/Toe Smart Arms 93041 The Stiffy[™] Engine Torque Damper All Parts Sold Separately. 
16001	--	1	Kit	1998-02 Honda Accord Suspension System Suspension kit including: 16001-1 Lowering Springs 39207/39208 Adjustable Control Arms 38720 Camber/Toe Kits 93041 The Stiffy[™] Engine Torque Damper. All Parts Sold Separately. 
16002	--	1	Kit	1992-93 Honda Civic Suspension System Suspension kit including: 16002-1 Lowering Springs 35710 Adjustable Control Arm Mount 38920 Camber Arms 93021 The Stiffy[™] Engine Torque Damper All Parts Sold Separately. 
16003	--	1	Kit	1996-00 Honda Civic Suspension System Suspension kit including: 16003-1 Lowering Springs 39101/39102 Adjustable Control Arms 38920 Camber Arms 93020 The Stiffy[™] Engine Torque Damper. All Parts Sold Separately. 
16004	--	1	Kit	2001-02 Honda Civic Suspension System Suspension kit including: 16004-1 Lowering Springs 81260 Fastcams 38970 Camber Arms 93026 The Stiffy[™] Engine Torque Damper. All Parts Sold Separately. 
16005	--	1	Kit	2002-05 Honda Civic SI Suspension System Suspension kit including: 16004-1 Lowering Springs 81280 Fastcams 38970 Camber Arms 93022 The Stiffy[™] Engine Torque Damper. All Parts Sold Separately. 

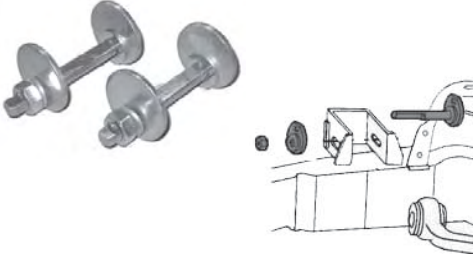
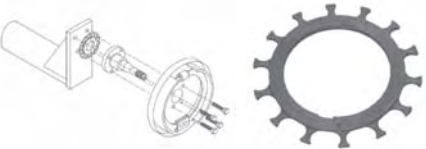


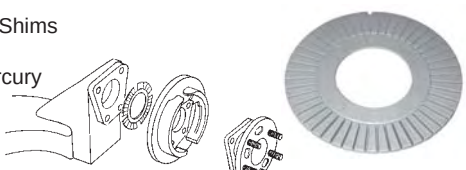
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
16006	--	1	Kit	1994-02 Acura Integra Suspension System Suspension kit including: 16006-1 Lowering Springs 35710 Adjustable Control Arm Mount 38920 Camber Arms 93023 The Stiffy™ Engine Torque Damper All Parts Sold Separately. 
16007	--	1	Kit	2002-03 Acura RSX Suspension System Suspension kit including: 16007-1 Lowering Springs 81280 Fastcams 38970 Camber Arms 93000 The Stiffy™ Engine Torque Damper. All Parts Sold Separately. 
16008	--	1	Kit	2000-04 Ford Focus Suspension System Suspension kit including: 16008-1 Lowering Springs 36350 Camber Plates 36400 Shims 93028 The Stiffy™ Engine Torque Damper. All Parts Sold Separately. 
16009	--	1	Kit	2004-05 Ford Mustang Suspension System Suspension kit including: 16009-1 Lowering Springs 38525 Rear Trailing Arms 93306 Pan Hard Bar Kit 93300 Rear Shock Tower Brace 93301 Front Shock Tower Brace 93302 Lower Chassis Brace 84217 Bump Steer Kit (not shown). All Parts Sold Separately. 

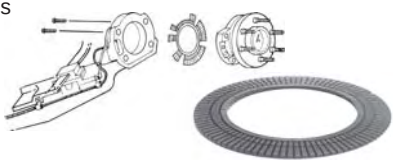



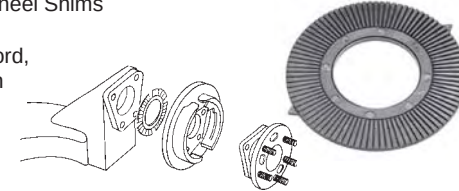
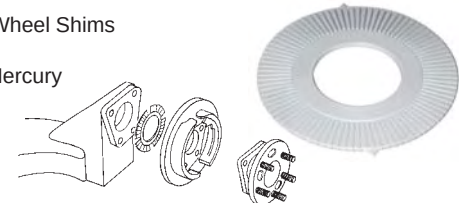
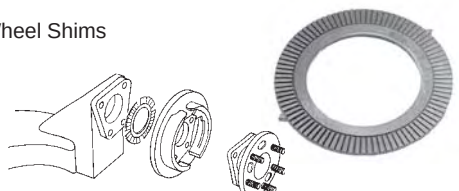
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
16011	--	1	Kit	2002-05 Honda Civic Suspension System Suspension kit including: 16004-1 Lowering Springs 81280 Fastcams 38970 Camber Arms 93026 The Stiffy™ Engine Torque Damper. All Parts Sold Separately. 
16012	--	1	Kit	2002 (early) Acura RSX Suspension System Suspension kit including: 16007-1 Lowering Springs 81260 Fastcams 38970 Camber Arms 93000 The Stiffy™ Engine Torque Damper. All Parts Sold Separately. 
16013	--	1	Kit	1994-95 Honda Civic Suspension System Suspension kit including: 16002-1 Lowering Springs 35710 Adjustable Control Arm Mount 38920 Camber Arms 93023 The Stiffy™ Engine Torque Damper All Parts Sold Separately. 
17000	--	1	Kit	2004-05 Ford Mustang Brake Line Kit SmartStop™ Stainless Steel Brake Line Kit •Reduces Brake Fade •Improves Pedal Feel •Shortens Stopping Distance •Eliminates Failure Due To Heat •Includes Rear Brake Line Brackets •Best Fit On The Market 
17001	--	1	Kit	2005-06 Scion TC Brake Line Kit SmartStop™ Stainless Steel Brake Line Kit •Reduces Brake Fade •Improves Pedal Feel •Shortens Stopping Distance •Eliminates Failure Due To Heat •Includes Rear Brake Line Brackets •Best Fit On The Market 
17002	--	1	Kit	2005-06 Scion TC Clutch Line Kit •Improves Pedal Feel •Eliminates Failure Due To Heat •Best Fit On The Market 

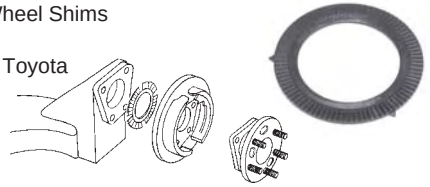


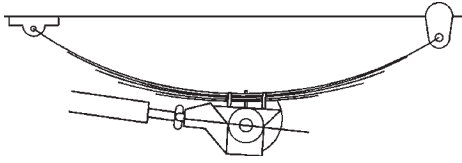
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
23001 23002 23003 23004 23005 23006 23007 23008 23009 23010 23011 23012	1/8° 1/4° 3/8° 1/2° 5/8° 3/4° 7/8° 1° 1-1/8° 1-1/4° 1-3/8° 1-1/2°	.5	1	4x4 camber/caster alignment sleeve for Chevrolet & GMC Chevrolet/GMC 4 Wheel Drive K10 Blazer, K15 Jimmy 1969-91 K10, K20 Suburban 1964-87 K10-K25 Pickup 1964-87 V10 Blazer, V15 Jimmy 1987-91 V10-V25 1987-89 V10-V2500 Suburban 1987-91 V10-V3500 1990-91
23109 23101 23102 23103 23104 23105 23106 23107 23108 23111 23112 23113	0° 1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2° 2-1/4° 2-1/2° 2-3/4°	.5	1	OE style offset camber/caster bushings for Ford trucks F450 SD, F550 SD 1999-04 Bronco Full Size 1980-92 Bronco Full Size 1993-96 E250, E350, E450 w/ball joints 1980-03 F100, F150 1980-92 F100, F150 1993-96 F250 1980-92 F250 1993-96 F350 1980-84 F350 1985-87
23129 23121 23122 23123 23124 23125 23126 23127 23128	0° 1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2°	.5	1	OE style offset camber/caster bushings for Ford trucks 1983-90 4x4 Ford Ranger 1984-90 4x4 Ford Bronco II
23139 23131 23132 23133 23134 23135 23136 23137 23138	0° 1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2°	.5	1	OE style offset camber/caster bushings for Dodge/Ford trucks Dodge/Plymouth 4x2 3500 1994-99 w/mono beam Dodge/Plymouth 4x4 2500 HD 1994-99 Dodge/Plymouth 4x4 3500 1994-99 Ford 4x2 F Series Super Duty 1999-06 Ford 4x4 Excursion 2000-05 Ford 4x4 F250 Super Duty 1997-04 Ford 4x4 F350 1999-04 Ford 4x4 F450, F550 Super Duty 1999-04
23161 23162 23163 23164 23165 23166 23167 23168	1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2°	.5	1	OE style offset camber bushings for Ford Trucks 1983-88 4x2 Ford Ranger 1986-88 4x2 Ford Bronco II 1980-83 4x2 Ford F100 1982-86 4x2 Ford F150
23199 23181 23182 23183 23184 23185 23186 23187 23188 23189 23190 *23191 *23192 *23193 *23194	4wd 0° 2wd 0° 3/16° 1/4° 3/8° 1/2° 9/16° 3/4° 3/4° 1° 1-1/8° 1-1/2° 1-3/8° 1-3/4° 1-1/2° 2° 1-3/4° 2-1/4° 1-7/8° 2-1/2° 2° 2-3/4° 2-1/4° 3° 2-3/8° 3-1/4° 2-1/2° 3-1/2°	.5	1	Ford "Stock Style" camber/caster bushings Ford 4x2 Bronco II (w/pinch bolt axle) 1989-90 Mazda 4x2 & 4x4 B Series 1994-04 Navajo 1991-94 E150-E350 1992-04 Excursion 2000-04 Explorer 1991-94 F150 1987-96 F250 HD Super Duty 1998-04 F250, F350 1987-90 F350 1991-04 Ranger (w/pinch bolt axle) 1989-97 Ford 4x4 Bronco II (with Pinch Bolt Axle) 1989-90 Explorer 1991-94 Ranger (with Pinch Bolt Axle) 1989-97
* For positive adjustment only on 4wd applications. Check for spindle to axle clearance				


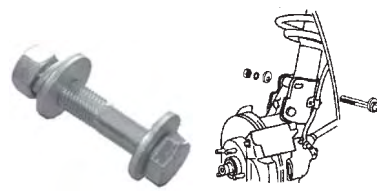
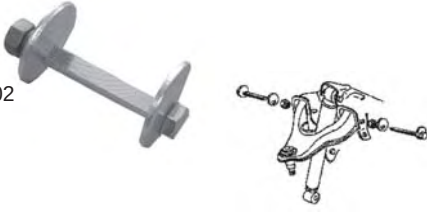
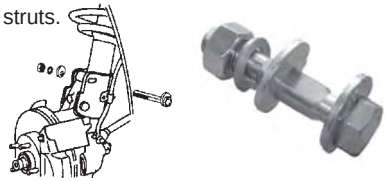
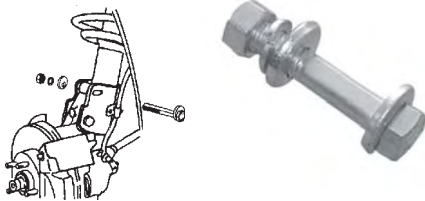
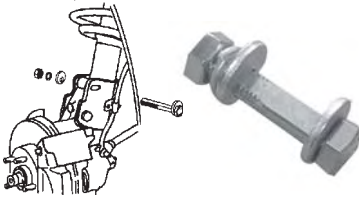
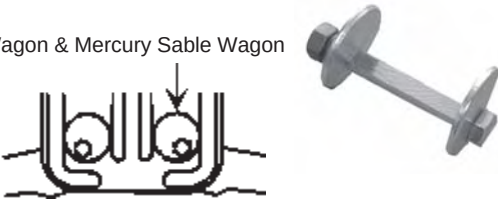
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
23229 23221 23222 23223 23224 23225 23226 23227 23228 23211 23212	0° 1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2° 2-1/4° 2-1/2°	.5	1	OE style offset camber bushings for 2005-06 Ford F250 & F350 Super Duty Trucks 
23239 23231 23232 23233 23234 23235 23236 23237 23238	0° 1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2°	.5	1	OE style offset camber bushings for 2005-06 Ford F450 & F550 Super Duty Trucks 
23268 23269	.5° cam/2.3°cas .3°cam/2.6cas	.5 .5	1 1	OE style offset camber bushings for 2005-06 Ford F250 & F350 Super Duty Trucks 
23500 23510 23520 23530 23540	0° ±1/2° ±1° ±1-1/2° ±2°	.5	1	Jeep & Dodge Truck Offset Ball Joints Dodge/Plymouth 4x4 1500 1994-01 Jeep Downsize Cherokee 1997-01 Jeep Downsize Wagoneer 1984-96 Jeep Grand Cherokee 1993-04 Jeep Wrangler 1989-06 
23700 23710 23720 23730	0° ±1/2° ±1° ±1-1/2°	.5	1	2000-02 2500 HD Dodge Truck Offset Ball Joints 
23800 23810 23820 23830	0° ±1/2° ±1° ±1-1/2°	.5	1	2003-06 2500 HD & 3500 Dodge Truck Offset Ball Joints 

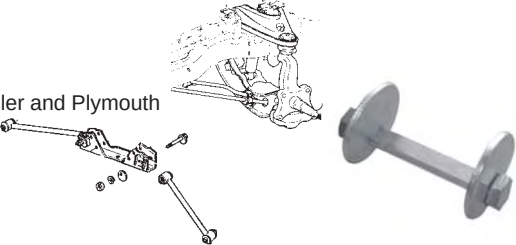
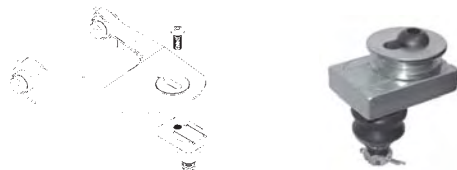
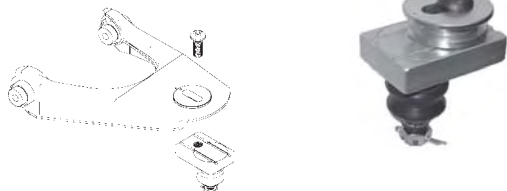
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
25100 25200 25400	1mm 2mm 4mm			Nissan 4x4 and 4x2 Camber/Caster Shims Sold in packages of 10 Van 1987-90 Frontier 1998-04 Pathfinder 1987-95 Pickup 1973-97 
26126 26128	$\pm 1/8^\circ$ to $1-1/2^\circ$ $\pm 1/8^\circ$ to $1-1/2^\circ$	1.25 1.25	1 1	Domestic 4x4's with 6 spindle to knuckle mounting bolts. 1 per package. Domestic 4x4's with 8 spindle to knuckle mounting bolts. 1 per package. Adjustable Front Camber Shim. This shim install between the spindle and the knuckle. Rotate shim for any adjustment between $1/8^\circ$ to $1-1/2^\circ$. 
28600	$\pm 2-3/4^\circ$	.9	1	2002-04 Dodge 1500 2x4 & 2002 1500 4x4 truck camber/caster adjusting cam bolts. 2 bolts and plates per kit. 1 kit per wheel. 
28800	$\pm 2-1/4^\circ$	.9	1	GM truck camber/caster adjusting cam bolts. 2 bolts per kit. 1 kit per wheel. Cadillac Chevrolet MiniVan Chevrolet/GMC 2 Wheel Drive Escalade 1999-01 Astro/Safari 4wd 1985-04 C1500, C2500 Suburban 1992-98 C1500-C3500 1988-98 G10-G2500 (Express Van) 1996-02 G30, 3500 (New Design) 1996-99 Tahoe, Yukon 1994-98 Chevrolet/GMC 4 Wheel Drive K1500 Blazer, K1500 Jimmy 1992-94 K1500 Tahoe, K1500 Yukon 1992-98 K1500, K2500 Suburban 1988-98 K1500-K3500 1988-98 
29000	$\pm 2-1/4^\circ$	.9	1	Ford truck camber/caster adjusting cam bolt. 2 bolts per kit. 1 kit per wheel. Ford 4x2 Explorer 1995-01 Explorer Sport Trac 2001-06 Ranger 1998-06 Sportrac 2001-05 Ford 4x4 Explorer 1995-01 Explorer Sport Trac 2001-06 Ranger 1998-06 Mercury Mountaineer 1996-01 
29100	$\pm 2-1/4^\circ$	.5	1	Ford truck camber/caster adjusting OE style replacement cam washers. 2 washers per kit. 1 kit per wheel. Ford 4x2 Explorer 1995-01 Explorer Sport Trac 2001-03 Ranger 1998-00 Sportrac 2001-03 Ford 4x4 Explorer 1995-01 Explorer Sport Trac 2001-02 Ranger 1998-00 Mercury Mountaineer 1996-01 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
29200	$\pm 2-1/4^\circ$	.9	1	Ford truck camber/caster adjusting cam bolts. 2 bolts per kit. 1 kit per wheel. Ford 4x2 Expedition 1997-02 F150 1997-03 F250 LD 1997-99 Ford 4x4 Expedition 1997-02 F150 1997-03 F150 Heritage 2004 F250 1997-99 Lincoln Navigator 1997-02 
29600	$\pm 1^\circ$	.5	1	Front Adjustable Cam Washer Ford 4x2 Explorer 2002-05 Ford 4x4 Explorer 2002-05 Lincoln Aviator 2003-04 Mercury Mountaineer 2002-06 
29700	$\pm 1^\circ$	.5	1	Rear Adjustable Cam Washer Ford 4x2 Explorer 2002-05 Ford 4x4 Explorer 2002-05 Lincoln Aviator 2003-04 Mercury Mountaineer 2002-06 
30000	$\pm 1-1/2^\circ$	.4	1	Blue Rear Wheel Adjustable Alignment Shim Audi, Chrysler, Dodge, Plymouth and Volkswagen. See application section for complete listings. 
30100	$\pm 1-1/2^\circ$	.4	1	Grey Rear Wheel Adjustable Alignment Shim GM J, L, N and X body cars. See application section for complete listings. 
30200	$\pm 1-1/2^\circ$	.4	1	Burgundy Rear Wheel Adjustable Alignment Shim GM A, C, E, H, K and U body cars. See application section for complete listings. 
30300	$\pm 1-1/2^\circ$	.4	1	White Rear Wheel Adjustable Alignment Shim Audi and Dodge, Chrysler, Plymouth MinVans See application section for complete listings. 
31001 31002 31003 31004 31005 31006	1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2°	.8	1	Blue Series Rear Full Contact Camber/Toe Shims Audi, Chrysler, Chevrolet, Dodge, Eagle, Ford, Geo, Isuzu, Plymouth, Pontiac, Volkswagen 
31101 31102 31103 31104 31105 31106	1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2°	.8	1	White Series Rear Full Contact Camber/Toe Shims Audi, Chrysler, Dodge, Plymouth, Honda, Mercury 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
31121 31122 31123 31124	1/4° 1/2° 3/4° 1°	.8	1	Green Series Rear Full Contact Camber/Toe Shims Plymouth Voyager, Grand Voyager, Chrysler Town & Country Van, Dodge Caravan, Toyota Sienna 
31201 31202 31203 31204 31205 31206	1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2°	.8	1	Grey Series Rear Full Contact Camber/Toe Shims Acura, Buick, Cadillac, Chevrolet, Geo, Honda, Oldsmobile, Pontiac, Toyota 
31301 31302 31303 31304 31305 31306	1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2°	8	1	Burgundy Series Rear Full Contact Camber/Toe Shims Buick, Cadillac, Chevrolet, Oldsmobile, Pontiac, Toyota 
31501 31502 31503 31504	1/4° 1/2° 3/4° 1°	8	1	Pontiac/Toyota Series Rear Full Contact Camber/Toe Shims 
31520 31521 31522 31523	.13° .25° .38° .50°	8	1	VW Camber Only Shims 1999-04 Beetle 1999-04 Golf 1999-04 GTI 1999-04 Jetta 
31520 31521 31522 31523	.13° .25° .38° .50°	8	1	VW Toe Only Shims 
31901 31902 31903 31904	1/4° 1/2° 3/4° 1°	8	1	GM Series Rear Full Contact Camber/Toe Shims 
32100	0° to 1-1/2°	.8	1	Blue System 2000 Fully Adjustable Rear Wheel Shims Audi, Chrysler, Chevrolet, Dodge, Eagle, Ford, Geo, Isuzu, Plymouth, Pontiac, Volkswagen 
32200	0° to 1-1/2°	.8	1	White System 2000 Fully Adjustable Rear Wheel Shims Audi, Chrysler, Dodge, Plymouth, Honda, Mercury 
32300	0° to 1-1/2°	.8	1	Grey System 2000 Fully Adjustable Rear Wheel Shims Acura, Buick, Cadillac, Chevrolet, Geo, Honda, Oldsmobile, Pontiac, Toyota 



Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
32400	0° to 1-1/2°	.8	1	Burgundy System 2000 Fully Adjustable Rear Wheel Shims Buick, Cadillac, Chevrolet, Oldsmobile, Pontiac, Toyota 
34000 34010 34020 34030 34040 34050 34060 34070	1/64" 1/32" 1/16" 1/8" 1/64" 1/32" 1/16" 1/8"			7/16" - 1/2" Bolt Thickness 7/16" - 1/2" Bolt Thickness 7/16" - 1/2" Bolt Thickness 7/16" - 1/2" Bolt Thickness 9/16" - 5/8" Bolt Thickness 9/16" - 5/8" Bolt Thickness 9/16" - 5/8" Bolt Thickness 9/16" - 5/8" Bolt Thickness Universal Camber/Caster Shims 25 per package 
34240 34241 34242	1/32" 1/16" 1/8"			1984-96 Wagoneer, 1993-04 Grand Cherokee, 1984-02 Cherokee, 1984-96 Comanche 6 shims per package 
34500 34510 34520	1/32" 1/16" 1/8"			1963-1982 Corvette Rear Torque Arm Shims 12 shims per package 
34600	± 1/8°/shim	.3		Toyota Front Caster Shims 10 shims per package 1983-91 Toyota Camry 1985-92 Toyota Cressida 1983-86 Toyota Tercel 1987-97 Toyota Camry Wagon 1981-84 Toyota Starlet 1983-88 Toyota Tercel 4wd Wagon 
Part #	Wedge Angle	Wedge Width		Universal Caster Wedges. Measure leaf spring width and angle change needed to select correct wedge.  All wedges are sold in packages of six. 
34801	1/2°	2"	1	
34802	1°	2"	1	
34803	1-1/2°	2"	1	
34804	2°	2"	1	
34805	2-1/2°	2"	1	
34806	3°	2"	1	
34807	3-1/2°	2"	1	
34808	4°	2"	1	
34810	6°	2"	1	
34841	1/2°	2-1/2"	1	
34842	1°	2-1/2"	1	
34843	1-1/2°	2-1/2"	1	
34844	2°	2-1/2"	1	
34845	2-1/2°	2-1/2"	1	
34846	3°	2-1/2"	1	
34847	3-1/2°	2-1/2"	1	
34848	4°	2-1/2"	1	
34851	1/2°	3-1/2"	1	
34852	1°	3-1/2"	1	
34853	1-1/2°	3-1/2"	1	
34854	2°	3-1/2"	1	
34855	2-1/2°	3-1/2"	1	
34856	3°	3-1/2"	1	
34857	3-1/2°	3-1/2"	1	
34858	4°	3-1/2"	1	
34861	1/2°	4"	1	
34862	1°	4"	1	
34863	1-1/2°	4"	1	
34864	2°	4"	1	
34865	2-1/2°	4"	1	
34866	3°	4"	1	
34867	3-1/2°	4"	1	
34868	4°	4"	1	

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
34951 34952 34953 34954 34955 34956 34957 34958	1/2° 1° 1-1/2° 2° 2-1/2° 3° 3-1/2° 4°	3" to 4" 3" to 4" 3" to 4" 3" to 4" 3" to 4" 3" to 4" 3" to 4" 3" to 4"	1 1 1 1 1 1 1 1	3 in 1 Caster Wedge. Break offs allow wedge to be 4", 3-1/2" or 3" in width.  All wedges are sold in packages of six.
35040				Adaptor washer allows the 3544 Fastcam bolt to be used in struts that have a slot instead of a round mounting hole. 
35100	± 2-1/4°	.4	1	GM MacPherson Strut Cars and MinVans See Application Pages for complete listings 
35120	± 2-1/2°	.7	1	GM Camber Adjusting Cam Bolts Buick Cadillac Chevrolet/GMC 4x4 Isuzu 4x2 & 4x4 Oldsmobile Riviera 1979-85 Eldorado 1979-85 S10, S15 Blazer 1982-02 Jimmy, Pickup 1982-02 Hombre 4X4 1998-00 Bravada 1991-01 Toronado 1966-78 Toronado 1979-85 
35150	± 2-1/2°	.5	1	Camber Adjusting Cam Bolt for vehicles with slotted struts. See application pages for complete listings. 
35200	± 2-1/2°	.4	1	Camber Adjusting Cam Bolt Kit Chrysler Dodge Plymouth New Yorker FWD 1983 Charger 1982-83 Horizon 1978-83 Reliant 1981-83 Scamp 1982-83 TC3 1980-83 TC3 1984-87 Turismo 1980-83 
35220	± 2-1/2°	.4	1	Camber Adjusting Cam Bolt Kit 1984-97 FWD Dodge, Chrysler and Plymouth 
35250	± 2-1/2°	.7	1	Camber Adjusting Cam Bolt Kit Rear of: 1986-2004 Ford Taurus Wagon & Mercury Sable Wagon 




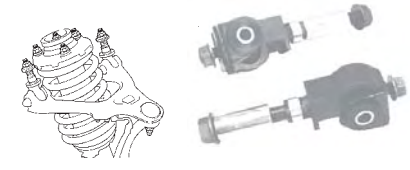
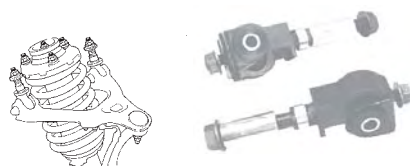
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
35300	$\pm 1-1/4^\circ$	.7	1 2 1	Camber Adjusting Cam Bolt Kit Rear of: 1963-83 Corvettes Front of: 1971-84 RWD Dodge, Chrysler and Plymouth 1971-80 RWD Ford cars 
35350		.3	1	Pinion Angle Adjuster 1997-98 Jeep TJ 
35410	$\pm 1^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 35200 and 12mm OE bolts For complete Fastcam™ listings see application pages.
35420	$\pm 1^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 35220 and 14mm OE bolts For complete Fastcam™ listings see application pages.
35430	$\pm 1^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 15mm OE bolts Toyota Avalon Camry Camry Wagon Celica Corolla 4wd Corolla All Trac Corolla FWD MR2 Paseo Tercel
35440	$\pm 1^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 35100, 35150 and 16mm OE bolts. For complete Fastcam™ listings see application pages.
35450	$\pm 1^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 17mm OE bolts Toyota Avalon Camry Camry Wagon Celica. Packaged as 1 bolt per box. One bolt will adjust one wheel $\pm 1^\circ$. For more adjustment see part numbers 81250 thru 81290 
35570	+1-3/4° to +4°	.8	1	Adjustable Front Ball Joint Acura 3.2 CL 2001-04 Acura 3.2 TL 1999-02 Acura 3.2 TL 2003-04 Acura Legend 1991-96 Honda Accord 1998-02 Honda Accord 2003-04  <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
35580	-1-3/4° to 4°	.8	1	Adjustable Front Ball Joint Honda Prelude 1997-02 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i> 

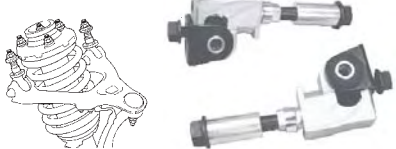



Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration	
35590	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 CL 2001-04 Acura 3.2 TL 1999-06 Acura TSX 2004-06 Honda Accord 1998-06 Honda Civic 1988-91 Honda CRX 1988-92 Honda Odyssey 1995-98	  Patent # 6,478,318 & 6,676,142 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
35591	+1-1/2° to +3°	.8	1	Adjustable Front Ball Joint Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 CL 2001-04 Acura 3.2 TL 1999-06 Acura TSX 2004-06 Honda Accord 1998-06 Honda Civic 1988-91 Honda CRX 1988-92 Honda Odyssey 1995-98	  Patent # 6,478,318 & 6,676,142 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
35592	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Acura 3.2 TL 1996-98 Acura 3.5 RL 1999-06 Acura Integra 1990-01 Acura Legend 1991-96 Honda Civic 1992-00 Honda Del Sol 1993-97 Honda Prelude non-SH model 1997-02	  Patent # 6,478,318 & 6,676,142 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
35593	+1-1/2° to +3°	.8	1	Adjustable Front Ball Joint Acura 3.2 TL 1996-98 Acura 3.5 RL 1999-06 Acura Integra 1990-01 Acura Legend 1991-96 Honda Civic 1992-00 Honda Del Sol 1993-97 Honda Prelude non-SH model 1997-02	  Patent # 6,478,318 & 6,676,142 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>


Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration	
35594	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Honda Accord 1990-97 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>	  Patent # 6,478,318 & 6,676,142
35595	+1-1/2° to +3°	.8	1	Adjustable Front Ball Joint Honda Accord 1990-97 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>	  Patent # 6,478,318 & 6,676,142
35596	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Honda Prelude SH 1997-02 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>	  Patent # 6,478,318 & 6,676,142
35597	+1-1/2° to +3°	.8	1	Adjustable Front Ball Joint Honda Prelude SH 1997-02 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>	  Patent # 6,478,318 & 6,676,142
35598	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Acura Vigor 1992-94 Honda Prelude 1992-96 Honda Prelude 1992-96 Honda Prelude non-SH model 1997-02 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>	  Patent # 6,478,318 & 6,676,142
35599	+1-1/2° to +3°	.8	1	Adjustable Front Ball Joint Acura Vigor 1992-94 Honda Prelude 1992-96 Honda Prelude 1992-96 Honda Prelude non-SH model 1997-02 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>	  Patent # 6,478,318 & 6,676,142

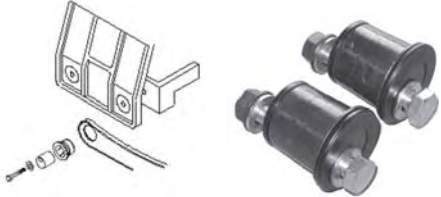


Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
35620	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Dodge Avenger 1995-00 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99   Patent # 6,478,318 & 6,676,142
35621	+1-1/2° to +3°	.8	1	Adjustable Front Ball Joint Dodge Avenger 1995-00 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99   Patent # 6,478,318 & 6,676,142 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
35622	-1-1/2° to +1-1/2°	.8	1	Adjustable Front Ball Joint Chrysler Cirrus 1995-00 Chrysler Sebring Conv. 1996-04 Chrysler Sebring/Exc. Conv. 1995-00 Dodge Stratus 1995-00 Dodge Stratus 4dr 2001-06   Patent # 6,478,318 & 6,676,142
35640	-1° to +3°	.8	1	Front Camber Adjusting Bracket 1983-87 Honda Prelude Front   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i> Patent # USD443850S
35650	-1° to +3°	.8	1	Camber Adjusting Bracket 1988-91 Honda Prelude Front & Rear   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i> Patent # USD443850S
35655	±1-1/4°	.8	1	Front Camber Adjusting Bracket Audi TT FWD & AWD-Quattro 2000-06 Volkswagen Beetle 1999-06 Volkswagen Golf 1999-06 Volkswagen GTI 1999-06 Volkswagen Jetta 1999-05   <i>Ball Joint Not Included</i> <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>





Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration	
35660	-3/4° to +1°	.5	1	Brass Bushing Camber Adjusting Racing Kits Acura 2.2 CL 1996-97 Honda Accord Wagon 1990-97 Acura 2.3 CL 1998-99 Honda Civic 1988-95 Acura 2.5 TL 1995-98 Honda CRX 1988-92 Acura 3.0 CL 1996-99 Honda Del Sol 1993-97 Acura 3.2 TL 1996-98 Honda Odyssey 1995-98 Acura 3.5 RL 1999-06 Honda Prelude 1992-96 Front Acura Integra 1990-01 Honda Prelude 1992-96 Rear Acura Vigor 1992-94 Honda Prelude SH model 1997-02 Rear Honda Accord 1990-97 Isuzu Oasis 1996-99	
Not for Street Use!					
35661				Replacement Brass Kit This brass kit will replace the brass bushings in Ingalls 35660, 35670, 35680, & 35690 kits. It will also replace the Polyurethane bushings with brass in the Ingalls 35700, 35720, 35750 & 35770 kits. RUBBER bushings in the 35710, 35730, 3576, & 35780 kits are NOT replaceable.	
35670	+1-1/4° to +3°	.5	1	Brass Bushing Camber Adjusting Racing Kits Acura 2.2 CL 1996-97 Honda Accord Wagon 1990-97 Acura 2.3 CL 1998-99 Honda Civic 1988-95 Acura 2.5 TL 1995-98 Honda CRX 1988-92 Acura 3.0 CL 1996-99 Honda Del Sol 1993-97 Acura 3.2 TL 1996-98 Honda Odyssey 1995-98 Acura 3.5 RL 1999-06 Honda Prelude 1992-96 Front Acura Integra 1990-01 Honda Prelude 1992-96 Rear Acura Vigor 1992-94 Honda Prelude SH model 1997-02 Honda Accord 1990-97 Isuzu Oasis 1996-99	
Not for Street Use!					
Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.					
35680	-3/4° to +1°	.5	1	Brass Bushing Camber Adjusting Racing Kits Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 4dr 2001-04 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-98	
Not for Street Use!					
35690	+1-1/4° to +3°	.5	1	Brass Bushing Camber Adjusting Racing Kits Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 4dr 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-98	
Not for Street Use!					
				Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.	
35700	-3/4° to +1°	.5	1	Camber Adjusting Control Arm Mounts with Polyurethane Bushings Acura 2.2 CL 1996-97 Honda Accord Wagon 1990-97 Acura 2.3 CL 1998-99 Honda Civic 1988-95 Acura 2.5 TL 1995-98 Honda CRX 1988-92 Acura 3.0 CL 1996-99 Honda Del Sol 1993-97 Acura 3.2 TL 1996-98 Honda Odyssey 1995-98 Acura 3.5 RL 1999-06 Honda Prelude 1992-96 Front Acura Integra 1990-01 Honda Prelude 1992-96 Rear Acura Vigor 1992-94 Honda Prelude SH model 1997-02 Rear Honda Accord 1990-97 Isuzu Oasis 1996-99	
					






Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
35701				Replacement Polyurethane Bushing Kit This kit will replace the Polyurethane bushings in Ingalls 35700, 35720, 35750, & 35770 kits. It will also replace the brass bushings with Polyurethane in the Ingalls 35660, 35670, 35680 & 35690 kits. RUBBER bushings in the 35710, 35730, 3576, & 35780 kits are NOT replaceable.
35710	-3/4° to +1°	.5	1	Camber Adjusting Control Arm Mounts with Rubber Bushings Acura 2.2 CL 1996-97 Honda Accord Wagon 1990-97 Acura 2.3 CL 1998-99 Honda Civic 1988-95 Acura 2.5 TL 1995-98 Honda CRX 1988-92 Acura 3.0 CL 1996-99 Honda Del Sol 1993-97 Acura 3.2 TL 1996-98 Honda Odyssey 1995-98 Acura 3.5 RL 1999-06 Honda Prelude 1992-96 Front Acura Integra 1990-01 Honda Prelude 1992-96 Rear Acura Vigor 1992-94 Honda Prelude SH model 1997-02 Rear Honda Accord 1990-97 Isuzu Oasis 1996-99 
35720	+1-1/4° to 3°	.5	1	Camber Adjusting Control Arm Mounts with Polyurethane Bushings Acura 2.2 CL 1996-97 Honda Accord Wagon 1990-97 Acura 2.3 CL 1998-99 Honda Civic 1988-95 Acura 2.5 TL 1995-98 Honda CRX 1988-92 Acura 3.0 CL 1996-99 Honda Del Sol 1993-97 Acura 3.2 TL 1996-98 Honda Odyssey 1995-98 Acura 3.5 RL 1999-06 Honda Prelude 1992-96 Front Acura Integra 1990-01 Honda Prelude 1992-96 Rear Acura Vigor 1992-94 Honda Prelude SH model 1997-02 Rear Honda Accord 1990-97 Isuzu Oasis 1996-99 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i> 
35730	+1-1/4° to 3°	.5	1	Camber Adjusting Control Arm Mounts with Rubber Bushings Acura 2.2 CL 1996-97 Honda Accord Wagon 1990-97 Acura 2.3 CL 1998-99 Honda Civic 1988-95 Acura 2.5 TL 1995-98 Honda CRX 1988-92 Acura 3.0 CL 1996-99 Honda Del Sol 1993-97 Acura 3.2 TL 1996-98 Honda Odyssey 1995-98 Acura 3.5 RL 1999-06 Honda Prelude 1992-96 Front Acura Integra 1990-01 Honda Prelude 1992-96 Rear Acura Vigor 1992-94 Honda Prelude SH model 1997-02 Rear Honda Accord 1990-97 Isuzu Oasis 1996-99 <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i> 
35750	-3/4° to +1°	.5	1	Camber Adjusting Control Arm Mounts with Polyurethane Bushings Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 4dr 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-98 
35760	-3/4° to +1°	.5	1	Camber Adjusting Control Arm Mounts with Rubber Bushings Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 4dr 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-98 

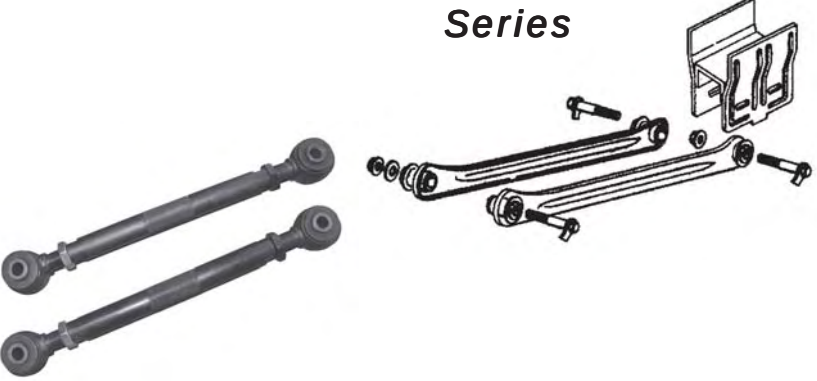
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
35770	+1-1/4° to +3°	.5	1	Camber Adjusting Control Arm Mounts with Polyurethane Bushings Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 4dr 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-98  <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
35780	+1-1/4° to +3°	.5	1	Camber Adjusting Control Arm Mounts with Rubber Bushings Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 4dr 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Eclipse 1995-99 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-98  <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
35850	±1°	.5	1	Adjustable Rear Control Arm Mount Chrysler Sebring 2dr 2001-06 Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Diamante 1997-04 Mitsubishi Eclipse 1995-05 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-03   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
35860	-1° to +3°	.5	1	Adjustable Rear Control Arm Mount Chrysler Sebring 2dr 2001-06 Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Diamante 1997-04 Mitsubishi Eclipse 1995-05 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-03    <i>Spacers are placed between mounts and inner fender well!</i> <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
35870	+2°	.5	1	Adjustable Rear Control Arm Mount Already have the 35850 installed, but need more adjustment? The 35870 kit supplies the hardware to increase your adjustment range. Chrysler Sebring 2dr 2001-06 Chrysler Sebring/Exc. Conv. 1995-00 Dodge Avenger 1995-00 Dodge Stratus 2001-06 Eagle Talon AWD 1995-98 Eagle Talon FWD 1995-98 Mitsubishi Diamante 1997-04 Mitsubishi Eclipse 1995-05 Mitsubishi Eclipse 4wd 1995-99 Mitsubishi Galant 1994-03   <i>Spacers are placed between mounts and inner fender well!</i>





Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
36201 36205 36212	+2° +1-1/2° +1-1/2°		1 1 1	12mm Camber Wedge for vehicles with 14mm strut bolts 14mm Camber Wedge for vehicles with 16mm strut bolts 10mm Camber Wedge for vehicles with 12mm strut bolts  
36250	+1-1/4°		1	Adjustable Front Camber Plate Ford Taurus Sedan 1996-06 Ford Taurus Wagon 1996-04 Mercury Sable Sedan 1996-06 Mercury Sable Wagon 1996-04  
36260	+1-1/4°		1	Adjustable Front Camber Plate Ford Windstar 1995-02  
36350	±1°		1	Front Camber Plate Ford Focus 2000-04  
36400	±1/2 to ±1°		.5	Camber Adjusting Shims. Kits includes two (2) 1/2° shims, two (2) 1° shims and mounting hardware. Ford Focus 2000-04 
36700	±1°	1	1	Camber Adjusting Strut Mounting Plate Ford Escort 1981-85 Ford EXP 1982-85 Mercury LN7 1981-83 Mercury Lynx 1982-85  
36750	±1°	1	1	Camber Adjusting Strut Mounting Plate Ford Taurus Sedan 1986-89 Ford Taurus Wagon 1986-95 Mercury Sable Sedan 1986-90 Mercury Sable Wagon 1986-90  






Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
36760	$\pm 1^\circ$	1	1	Camber Adjusting Strut Mounting Plate Ford Taurus Sedan 1990-95 Mercury Sable Sedan 1991-95 Mercury Sable Wagon 1991-95  
36800	$\pm 1^\circ$	1	1	Camber Adjusting Strut Mounting Plate Ford Escort 1986-90 Ford EXP 1986-88 Ford Tempo 1986-94 Mercury Lynx 1986-87 Mercury Topaz 1984-94  
37000	$\pm 3/4^\circ$	.5	1*	Rear Camber/Toe Eccentrics Ford Taurus Sedan 1986-06 Mercury Sable Sedan 1986-06 Note: Camber adjustment requires minimum of 2 eccentrics per side 
37050	$\pm 1-1/2^\circ$	.5	1	Rear Toe Eccentric Ford Taurus Wagon 1986-95 Mercury Sable Wagon 1986-95  
37150	--	.5	1	Front Toe Replacement Adjuster Chrysler 300M 1999-04 Chrysler Concorde 1998-04 Chrysler LHS 1998-02 Dodge Intrepid 1998-04 
38100	$\pm 2-1/4^\circ$	.5	1	Adjustable Front Strut Rod 1980-89 All Subaru DL, GL, GL10, Hatchback and B 1990-92 Subaru Loyale and XT Coupe  
38150	$\pm 1^\circ$	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Polyurethane Bushings Corrects Camber/Toe Chrysler Concorde 1993-97 Chrysler LHS 1994-97 Chrysler New Yorker FWD 1994-97 Dodge Intrepid 1993-97 Eagle Vision 1993-97 Nissan Sentra 1991-94 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>

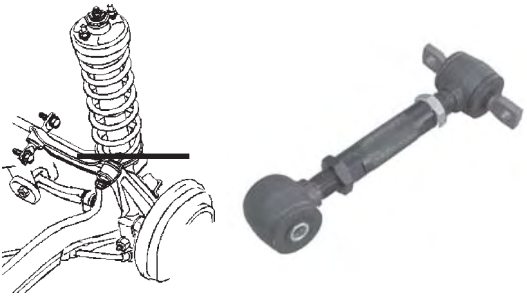
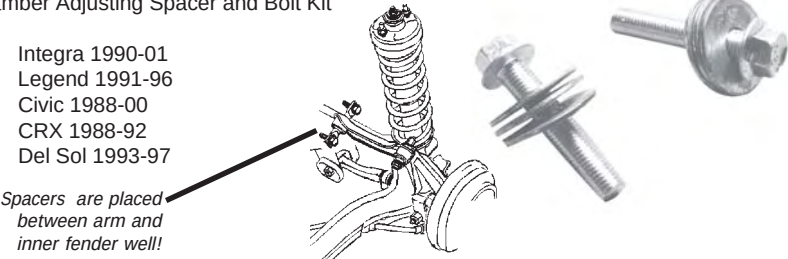
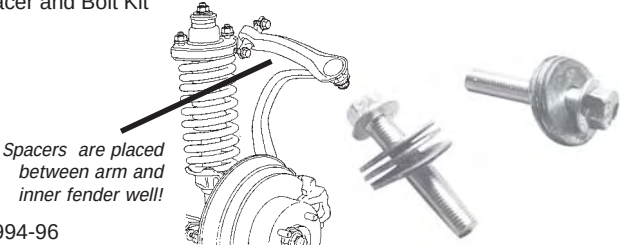
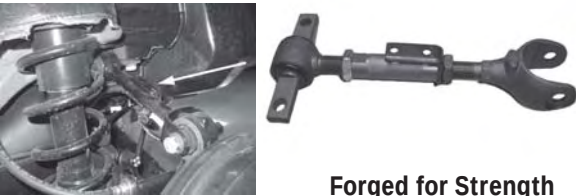
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38170	$\pm 1^\circ$	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Camber/Toe Chrysler Concorde 1993-97 Chrysler LHS 1994-97 Chrysler New Yorker FWD 1994-97 Dodge Intrepid 1993-97 Eagle Vision 1993-97 Nissan Sentra 1991-94 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38180	$\pm 1^\circ$	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Camber/Toe Chrysler 300M 1999-04 Chrysler Concorde 1998-04 Chrysler LHS 1998-02 Chrysler New Yorker FWD 1998-00 Dodge Intrepid 1998-04 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38200	$\pm 2^\circ$	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Polyurethane Bushings Corrects Toe Ford Escort 1991-96 Mercury Tracer 1991-96   SmartArm™ Series <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38220	$\pm 2^\circ$	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Toe Ford Escort 1991-96 Mercury Tracer 1991-96   SmartArm™ Series <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>


Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38250	±1°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Polyurethane Bushings Corrects Camber Nissan Maxima 1985-94 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38270	±1°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Camber Nissan Maxima 1985-94 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38300	±1°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Polyurethane Bushings Corrects Camber Nissan Stanza 1987-92 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38320	±1°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Camber Nissan Stanza 1987-92 SmartArm™ Series   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38350	±2°	.5	1	Adjustable Front Strut Rod for Correcting Caster Ford Taurus Sedan 1986-95 Ford Taurus Wagon 1986-95 Mercury Sable Sedan 1986-95 Mercury Sable Wagon 1986-996  
38420	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Suspension Link with Rubber Bushings Corrects Camber Eagle Talon AWD 1990-94 Mitsubishi Eclipse 4wd 1990-94 Mitsubishi Galant 4wd 1990-92 Plymouth Laser 4wd 1992-94 SmartArm™ Series   Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38500	-2° tp +3°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Links with Rubber Bushings Corrects Camber Ford Taurus 1986-06 Forged for Strength SmartArm™ Series 
38510	-2° tp +3°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Camber Chevrolet Impala 2003-06 Chevrolet Monte Carlo 2000-06 Buick Regal 1997-04 SmartArm™ Series 
38525	±2"	.5	1	SmartArm™ Series Adjustable Lower Rear Trailing Arms with Rubber Bushings Corrects Ford Mustang 2005-06 Forged for Strength SmartArm™ Series 
38540	-2° tp +3°	.5	1	SmartArm™ Series Adjustable Lower Rear Control Arms for correcting camber and toe with Rubber Bushings Corrects Hyundai Tiburon 2003-06 SmartArm™ Series 


Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38545	-2° tp +3°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Link with Rubber Bushings Corrects Camber Pontiac Grand Prix GTP 2000-03  Forged for Strength SmartArm™ Series
38600	-2° tp +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Polyurethane Bushings Corrects Camber 1986-89 Honda Accord   SmartArm™ Series <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38620	-2° tp +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Rubber Bushings Corrects Camber 1986-89 Honda Accord   SmartArm™ Series <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
38720	-1.5° to +3°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Links with Rubber Bushings This kit replaces both lower links to correct camber and toe. Acura 3.2 CL 2001-04 Acura 3.2 TL 1999-02 Honda Accord 1998-02   SmartArm™ Series Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38725	-1.5° to +3°	.5	1	SmartArm™ Series Adjustable Lower Rear Suspension Links with Rubber Bushings This kit replaces both lower links to correct camber and toe. Acura 3.2 TL 2003-06 Acura TSX 2004-06 Honda Accord 2003-06 Honda Odyssey 2003-06   SmartArm™ Series Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38811	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Left Side Suspension Link with Polyurethane Bushings Corrects Camber DRIVER SIDE ONLY! Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 TL 1996-98 Acura Vigor 1992-94 Honda Accord 1990-97 Honda Accord Wagon 1994-96   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
38812	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Right Side Suspension Link with Polyurethane Bushings Corrects Camber PASSENGER SIDE ONLY! Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 TL 1996-98 Acura Vigor 1992-94 Honda Accord 1990-97 Honda Accord Wagon 1994-96   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
38831	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Left Side Suspension Link with Rubber Bushings Corrects Camber DRIVER SIDE ONLY! Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 TL 1996-98 Acura Vigor 1992-94 Honda Accord 1990-97 Honda Accord Wagon 1994-96   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38832	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Right Side Suspension Link with Rubber Bushings Corrects Camber PASSENGER SIDE ONLY! Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 TL 1996-98 Acura Vigor 1992-94 Honda Accord 1990-97 Honda Accord Wagon 1994-96   <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i>
38900	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Polyurethane Bushings Corrects Camber Acura Integra 1990-01 Honda Civic 1988-00 Honda CRV 1997-01 Honda CRX 1988-92 Honda Del Sol 1993-97   Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>

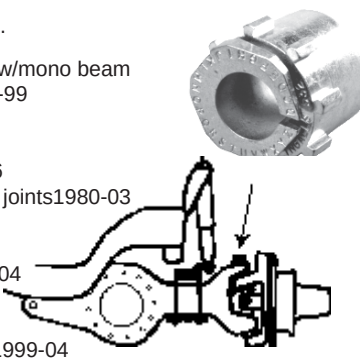
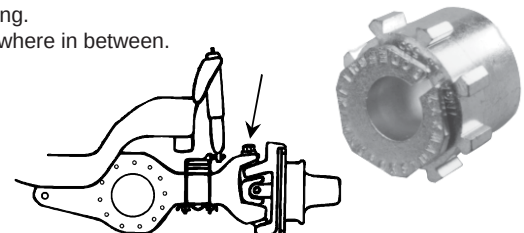
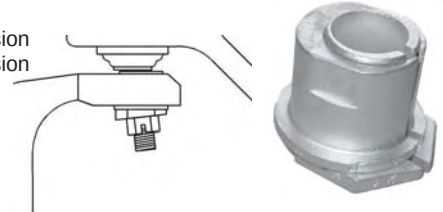
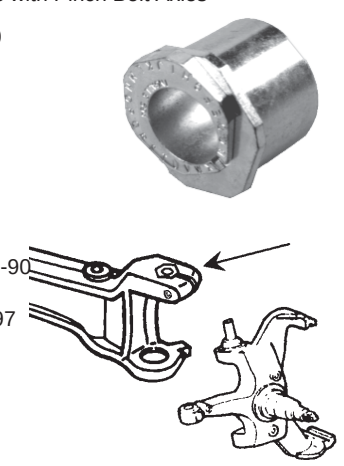

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38920	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Rubber Bushings Corrects Camber Acura Integra 1990-01 Honda Civic 1988-00 Honda CRV 1997-01 Honda CRX 1988-92 Honda Del Sol 1993-97 Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance on ALL suspension components.</i> 
38930	+3/4°	.5	1	Rear Camber Adjusting Spacer and Bolt Kit Acura Integra 1990-01 Acura Legend 1991-96 Honda Civic 1988-00 Honda CRX 1988-92 Honda Del Sol 1993-97 <i>Spacers are placed between arm and inner fender well!</i> 
38940	+3/4°	.5	1	Rear Camber Adjusting Spacer and Bolt Kit Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 TL 1996-98 Acura Vigor 1992-94 Honda Accord 1990-97 Honda Accord Wagon 1994-96 <i>Spacers are placed between arm and inner fender well!</i> 
38950	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Polyurethane Bushings Corrects Camber Acura RSX 2002-06 Honda Civic 2001-05 Honda Civic SI 2001-05 SmartArm™ Series Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i> 
38970	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Rubber Bushings Corrects Camber Acura RSX 2002-06 Honda Civic 2001-05 Honda Civic SI 2001-05 SmartArm™ Series Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i> 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
38955	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Polyurethane Bushings Corrects Camber Honda Element 2003-06 SmartArm™ Series  Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
38975	-2° to +3°	.5	1	SmartArm™ Series Adjustable Upper Rear Suspension Link with Rubber Bushings Corrects Camber Honda Element 2003-06 SmartArm™ Series  Forged for Strength <i>Note: When installing this product on a vehicle that has been modified, always check for clearance in ALL suspension components.</i>
39100	-1° to +4°	.8	1	Front Upper Adjustable Control Arm with OE style Rubber Bushings. Does not include the ball joint. 1996-00 Honda Civic  
39101	-1° to +4°	.8	1	Left Side Only (driver side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint. 1996-00 Honda Civic  
39102	-1° to +4°	.8	1	Right Side Only (passenger side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint 1996-00 Honda Civic  

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
39103	-1° to +4°	.8	1	Front Upper Adjustable Control Arm with Polyurethane Bushings. Does not include a ball joint. 1996-00 Honda Civic 
39104	-1° to +4°	.8	1	Left Side Only (driver side). Front Upper Adjustable Control Arm with Polyurethane Bushings. Arm includes ball joint. 1996-00 Honda Civic 
39105	-1° to +4°	.8	1	Right Side Only (passenger side). Front Upper Adjustable Control Arm with Polyurethane Bushings. Arm includes ball joint 1996-00 Honda Civic 
39110	-1° to +4°	.8	1	Front Upper Adjustable Control Arm with OE style Rubber Bushings. Does not include the ball joint. 1997-01 Honda CRV 
39111	-1° to +4°	.8	1	Left Side Only (driver side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint. 1997-01 Honda CRV 
39112	-1° to +4°	.8	1	Right Side Only (passenger side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint 1997-01 Honda CRV 
39113	-1° to +4°	.8	1	Front Upper Adjustable Control Arm with Polyurethane Bushings. Does not include the ball joint. 1997-01 Honda CRV 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
39114	-1° to +4°	.8	1	Left Side Only (driver side). Front Upper Adjustable Control Arm with Polyurethane Bushings. Arm includes ball joint. 1997-01 Honda CRV  
39115	-1° to +4°	.8	1	Right Side Only (passenger side). Front Upper Adjustable Control Arm with Polyurethane Bushings. Arm includes ball joint. 1997-01 Honda CRV  
39203	-2° to +1-1/4°	.8	1	Left Side Only (driver side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint. Acura 3.2 CL 2001-03 Acura 3.2 TL 1999-02 Acura 3.2 TL 2003 Honda Accord 1998-02 
39204	-2° to +1-1/4°	.8	1	Right Side Only (passenger side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint. Acura 3.2 CL 2001-03 Acura 3.2 TL 1999-02 Acura 3.2 TL 2003 Honda Accord 1998-02 
39207	+1° to +4°	.8	1	Left Side Only (driver side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint. Acura 3.2 CL 2001-03 Acura 3.2 TL 1999-02 Acura 3.2 TL 2003 Honda Accord 1998-02 
39208	+1° to +4°	.8	1	Right Side Only (passenger side). Front Upper Adjustable Control Arm with OE style Rubber Bushings. Arm includes ball joint. Acura 3.2 CL 2001-03 Acura 3.2 TL 1999-02 Acura 3.2 TL 2003 Honda Accord 1998-02 
39250	+1° to +4°	.8	1	Complete Kit - Both Right and Left side Control Arms Front Upper Adjustable Control Arms with OE style Rubber Bushings. Arm includes ball joint. Honda Civic 1992-95 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
40000 40001 40002 40003 40004 40005 40006 40007 40008 40009 40010 40011	0° 1/4° 1/2° 3/4° 1° 1-1/4° 1-1/2° 1-3/4° 2° 2-1/4° 2-1/2° 2-3/4°	.5	1	OE Style Offset Camber/Caster Bushings for Ford/Dodge Trucks Dodge/Plymouth 4x2 3500 1994-99 w/mono beam Dodge/Plymouth 4x4 2500 HD 1994-99 Dodge/Plymouth 4x4 3500 1994-99 Ford 4x2 F450, F550 SD 1999-04 Ford 4x4 Bronco Full Size 1980-96 Ford 4x4 E250, E350, E450 w/ball joints 1980-03 Ford 4x4 Excursion 2000-05 Ford 4x4 F100, F150 1980-96 Ford 4x4 F250 - Super Duty 1997-04 Ford 4x4 F250 1980-96 Ford 4x4 F350 1980-04 Ford 4x4 F450, F550 Super Duty 1999-04
40360	±1°	.7	1	Ford Truck Radius Arm Caster Adjusting Bushing Ford 4x2 Explorer 1991-92 Ford 4x2 F250, F350 1987-90 Ford 4x4 Bronco Full Size 1980-96
40372 40374 40377	2° 4° 7°	.7	1	Polyurethane Caster Adjusting C-Bushings 1966-79 Ford Bronco 1966-79 F-100 1966-79 F-150
43201 43202 43203 43204 43205 43206 43207 43208	1/4° 1/2° 7/8° 1-1/4° 1-5/8° 2° 2-3/8° 2-3/4°	.5	1	Fully Rotational Camber/Caster Bushings for Ford Trucks. Dodge/Plymouth 4x2 3500 1994-99 w/mono beam Dodge/Plymouth 4x4 2500 HD 1994-99 Dodge/Plymouth 4x4 3500 1994-99 Ford 4x2 F450, F550 SD 1999-04 Ford 4x4 Bronco Full Size 1980-96 Ford 4x4 E250, E350, E450 w/ball joints 1980-03 Ford 4x4 Excursion 2000-05 Ford 4x4 F100, F150 1980-96 Ford 4x4 F250 - Super Duty 1997-04 Ford 4x4 F250 1980-96 Ford 4x4 F350 1980-04 Ford 4x4 F450, F550 Super Duty 1999-04 patent # 4,400,007
43500 43501 43502 43503 43504 43505 43506 43507 43508	0° 3/8° 3/4° 1-1/8° 1-1/2° 2° 2-3/8° 2-3/4° 3-1/8°	.5	1	Fully Rotational Camber/Caster Bushings for Ford Downsized Trucks. 1983-90 4x4 Ford Ranger 1984-90 4x4 Ford Bronco II

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
53200	3/4° to 2-3/4°	.5	1	Fully Adjustable Camber/Caster Bushing. Will adjust from 3/4° to 2-3/4° and anywhere in between. Dodge/Plymouth 4x2 3500 1994-99 w/mono beam Dodge/Plymouth 4x4 2500 HD 1994-99 Dodge/Plymouth 4x4 3500 1994-99 Ford 4x2 F450, F550 SD 1999-04 Ford 4x4 Bronco Full Size 1980-96 Ford 4x4 E250, E350, E450 w/ball joints 1980-03 Ford 4x4 Excursion 2000-05 Ford 4x4 F100, F150 1980-96 Ford 4x4 F250 - Super Duty 1997-04 Ford 4x4 F250 1980-96 Ford 4x4 F350 1980-04 Ford 4x4 F450, F550 Super Duty 1999-04 
53500	3/4° to 2-3/4°	.5	1	Fully Adjustable Camber/Caster Bushing. Will adjust from 3/4° to 2-3/4° and anywhere in between. 1983-90 4x4 Ford Ranger 1984-90 4x4 Ford Bronco II 
54300	±2-1/4°	.5	1	Fully Adjustable Camber/Caster Bushing for Ford Trucks 1980-83 4x2 Ford F-100 with ball joint suspension 1982-86 4x4 Ford F-150 with ball joint suspension 1983-88 4x2 Ford Ranger 1986-88 4x2 Ford Bronco II 
59400	3/4° to 2-1/2° on Full size trucks 3/4° to 1-3/4° on Down size trucks	.5	1	Fully Adjustable Camber/Caster Bushings for Ford Trucks with Pinch Bolt Axles Ford 4x2 Bronco II (w/pinch bolt axle) 1989-90 Ford 4x2 E150-E350 1992-06 Ford 4x2 Excursion 2000-05 Ford 4x2 Explorer 1991-94 Ford 4x2 F150 1987-96 Ford 4x2 F250 HD Super Duty 1998-04 Ford 4x2 F250, F350 1987-90 Ford 4x2 F350 1991-04 Ford 4x2 Ranger (w/pinch bolt axle) 1989-97 Ford 4x4 Bronco II (with Pinch Bolt Axle) 1989-90 Ford 4x4 Explorer 1991-94 Ford 4x4 Ranger (with Pinch Bolt Axle) 1989-97 Mazda 4x2 & 4x4 B2300 1994-04 Mazda 4x2 & 4x4 B2500 1998-04 Mazda 4x2 & 4x4 B3000 1994-04 Mazda 4x2 & 4x4 B4000 1994-04 Mazda 4x2 & 4x4 Navajo 1991-94 
60000	± 1-1/2°	.8	1	Camber Adjusting Replacement Lower Kingpin. Fully Rotational After Installation. Chevrolet/GMC 4 Wheel Drive K30 (Dana 60/70 axle) 1977-91 Dodge/Plymouth 4x4 W300, W350 1961-93 Ford 4x4 F250 (with Dana 60/70 axle) 1972-95 Ford 4x4 F350 (with Dana 60/70 axle) 1978-94 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
61000	± 2-1/2°	.8	1	Fully Adjustable Replacement Upper Ball Joint. Adjusts Both Camber/Caster Dodge/Plymouth 4x4 1500 1994-01 Dodge/Plymouth 4x4 2500 LD 1994-01 Jeep Comanche 1986-94 Jeep Downsize Wagoneer 1984-01 Jeep Grand Cherokee 1993-04 Jeep Wrangler 1989-06  
70200 70201 70202	1/32" 1/16" 1/8"			Wilson Tandem Shims for Hutchins Suspension Tandem Shims sold in Packages of 6. 
70210 70211 70212	1/32" 1/16" 1/8"			Peterbilt Air Leaf Adjustment Shim Tandem Shims sold in Packages of 6. 
70215 70216 70217	1/32" 1/16" 1/8"			1990 & Newer Freightliner "Single Slot" Adjustment Shim. Tandem Shims sold in Packages of 6. 
70220 70221 70222	1/32" 1/16" 1/8"			Freightliner double slot adjustment shim Tandem Shims sold in Packages of 6. 
70225 70226 70227	1/32" 1/16" 1/8"			Freightliner air glide adjustment shim Tandem Shims sold in Packages of 6. 
70230 70231 70232	1/32" 1/16" 1/8"			Volvo/White adjustment shim Tandem Shims sold in Packages of 6. 
70235 70236 70237	1/32" 1/16" 1/8"			Freightliner torque arm shim Tandem Shims sold in Packages of 6. 

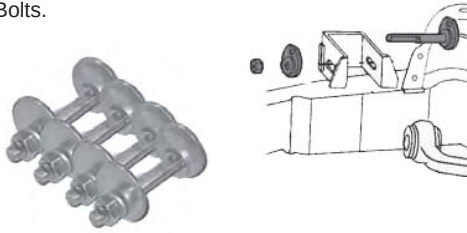
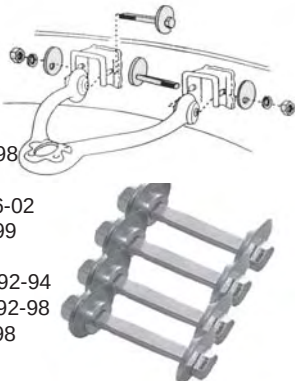
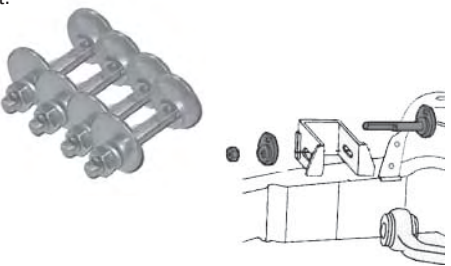
Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
70240 70241 70242	1/32" 1/16" 1/8"			I.H.C. Torque arm adjustment shim Tandem Shims sold in Packages of 6. 
70243 70244 70245 70246 70247 70248 70249	1/32" 1/16" 1/8" 1/4" 1/2" 3/4" 1"			Kenworth air glide "8 bagger" adjustment spacers  Tandem Shims sold in Packages of 6.
70250 70251 70252	1/32" 1/16" 1/8"			Peterbuilt and Kenworth Tandem Shims Tandem Shims sold in Packages of 6. 
70255 70256 70257	1/32" 1/16" 1/8"			International Tandem Shims Tandem Shims sold in Packages of 6. 
70260 70261 70262	1/32" 1/16" 1/8"			VanHool Tandem Shims Tandem Shims sold in Packages of 6. 
70265 70266 70267	1/32" 1/16" 1/8"			VanHool Tandem Shims Tandem Shims sold in Packages of 6. 
70270 70271 70272	1/32" 1/16" 1/8"			Prevost Tandem Shims Tandem Shims sold in Packages of 6. 
70275 70276 70277	1/32" 1/16" 1/8"			Prevost Tandem Shims Tandem Shims sold in Packages of 6. 
70280 70281 70282	1/32" 1/16" 1/8"			Prevost Tandem Shims Tandem Shims sold in Packages of 6. 



Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
81250	$\pm 2^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 35200 and 12mm OE bolts For complete Fastcam™ listings see application pages. 
81260	$\pm 2^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 35220 and 14mm OE bolts For complete Fastcam™ listings see application pages. 
81270	$\pm 2^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 15mm OE bolts Toyota Avalon Camry Camry Wagon Celica Corolla 4wd Corolla All Trac Corolla FWD MR2 Paseo Tercel 
81280	$\pm 2^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 35100, 35150 and 16mm OE bolts. For complete Fastcam™ listings see application pages. 
81290	$\pm 2^\circ$	.4	1	Fastcam™ Camber Adjusting Bolt for MacPherson Struts, replaces 17mm OE bolts Toyota Avalon Camry Camry Wagon Celi Packaged as 2 bolts per box. Install both bolt in one strut for $\pm 2^\circ$ of adjustment. 
84000		.5	.5	OE Replacment Sway Bar Links 
84200		.5	1	OE Replacment Ball Joint Rear of: Acura 2.2 CL 1996-97 Acura 2.3 CL 1998-99 Acura 2.5 TL 1995-98 Acura 3.0 CL 1996-99 Acura 3.2 TL 1996-98 Acura Vigor 1992-94 Honda Accord 1990-97 Front of: Honda Accord 1998-02 Honda Civic 1992-00 Honda Del Sol 1993-97 Honda Prelude non-SH model 1997-02 
84215 84217		.5 .5	1 1	OE Replacment Lower Ball Joint Roll Center Correction Ball Joint 2005-06 Ford Mustang 





Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
84300			.5	Ford Truck Strut Rod/Radius Arm Bushings Ford 4x2 F100 1966-79 Ford 4x2 F150 1976-79 Ford 4x2 F250 1966-79 Ford 4x4 Bronco Full Size 1966-79 Ford 4x4 F100, F150 1966-79 Ford 4x4 F250 1966-79  <i>One kit will correct both wheels</i> These replacement polyurethane radius arm bushings allow the pivot action required for the suspension to operate without binding, but prevent the forward and backward wheel movement that generates the pulling associated with panic stops.
84302			.5	Ford Truck Strut Rod/Radius Arm Bushings Ford 4x2 F100 1980-83 Ford 4x2 F150 1980-92 Ford 4x2 F250, F350 1987-90 Ford 4x2 F350 1980-86 Ford 4x4 Bronco Full Size 1980-92 Ford 4x4 F100, F150 1980-92 Ford 4x4 F250 1980-92 Ford 4x4 F350 1980-87  <i>One kit will correct both wheels</i> These replacement polyurethane radius arm bushings allow the pivot action required for the suspension to operate without binding, but prevent the forward and backward wheel movement that generates the pulling associated with panic stops.
84304			.5	Ford Truck Strut Rod/Radius Arm Bushings Ford 4x2 Bronco II (w/pinch bolt axle) 1989-90 Ford 4x2 Bronco II 1986-88 Ford 4x2 Explorer 1991-92 Ford 4x2 Ranger (w/pinch bolt axle) 1989-92 Ford 4x2 Ranger 1983-88 Ford 4x4 Bronco II (with Pinch Bolt Axle) 1989-90 Ford 4x4 Bronco II 1984-90 Ford 4x4 Explorer 1991-92 Ford 4x4 Ranger (with Pinch Bolt Axle) 1989-92 Ford 4x4 Ranger 1983-90  <i>One kit will correct both wheels</i> These replacement polyurethane radius arm bushings allow the pivot action required for the suspension to operate without binding, but prevent the forward and backward wheel movement that generates the pulling associated with panic stops.
84308			1	Polyurethane Replacement Track Arm Bushings Ford 4x2 F100 1966-79 Ford 4x2 F150 1976-79 Ford 4x4 Bronco Full Size 1966-79 Ford 4x4 F100, F150 1966-79 Ford 4x4 F250 1966-79  Replacement track arm mount available. See 84979
84315			1	Polyurethane Replacement Track Arm Bushings Ford 4x4 F350 (with Dana 60/70 axle) 1985-90 Ford 4x4 F350 1985-87 



Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
84950				Replacement Steering Coupler 1978-up Ford Fairmont 1980-up Ford Granada 1979-up Ford LTD Fullsize 1977-79 Ford LTD II 1974-up Ford Mustang 1974-up Ford Pinto 1974-up Ford Thunderbird 1974-up Ford Torino 1980-up Lincoln Lincoln Fullsize 1973-up Lincoln Lincoln Mark 1979-up Mercury Capri 1974-up Mercury Cougar 1980-up Mercury Marquis 1973-76 Mercury Montego 1979-up Mercury Zephyr 
84951				Repacement Steering Coupler 1975-79 Ford Granada 1975-79 Mercury Monarch
84952				Repacement Steering Coupler 1966-81 Ford Trucks Bronco 1968-74 Ford Trucks E100 1975-88 Ford Trucks E150 1968-74 Ford Trucks E200 1968-88 Ford Trucks E250 1968-74 Ford Trucks E300 1968-88 Ford Trucks E350 1966-81 Ford Trucks F100 1975-81 Ford Trucks F150 1966-81 Ford Trucks F250, F350
84953				Repacement Steering Coupler 1968-78 Ford LTD 1970-77 Ford Maverick 1967-73 Ford Mustang 1967-73 Ford Thunderbird 1968-73 Ford Torino 1968-79 Lincoln Lincoln Fullsize 1967-73 Mercury Cougar 1968-78 Mercury Marquis
84954				Repacement Steering Coupler 1960-up American Motors 1960-up Chrysler Cars Chrysler Cars 1967-up Dodge Trucks 1/2, 3/4, 1 ton Truck 1960-76 GM Passenger Cars 1967-87 GM Trucks 1/2, 3/4, 1 ton Truck 1970-up GM Trucks 1/2, 3/4, 1 ton Van 1969-up GM Trucks Blazer 1970-92 GM Trucks Suburban 1968-80 International Truck 1973-up Jeep
84960			.5	Strut Rod Tensioners The 84960 helps eliminate vehicle wandering by firming up the radius arm or strut rod bushings. Simply remove the radius arm nut and washer, install the 84960 and washer, then re-torque the nut. The 84960 can frequently provide an easy five-minute fix for wandering front ends. Fits automobiles using radius arms or strut rods. Factory bushings must be at least twice the thickness of the 84960 and approximately the same diameter. 

These polyurethane steering coupler kits restore lost steering feel without having to replace the entire stock shaft assembly. Stock "Rag" mounts deteriorate quickly when subjected to high underhood heat and chemicals. Helps solve slow steering response and bump shimmy that occurs when the stock steering coupler is fatigued or deteriorated.

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
84979				Ford 4x4 Truck Replacement Track Arm Bolt This steel track bar mounting kit effectively repairs worn out front housings where the track bar mounting bolt meets the front axle. Fits most 1976-79 4x4 F-100, F-150 and Broncos with coil springs. Installation requires a KD-2044 tapered reamer available through most tool outlets. Corrects excessive steering play. To look for wear, turn steering and watch for bolt movement in front axle. 
87385	$\pm 2\text{-}1/4^\circ$	.9	.5	Ford Truck Camber/Caster Adjusting Cam Bolts. 4 bolts per kit. 1 kit per axle. Ford 4x2 Expedition 1997-02 Ford 4x2 F150 1997-03 Ford 4x2 F250 LD 1997-99 Ford 4x4 Expedition 1997-02 Ford 4x4 F150 1997-03 Ford 4x4 F150 Heritage 2004 Ford 4x4 F250 1997-99 Lincoln Lincoln Navigator 1997-02 
87400	$\pm 2\text{-}1/4^\circ$	.9	.5	GM Truck Camber/Caster Adjusting Cam Bolts. 4 bolts per kit. 1 kit per axle. Cadillac Escalade 1999-01 Chevrolet Astro/Safari 4wd 1985-06 Chevrolet/GMC 2 WD C1500, C2500 Suburban 1992-98 Chevrolet/GMC 2 WD C1500-C3500 1988-98 Chevrolet/GMC 2 WD G10-G2500 (Express Van) 1996-02 Chevrolet/GMC 2 WD G30, 3500 (New Design) 1996-99 Chevrolet/GMC 2 WD Tahoe, Yukon 1994-98 Chevrolet/GMC 4 WD K1500 Blazer, K1500 Jimmy 1992-94 Chevrolet/GMC 4 WD K1500 Tahoe, K1500 Yukon 1992-98 Chevrolet/GMC 4 WD K1500, K2500 Suburban 1988-98 Chevrolet/GMC 4 WD K1500-K3500 1988-98 
87500	$\pm 2\text{-}1/4^\circ$	.9	.5	Ford truck camber/caster adjusting cam bolt. 4 bolts per kit. 1 kit per axle. Ford 4x2 Explorer 1995-01 Ford 4x2 Explorer Sport Trac 2001-03 Ford 4x2 Ranger 1998-00 Ford 4x2 Sportrac 2001-03 Ford 4x4 Explorer 1995-01 Ford 4x4 Explorer Sport Trac 2001-02 Ford 4x4 Ranger 1998-00 Mercury Mountaineer 1996-01 
90161 90162 90163 90164 90165 90166 90167 90168 90169 90171 90172 90173				Replacement ball joint press components C-clamp Adaptor Small Receiver Medium Receiver Large Receiver Extractor Hydraulic Insert Threaded Bolt Threaded Insert Dana 44 Axle - Ball Joint Installer Dana 44 Axle - Ball Joint Remover (large) Dana 44 Axle - Ball Joint Remover (small) 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
90200				Ball Joint Press 2wd & 4wd ball joint press easily removes and installs press fit ball joints. Use it to press universal joints without damaging other components. It will also press plastic pin GM U-joints. 
90360 90361 90363 90364 90365 90366 90367 90369 90370 90371 90372				Axle correction set. Designed to bend Ford twin beam axles to correct camber. Complete Set Straight Pin Work Beam Ram Seal Ram Small Clevis Large Clevis Step Pin Five Pc. Spacer Block Bottom Block for the 90370 Storage Box  Limited Supply Available. All Parts To Be Discontinued When Stock Is Depleted.
91051				Round Bit Tool holders for most brake lathes. 
91052				The new round bit tool holder for the FMC and Accuturn brake lathe 
91053				Negative rake brake lathe bit for: Bear disc 1478, drum 1410, 1467, 1468, 1469. 
91054				Hoffman/RJ West: 815, 915 disc negative rake bit. 
91055				Ammco: Standard grade unground bit for Models: 7700, 7000, 4100, 4000, 3850, 3000, 1001, 1000, 710 negative rake. 
91057				Ammco: Positive rake models 7700, 7000, 4100, 3850, 3000, 2002, 6900, 9381. Pro-Cut/VGB: 29005 
91058				Positive rake carbide bit. Rels: 204C, 205D, 204S, 205DC, 415. Van Norman: 204D, 204C, 204S, 205DC, 415. 
91059				Positive rake carbide bit. Rels: 204C, 204D, 204S, 205DC, 415. Van Norman: 204D, 204C, 204S, 205DC, 415. 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
91060				Rel: positive rake carbide bit SW504, 15 & 90 degree swing arm lathes. Kwik-Way/Snap On: SDL, DI, 850, disc & rotunda on the car lathes 108-0005-04. 
91062				Adjustable drum silencer belt for passenger cars, 1-3/4" wide. 
91064				Adjustable heavy duty truck drum silencer belt 2-3/4" wide. 
91065				Adjustable weighted silencer belt for passenger car ventilated rotors. 
91066				Universal vented rotor silencer band fits 6" to 9" diameter rotors. 
92010				Small Diameter Lock Remover  
92015				GM F & N Body, Corvette Lock Remover   
92020				Large Diameter Lock Remover  
92030				GM/Chrysler Lock Remover  
92040				Ford/Merc./Chrysler Lock Remover  

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
92050				GM C & D Body Lock Remover  <i>Example of Lock</i>
92060				GM A, J, N & X Body Lock Remover  <i>Example of Lock</i>
92080				Inner Budd Nut Remover Inner budd nuts are used to retain the inside wheel on highway rig dual axles. Often they strip out, making removal impossible. The 92080 allows for fast tire changes and wheel service on time-conscious, heavy-duty over the road commercial tractor/trailers. Simply pound the No. 92080 on, unscrew and punch out the budd nut. 
92288				GM Truck Knock Out Plug Remove for knock out plugs with the hole offset. The 92288 allows GM control arm plugs to be removed without the tool rotating during use! This new design should be used on 1989 and up GM 4x4 & 4x2 1/2, 3/4, and 1 ton vehicles as well as 1990 and up Chevrolet Astro Van and GMC Safari Vans. 
92300				Camber-Kwik Gauge Easy and fast camber change gauge! Every shop should have the Camber-Kwik gauge for fast and easy adjustments. Just snap the magnetic head onto the spindle or rotor for Kwik camber adjustments up to $\pm 3\text{-}1/2^\circ$. 
92530				Ford 4wd Caster/Camber Sleeve Puller Removes seized and rusted bushings and pulls most aftermarket & OE bushings on Ford Vans & Pickups. Two horseshoe adapters are used to pull most bushings with removable retaining rings. 
92532				Ball Joint Thread Protector Simply remove the cotter pin and ball joint nut from any full size Ford 4X4, and screw on the 92532 by hand. Strike the top of the 92532 to release the taper between the ball joint and the bushing. Then continue striking the 92532 until the bushing releases from the spindle. 
92600				5pc Adjusting/Alignment Wrench Set. This set includes one of each of the 92610, 92615, 92620, 92625 and 92630. 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
92610				Ford Caster/Camber Adjusting Wrench This wrench is specially bent to fit on the bolt and nut for adjusting cam to adjust caster/camber found on Ford pickups & Explorers. 
92615				Aerostar Upper Arm Alignment Wrench 12 point 1-3/16" wrench for use on 1985-up Ford Aerostar Vans 
92620				22mm Upper Arm Alignment Wrench 12 point 22mm wrench fits 1990-up 2wd & 1991-up AWD Chevy Astro & Safari 
92625				3/4" Upper Arm Alignment 12mm 3/4" wrench services 1973-87 Chevy Pickups, 1985-up Canadian made GM Astro & Safari Vans. 
92630				18mm Upper Arm Alignment Wrench 12 point 18mm wrench works on US made 1985-up newer GM Astro Vans. 
92635				Caster & Camber Wrench This wrench works on most Ford & Chrysler vehicles for adjustment of caster & camber. Improved design allows getting around obstructing components under the hood. 
92640				GM10 Strut Tool Removes & installs GM10 (W-body) model MacPherson strut cartridge through the strut tower. Includes a T-50 bit, spanner & 1/2" drive handle. 
92650				Chrysler "LH" Models Tie Rod Socket A special offset socket allows easy access to sleeve nuts and breaks loose even the most stubborn tie rod sleeve jam nuts. 
92655				Chrysler "LH" Models Sleeve Adjusting Tool This specially designed tool has a hardened tab to fit into the slot of the tie rod sleeve and an inside diameter machined to match the sleeve. 
92660				Ford Tie Rod End Tool This tool is designed for use on the Newer Ford Super Duty along with other light trucks and vans. The 8 position design allows 360° rotation without removing the adjuster from the sleeve. 
92895				5/16" Spot Weld Cutter 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
92900				3/8" Spot Weld Cutter 1986-97 Ford Taurus and Taurus Wagon 1988-94 Lincoln Continental 1986-97 Mercury Sable Sedan and Sable Wagon 1995-97 Ford Windstar 
92979				Threaded Bushing Extractor/Installer The No. 92979 is required for removal or installation of 4X4 threaded ball joint bushings. Socket fits snugly over ball joint stud and into the threaded hole in axle. Tight fitting design helps hold ball joint stud vertical during installation and retorquing of the threaded ball joint bushings. 
92970				Threaded Bushing Extractor/Installer The 92970 is the ONLY bushing removal tool that assures consistent contact between the tool and bushing during removal. Regular "spanner" wrenches can slip out of the bushing slots causing rounding of both the bushing and the tool. 
93000 93020 93021 93022 93023 93024 93025 93026 93027 93028 93030 93031 93040 93041				Acura RSX 2002-04 Honda Civic 1996-00 Honda Civic 1992-95 Honda Civic SI 2002-05 Acura Integra 1994-01, Honda Civic 1994-95 Honda Prelude non-SH model 1997-02, Honda Prelude SH model 1997-02 Mitsubishi Lancer/EVO 2000-06 Honda Civic 2001-05 (except SI model) Scion TC 2005-06 Ford Focus 2000-04 Acura RSX Type S 2005-06 Pontiac GTO 2004 Chevrolet Cobalt 2005-06 Honda Accord 1998-06  Engine Torque Damper Dramatically improves off the line acceleration. Minimizes wheel hop. Greatly improves vehicle stability. Relieves shock loads on driveline components compared to straps and chains. Reduces shock loads when tires lose and regain traction during drifting. Promotes Smoother shifting. Decreases wear on exhaust system joints. Controls vibration transmission to the driver compared to polyurethane motor mounts. Reduces shock loads when tires lose and regain traction during drifting.
93180				PowerStick™ with Rubber Bushings Subaru Legacy, Impreza WRX, Impreza WR: 
93181				PowerStick™ with Polyurethane Bushings Subaru Legacy, Impreza WRX, Impreza WRX Not Recommend for Street Use! 

Part Number	Adj. Range/ Thickness	Est. Time hrs/side	Required per/whl	Description Applications/Illustration
93300				Rear Strut Brace 2005-06 Ford Mustang 
93301				Front Strut Brace 2005-06 Ford Mustang 
93302				Front Lower Cradle Brace 2005-06 Ford Mustang 
93304				Rear Strut Tower Brace 2005-06 Scion TC 
93305				Traction Kit Contains both the Panhard Bar kit and the Lower Trailing Arms 2005-06 Ford Mustang 
93306				Panhard Bar Kit 2005-06 Ford Mustang 

SPC Part Number	Ingalls Direct Cross	Ingalls Application Number	Catalog Page Number
00080	91062	—	142
00081	91064	—	142
00094	91070	—	—
00096	91071	—	—
00098	91065	—	142
00099	91072	—	—
00195	91066	—	142
801	34801	—	113
802	34802	—	113
803	34803	—	113
804	34804	—	113
805	34805	—	113
806	34806	—	113
807	34807	—	113
808	34808	—	113
809	34809	—	113
810	34810	—	113
842	34842	—	113
843	34843	—	113
844	34844	—	113
845	34845	—	113
846	34846	—	113
847	34847	—	113
848	34848	—	113
851	34851	—	113
852	34852	—	113
853	34853	—	113
854	34854	—	113
855	34855	—	113
856	34856	—	113
857	34857	—	113
858	34858	—	113
861	34861	—	113
862	34862	—	113
863	34863	—	113
864	34864	—	113
865	34865	—	113
866	34866	—	113
867	34867	—	113
868	34868	—	113
891	34951	—	114
892	34952	—	114
893	34953	—	114
894	34954	—	114
895	34955	—	114
896	34956	—	114
897	34957	—	114
898	34958	—	114
06010	91058	—	141
06210	91056	—	141
06700	91051	—	141
7250	90200	—	141
7250	92645	—	—
7365	92635	—	144
8113	92300	—	143
09800	91067	—	—
10306	91055	—	141
10408	29900	—	—
23001	—	23001	108
23002	—	23002	108
23003	—	23003	108
23004	—	23004	108
23005	—	23005	108
23006	—	23006	108
23007	—	23007	108
23008	—	23008	108
23009	—	23009	108
23010	—	23010	108
23011	—	23011	108
23012	—	23012	108
23021	Discontinued	—	—
23022	Discontinued	—	—
23023	Discontinued	—	—
23024	Discontinued	—	—
23025	Discontinued	—	—
23026	Discontinued	—	—
23027	Discontinued	—	—
23101	23101	—	108
23102	23102	—	108
23103	23103	—	108
23104	23104	—	108

SPC Part Number	Ingalls Direct Cross	Ingalls Application Number	Catalog Page Number
23105	23105	—	108
23106	23106	—	108
23107	23107	—	108
23108	23108	—	108
23109	23109	—	108
23111	23111	—	108
23112	23112	—	108
23113	23113	—	108
23121	23121	—	108
23122	23122	—	108
23123	23123	—	108
23124	23124	—	108
23125	23125	—	108
23126	23126	—	108
23127	23127	—	108
23128	23128	—	108
23129	23129	—	108
23131	23101	—	108
23132	23102	—	108
23133	23103	—	108
23134	23104	—	108
23135	23105	—	108
23136	23106	—	108
23141	—	43201	133
23142	—	43202	133
23143	—	43203	133
23145	—	43204	133
23148	—	43206	133
23154	43501	—	133
23155	43502	—	133
23156	43503	—	133
23157	43504	—	133
23158	43505	—	133
23161	23161	—	108
23162	23162	—	108
23163	23163	—	108
23164	23164	—	108
23165	23165	—	108
23166	23166	—	108
23167	23167	—	108
23168	23168	—	108
23181	23181	—	108
23182	23182	—	108
23183	23183	—	108
23184	23184	—	108
23185	23185	—	108
23186	23186	—	108
23187	23187	—	108
23188	23188	—	108
23189	23189	—	108
23190	23190	—	108
23191	23191	—	108
23192	23192	—	108
23193	23193	—	108
23194	23194	—	108
23199	23199	—	108
23211	23211	—	109
23212	23212	—	109
23221	23221	—	109
23222	23222	—	109
23223	23223	—	109
23224	23224	—	109
23225	23225	—	109
23226	23226	—	109
23227	23227	—	109
23228	23228	—	109
23231	23231	—	109
23232	23232	—	109
23233	23233	—	109
23234	23234	—	109
23235	23235	—	109
23236	23236	—	109
23237	23237	—	109
23238	23238	—	109
23239	23239	—	109
23268	23268	—	109
23269	23269	—	109
23413	—	43208	133
23510	23510	61000	109
23520	23520	61000	109
23530	23530	61000	109

SPC Part Number	Ingalls Direct Cross	Ingalls Application Number	Catalog Page Number
23540	23540	61000	109
23710	23710		109
23720	23720		109
23730	23730		109
23755	—	28600	110
23765	—	28600	110
23800	23800		109
23810	23810		109
23820	23820		109
23830	23830		109
24120	53500	—	134
24130	53200	—	134
24180	59400	—	134
35001	70243	—	136
35002	70244	—	136
35003	70245	—	136
35004	70246	—	136
35005	70247	—	136
35006	70248	—	136
35007	70249	—	136
35010	70210	—	135
35011	70211	—	135
35012	70212	—	135
35020	70220	—	135
35021	70221	—	135
35022	70222	—	135
35030	70230	—	135
35031	70231	—	135
35032	70232	—	135
35040	70240	—	136
35040	70255	—	136
35041	70241	—	136
35041	70256	—	136
35042	70242	—	136
35042	70257	—	136
35050	70200	—	135
35051	70201	—	135
35052	70202	—	135
35060	70215	—	135
35061	70216	—	135
35062	70217	—	135
35070	70225	—	135
35071	70226	—	135
35071	70227	—	135
37100	34000	—	113
37101	34010	—	113
37102	34020	—	113
37103	34030	—	113
37104	34040	—	113
37105	34050	—	113
37106	34060	—	113
37107	34070	—	113
38306	91053	—	141
41000	15125	—	104
41550	92530	—	143
45350	92640	—	144
47240	34240	—	113
47241	34241	—	113
47242	34242	—	113
47500	Discontinued	—	—
47765	Discontinued	—	—
47766	Discontinued	—	—
47767	Discontinued	—	—
47768	Discontinued	—	—
47770	Discontinued	—	—
47771	Discontinued	—	—
47772	Discontinued	—	—
47773	Discontinued	—	—
47775	Discontinued	—	—
47776	Discontinued	—	—
47777	Discontinued	—	—
50206	91054	—	141
53000	—	26126	110
53000	—	60000	134
53001	—	26126	110
53001	—	26126	110
53001	—	60000	134
53002	—	26126	110
53002	—	26126	110
53002	—	60000	134
53003	—	26126	110

SPC Part Number	Ingalls Direct Cross	Ingalls Application Number	Catalog Page Number
53003	—	26126	110
53003	—	60000	134
53004	—	26126	110
53004	—	26126	110
53004	—	60000	134
53005	—	26126	110
53005	—	26126	110
53005	—	60000	134
53006	—	26126	110
53006	—	26126	110
53006	—	60000	134
53006	—	26126	110
53007	—	26126	110
53007	—	60000	134
53007	—	26126	110
53008	—	26126	110
53008	—	26126	110
53008	—	60000	134
53009	—	26126	110
53009	—	26126	110
53009	—	60000	134
53010	—	26126	110
53010	—	26126	110
53010	—	60000	134
53011	—	26126	110
53011	—	26126	110
53011	—	60000	134
56800	—	26126	110
56800	—	26128	110
56801	—	26126	110
56801	—	26128	110
56802	—	26126	110
56802	—	26128	110
56803	—	26126	110
56803	—	26128	110
56804	—	26126	110
56804	—	26128	110
56805	—	26126	110
56805	—	26128	110
56806	—	26126	110
56806	—	26128	110
56807	—	26126	110
56807	—	26128	110
56808	—	26126	110
56808	—	26128	110
56809	—	26126	110
56809	—	26128	110
56810	—	26126	110
56810	—	26128	110
56811	—	26126	110
56811	—	26128	110
62010	—	39100	130
62010	—	39110	131
62030	—	39100	130
62030	—	39110	131
67010	38270	—	125
67010	38320	—	125
67020	38170	—	124
67030	38920	—	129
67045	84200	—	137
67050	Discontinued	—	—
67060	Discontinued	—	—
67070	38220	—	124
67080	38180	—	124
67090	—	38720	127
67125	—	39203	132
67125	—	39204	132
67125	35590	—	116
67135	—	35580	115
67135	35592	—	116
67145	35594	—	117
67155	35596	—	117
67165	35598	—	117
67170	35620	—	118
67180	35622	—	118
67230	38970	—	129
67265	—	38811	128
67265	—	38812	128
67265	38831	—	128
67265	38832	—	128
67290	38725	—	127
67320	—	39207	132

SPC Part Number	Ingalls Direct Cross	Ingalls Application Number	Catalog Page Number
67320	—	39208	132
67320	35591	—	116
67330	35570	—	115
67330	35593	—	116
67340	35595	—	117
67350	35597	—	117
67360	35599	—	117
67370	35621	—	118
72210	Discontinued	—	—
72215	Discontinued	—	—
72220	Discontinued	—	—
72230	Discontinued	—	—
72310	Discontinued	—	—
72315	Discontinued	—	—
72320	Discontinued	—	—
72330	Discontinued	—	—
72370	35350	—	115
72410	Discontinued	—	—
72415	Discontinued	—	—
72420	Discontinued	—	—
72430	Discontinued	—	—
72810	Discontinued	—	—
72815	Discontinued	—	—
72820	Discontinued	—	—
72830	Discontinued	—	—
73600	35850	—	121
73600	35860	—	121
73620	35860	—	121
74910	92288	—	143
75200	—	30000	111
75200	—	32100	112
75400	—	30100	111
75400	—	30300	111
75400	—	32300	112
75800	—	30200	111
75800	—	31501	112
75800	—	31502	112
75800	—	31503	112
75800	—	31504	112
75800	—	31901	112
75800	—	31902	112
75800	—	31903	112
75800	—	31904	112
75800	—	32400	113
77350	92660	—	144
80210	91060	—	142
81250	81250	—	137
81260	—	38510	126
81260	81260	—	137
81270	81270	—	137
81280	81280	—	137
81286	35040	—	114
81290	81290	—	137
81310	—	36400	122
81320	36350	—	122
81340	—	35655	118
82110	35100	—	114
82120	35100	—	114
83120	35150	—	114
83130	35200	—	114
83135	35220	—	114
83140	35120	—	114
83140	35120	—	114
83150	35270	—	—
83160	35300	—	115
83170	—	35220	114
83450	—	81250	137
83460	—	81260	137
83470	—	81270	137
83470	—	81280	137
83490	—	81290	137
83500	35180	—	—
83790	28800	—	110
84300	38100	—	123
84510	—	35410	115
84510	36201	—	—
84520	—	35420	115
84520	36205	—	—
84530	—	35440	115
84530	36212	—	—
84560	—	38930	129

SPC Part Number	Ingalls Direct Cross	Ingalls Application Number	Catalog Page Number
84570	—	38930	129
84580	—	38930	129
84600	Discontinued	—	—
84650	Discontinued	—	—
84660	—	38940	129
84670	—	38940	129
84680	—	38940	129
84700	—	35700	119
84800	—	35700	119
84945	—	35700	119
84955	—	35720	120
85200	—	35550	—
85690	—	34600	113
85695	—	34600	113
85790	92895	—	144
85790	92900	—	145
86140	—	29600	111
86180	—	29700	111
87130	92615	—	144
87135	92625	—	144
87140	92630	—	144
87145	92620	—	144
87155	92610	—	144
87225	40360	—	133
87270	84960	—	139
87300	—	38500	126
87310	29100	—	110
87330	—	37000	123
87330	—	37000	123
87330	—	38500	126
87340	—	37050	123
87350	35250	—	114
87385	29200	—	111
87400	—	28800	110
87460	—	35750	120
87500	29000	—	110
87580	—	35750	120
87590	—	35770	121
88901	Discontinued	—	—
88905	Discontinued	—	—
88906	Discontinued	—	—
88940	—	60000	134
88950	—	60000	134
89605	36800	—	123
89610	36700	—	122
89625	—	36260	122
89625	—	36750	122
89625	—	36760	122
89635	36250	—	122
89685	36260	—	122
90310	91059	—	141
62030R	Discontinued	—	—
62030YL	Discontinued	—	—
82030BL	—	39101	130

Ingalls Part #	List Price	Adjustment Range	Description Number	Page
15120	\$266.08	—	Wheel & Hub Cap Lock Removers	104
15125	\$153.61	—	Wheel & Hub Cap Lock Removers	104
15500	\$931.59	—	Alignment Starter Kit	104
16000	\$1,172.38	—	Complete with Springs, Stiffy™, & Camber Kits	105
16000-1	\$387.10	—	Set of 4 Springs, lowers the car 1.6" (40mm)	105
16001	\$1,128.50	—	Complete with Springs, Stiffy™, & Camber Kits	105
16001-1	\$413.92	—	Set of 4 Springs, lowers the car 1.6" (40mm)	105
16002-1	\$387.10	—	Set of 4 Springs, lowers the car 1.4" (35mm)	105
16002	\$1,062.71	—	Complete with Springs, Stiffy™, & Camber Kits	105
16003	\$1,183.15	—	Complete with Springs, Stiffy™, & Camber Kits	105
16003-1	\$387.10	—	Set of 4 Springs, lowers the car 1.4" (35mm)	105
16004	\$944.79	—	Complete with Springs, Stiffy™, & Camber Kits	105
16004-1	\$387.10	—	Set of 4 Springs, lowers the car 1.4" (35mm)	105
16005	\$944.79	—	Complete with Springs, Stiffy™, & Camber Kits	105
16006	\$1,122.00	—	Complete with Springs, Stiffy™, & Camber Kits	106
16006-1	\$387.10	—	Set of 4 Springs, lowers the car 1.6" (40mm)	106
16007	\$944.79	—	Complete with Springs, Stiffy™, & Camber Kits	106
16007-1	\$387.10	—	Set of 4 Springs, lowers the car 1.6" (40mm)	106
16008	tba	—	Complete with Springs, Stiffy™, & Camber Kits	106
16008-1	\$387.10	—	Set of 4 Springs, lowers the car 1.6" (40mm)	106
16009	tba	—	See Kit Section For Complete Description	106
16009-1	\$426.58	—	Set of 4 Springs, lowers the car 1.6" (40mm)	106
16011	\$944.79	—	Complete with Springs, Stiffy™, & Camber Kits	107
16012	\$944.79	—	Complete with Springs, Stiffy™, & Camber Kits	107
17000	\$385.71	—	Complete Steel Braided Brake Line Kit	107
17001	\$253.48	—	Steel Braided Brake Line Kit	107
17002	\$51.84	—	Steel Braided Clutch Line Kit	107
23001	\$28.64	± 1/8"	Offset Camber/Caster Sleeve	108
23002	\$28.64	± 1/4"	Offset Camber/Caster Sleeve	108
23003	\$28.64	± 3/8"	Offset Camber/Caster Sleeve	108
23004	\$28.64	± 1/2"	Offset Camber/Caster Sleeve	108
23005	\$28.64	± 5/8"	Offset Camber/Caster Sleeve	108
23006	\$28.64	± 3/4"	Offset Camber/Caster Sleeve	108
23007	\$28.64	± 7/8"	Offset Camber/Caster Sleeve	108
23008	\$28.64	± 1"	Offset Camber/Caster Sleeve	108
23009	\$28.64	± 1-1/8"	Offset Camber/Caster Sleeve	108
23010	\$28.64	± 1-1/4"	Offset Camber/Caster Sleeve	108
23011	\$28.64	± 1-3/8"	Offset Camber/Caster Sleeve	108
23012	\$28.64	± 1-1/2"	Offset Camber/Caster Sleeve	108
23101	\$32.86	± 1/4"	OE Style Offset Camber/Caster Bushing	108
23102	\$32.86	± 1/2"	OE Style Offset Camber/Caster Bushing	108
23103	\$32.86	± 3/4"	OE Style Offset Camber/Caster Bushing	108
23104	\$32.86	± 1"	OE Style Offset Camber/Caster Bushing	108
23105	\$32.86	± 1-1/4"	OE Style Offset Camber/Caster Bushing	108
23106	\$32.86	± 1-1/2"	OE Style Offset Camber/Caster Bushing	108
23107	\$32.86	± 1-3/4"	OE Style Offset Camber/Caster Bushing	108
23108	\$32.86	± 2"	OE Style Offset Camber/Caster Bushing	108
23109	\$32.86	0°	OE Style Offset Camber/Caster Bushing	108
23111	\$32.86	± 2-1/4"	OE Style Offset Camber/Caster Bushing	108
23112	\$32.86	± 2-1/2"	OE Style Offset Camber/Caster Bushing	108
23113	\$32.86	± 2-3/4"	OE Style Offset Camber/Caster Bushing	108
23121	\$32.21	± 1/4"	OE Style Offset Camber/Caster Bushing	108
23122	\$32.21	± 1/2"	OE Style Offset Camber/Caster Bushing	108
23123	\$32.21	± 3/4"	OE Style Offset Camber/Caster Bushing	108
23124	\$32.21	± 1"	OE Style Offset Camber/Caster Bushing	108
23125	\$32.21	± 1-1/4"	OE Style Offset Camber/Caster Bushing	108
23126	\$32.21	± 1-1/2"	OE Style Offset Camber/Caster Bushing	108
23127	\$32.21	± 1-3/4"	OE Style Offset Camber/Caster Bushing	108
23128	\$32.21	± 2"	OE Style Offset Camber/Caster Bushing	108
23129	\$32.21	0°	OE Style Offset Camber/Caster Bushing	108
23131	\$32.21	± 1/4"	OE Style Offset Camber/Caster Bushing	108
23132	\$32.21	± 1/2"	OE Style Offset Camber/Caster Bushing	108
23133	\$32.21	± 3/4"	OE Style Offset Camber/Caster Bushing	108
23134	\$32.21	± 1"	OE Style Offset Camber/Caster Bushing	108
23135	\$32.21	± 1-1/4"	OE Style Offset Camber/Caster Bushing	108
23136	\$32.21	± 1-1/2"	OE Style Offset Camber/Caster Bushing	108
23137	\$32.21	± 1-3/4"	OE Style Offset Camber/Caster Bushing	108
23138	\$32.21	± 2"	OE Style Offset Camber/Caster Bushing	108
23139	\$32.21	0°	OE Style Offset Camber/Caster Bushing	108
23161	\$20.14	± 1/4"	OE Style Offset Camber Bushing	108
23162	\$20.14	± 1/2"	OE Style Offset Camber Bushing	108
23163	\$20.14	± 3/4"	OE Style Offset Camber Bushing	108
23164	\$20.14	± 1"	OE Style Offset Camber Bushing	108
23165	\$20.14	± 1-1/4"	OE Style Offset Camber Bushing	108
23166	\$20.14	± 1-1/2"	OE Style Offset Camber Bushing	108
23167	\$20.14	± 1-3/4"	OE Style Offset Camber Bushing	108
23168	\$20.14	± 2"	OE Style Offset Camber Bushing	108
23181	\$18.95	± 1/4"	OE Style Offset Camber/Caster Bushing	108
23182	\$18.95	± 1/2"	OE Style Offset Camber/Caster Bushing	108
23183	\$18.95	± 3/4"	OE Style Offset Camber/Caster Bushing	108
23184	\$18.95	± 1"	OE Style Offset Camber/Caster Bushing	108
23185	\$18.95	± 1-1/4"	OE Style Offset Camber/Caster Bushing	108
23186	\$18.95	± 1-1/2"	OE Style Offset Camber/Caster Bushing	108
23187	\$18.95	± 1-3/4"	OE Style Offset Camber/Caster Bushing	108
23188	\$18.95	± 2"	OE Style Offset Camber/Caster Bushing	108
23189	\$18.95	± 2-1/4"	OE Style Offset Camber/Caster Bushing	108
23190	\$18.95	± 2-1/2"	OE Style Offset Camber/Caster Bushing	108
23191	\$20.78	± 2-3/4"	OE Style Offset Camber/Caster Bushing	108
23192	\$20.78	± 3"	OE Style Offset Camber/Caster Bushing	108
23193	\$20.78	± 3-1/4"	OE Style Offset Camber/Caster Bushing	108
23194	\$20.78	± 3-1/2"	OE Style Offset Camber/Caster Bushing	108
23199	\$18.95	0°	OE Style Offset Camber/Caster Bushing	108
23211	\$36.26	± 2-1/4"	OE Style Offset Camber/Caster Bushing	109
23212	\$36.26	± 2-1/2"	OE Style Offset Camber/Caster Bushing	109
23221	\$32.86	± 1/4"	OE Style Offset Camber/Caster Bushing	109
23222	\$32.86	± 1/2"	OE Style Offset Camber/Caster Bushing	109

Ingalls Part #	List Price	Adjustment Range	Description Number	Page
23223	\$32.86	± 3/4"	OE Style Offset Camber/Caster Bushing	109
23224	\$32.86	± 1"	OE Style Offset Camber/Caster Bushing	109
23225	\$32.86	± 1-1/4"	OE Style Offset Camber/Caster Bushing	109
23226	\$32.86	± 1-1/2"	OE Style Offset Camber/Caster Bushing	109
23227	\$32.86	± 1-3/4"	OE Style Offset Camber/Caster Bushing	109
23228	\$32.86	± 2"	OE Style Offset Camber/Caster Bushing	109
23229	\$32.86	0°	OE Style Offset Camber/Caster Bushing	109
23231	\$32.86	± 1/4"	OE Style Offset Camber/Caster Bushing	109
23232	\$32.86	± 1/2"	OE Style Offset Camber/Caster Bushing	109
23233	\$32.86	± 3/4"	OE Style Offset Camber/Caster Bushing	109
23234	\$32.86	± 1"	OE Style Offset Camber/Caster Bushing	109
23235	\$32.86	± 1-1/4"	OE Style Offset Camber/Caster Bushing	109
23236	\$32.86	± 1-1/2"	OE Style Offset Camber/Caster Bushing	109
23237	\$32.86	± 1-3/4"	OE Style Offset Camber/Caster Bushing	109
23238	\$32.86	± 2"	OE Style Offset Camber/Caster Bushing	109
23239	\$32.86	0°	OE Style Offset Camber/Caster Bushing	109
23268	\$45.07	+1/2"	OE Style Offset Camber/Caster Bushing	109
23500	\$152.35	0°	Offset Ball Joint	109
23510	\$152.35	± 1/2°	Offset Ball Joint	109
23520	\$152.35	± 1°	Offset Ball Joint	109
23530	\$152.35	± 1-1/2°	Offset Ball Joint	109
23540	\$152.35	± 2°	Offset Ball Joint	109
23700	\$189.76	0°	OE Style Ball Joint	109
23710	\$189.76	± 1/2°	Offset Ball Joint	109
23720	\$189.76	± 1°	Offset Ball Joint	109
23730	\$189.76	± 1-1/2°	Offset Ball Joint	109
23800	\$180.75	0°	OE Style Ball Joint	109
23810	\$180.75	± 1/2°	Offset Ball Joint	109
23820	\$180.75	± 1°	Offset Ball Joint	109
23830	\$180.75	± 1-1/2°	Offset Ball Joint	109
25100	\$33.13	—	Nissan Camber/Caster Shims 1mm thick	110
25200	\$33.13	—	Nissan Camber/Caster Shims 2mm thick	110
25400	\$33.15	—	Nissan Camber/Caster Shims 4mm thick	110
26126	\$42.35	1/8" to 1-1/2"	Adjustable Camber Shim - 6 bolt spindle	110
26128	\$42.35	1/8" to 1-1/2"	Adjustable Camber Shim - 8 bolt spindle	110
28600	\$49.66	± 2-3/4"	Upper Control Arm Adjusting Plate	110
28700	\$79.06	—	Ford Exp/Nav. Rear Kit	—
28710	\$88.28	—	Ford Exp/Nav. Front Kit	—
28800	\$34.63	± 2-1/4"	Camber/Caster Adjusting Bolts (2 bolts)	110
29000	\$38.03	± 2-1/4"	Camber/Caster Adjusting Bolts (2 bolts)	110
29100	\$24.70	± 2-1/4"	Camber/Caster Adjusting Washers	110
29200	\$38.78	± 2-1/4"	Camber/Caster Adjusting Bolts (2 bolts)	111
29600	\$54.33	±1°	Adjustable Control Arm Mounting Washers	111
29700	\$26.43	±1°	Adjustable Rear Control Arm Washers	111
30000	\$15.63	± 1-1/2°	Fully Adjustable Rear Camber/Toe Shim	111
30100	\$15.63	± 1-1/2°	Fully Adjustable Rear Camber/Toe Shim	111
30200	\$15.63	± 1-1/2°	Fully Adjustable Rear Camber/Toe Shim	111
30300	\$15.63	± 1-1/2°	Fully Adjustable Rear Camber/Toe Shim	111
31001	\$12.52	± 1/4°	Full Contact Rear Camber/Toe Shim	111
31002	\$12.52	± 1/2°	Full Contact Rear Camber/Toe Shim	111
31003	\$12.52	± 3/4°	Full Contact Rear Camber/Toe Shim	111
31004	\$12.52	± 1°	Full Contact Rear Camber/Toe Shim	111
31005	\$12.52	± 1-1/4°	Full Contact Rear Camber/Toe Shim	111
31006	\$12.52	± 1-1/2°	Full Contact Rear Camber/Toe Shim	111
31101	\$12.52	± 1/4°	Full Contact Rear Camber/Toe Shim	111
31102	\$12.52	± 1/2°	Full Contact Rear Camber/Toe Shim	111
31103	\$12.52	± 3/4°	Full Contact Rear Camber/Toe Shim	111
31104	\$12.52	± 1°	Full Contact Rear Camber/Toe Shim	111
31105	\$12.52	± 1-1/4°	Full Contact Rear Camber/Toe Shim	111
31106	\$12.52	± 1-1/2°	Full Contact Rear Camber/Toe Shim	111
31121	\$16.70	± 1/4°	Full Contact Rear Camber/Toe Shim	112
31122	\$16.70	± 1/2°	Full Contact Rear Camber/Toe Shim	112
31123	\$16.70	± 3/4°	Full Contact Rear Camber/Toe Shim	112
31124	\$16.70	± 1°	Full Contact Rear Camber/Toe Shim	112
31201	\$12.52	± 1/4°	Full Contact Rear Camber/Toe Shim	112
31202	\$12.52	± 1/2°	Full Contact Rear Camber/Toe Shim	112
31203	\$12.52	± 3/4°	Full Contact Rear Camber/Toe Shim	112
31204	\$12.52	± 1°	Full Contact Rear Camber/Toe Shim	112
31205	\$12.52	± 1-1/4°	Full Contact Rear Camber/Toe Shim	112
31206	\$12.52	± 1-1/2°	Full Contact Rear Camber/Toe Shim	112
31301	\$12.52	± 1/4°	Full Contact Rear Camber/Toe Shim	112
31302	\$12.52	± 1/2°	Full Contact Rear Camber/Toe Shim	112
31303	\$12.52	± 3/4°	Full Contact Rear Camber/Toe Shim	112
31304	\$12.52	± 1°	Full Contact Rear Camber/Toe Shim	112
31305	\$12.52	± 1-1/4°	Full Contact Rear Camber/Toe Shim	112
31306	\$12.52	± 1-1/2°	Full Contact Rear Camber/Toe Shim	112
31501	\$12.52	± 1/4°	Full Contact Rear Camber/Toe Shim	112
31502	\$12.52	± 1/2°	Full Contact Rear Camber/Toe Shim	112
31503	\$12.52	± 3/4°	Full Contact Rear Camber/Toe Shim	112
31504	\$12.52	± 1°	Full Contact Rear Camber/Toe Shim	112
31520	\$13.22	.13°	VW Rear Camber Shim .13°	112
31521	\$13.22	.25°	VW Rear Camber Shim .25°	112
31522	\$13.22	.38°	VW Rear Camber Shim .38°	112
31523	\$13.22	.50°	VW Rear Camber Shim .50°	112
31530	\$13.22	+1/2°	VW Rear Toe Shim +1/2°	112
31531	\$13.22	+1°	VW Rear Toe Shim +1°	112
31532	\$13.22	-1/2°	VW Rear Toe Shim -1/2°	112
31533	\$13.22	-1°	VW Rear Toe Shim -1°	112
31901	\$44.56	1/4°	Full Contact Rear Camber/Toe Shim	112
31902	\$44.56	1/2°	Full Contact Rear Camber/Toe Shim	112
31903	\$44.56	3/4°	Full Contact Rear Camber/Toe Shim	112
31904	\$44.56	1°	Non adjustable/No adjustment needed	112
32100	\$14.93	0° to 1-1/2°	Adjustable Full Contact Camber/Toe Shim	112
32200	\$14.93	0° to 1-1/2°	Adjustable Full Contact Camber/Toe Shim	112
32300	\$14.93	0° to 1-1/2°	Adjustable Full Contact Camber/Toe Shim	112
32400	\$14.93	0° to 1-1/2°	Adjustable Full Contact Camber/Toe Shim	113

Ingalls Part #	List Price	Adjustment Range	Description Number	Page
34000	\$9.99	—	Universal Slotted Camber/Caster Shim 1/64"	113
34010	\$9.64	—	Universal Slotted Camber/Caster Shim 1/32"	113
34020	\$14.39	—	Universal Slotted Camber/Caster Shim 1/16"	113
34030	\$13.17	—	Universal Slotted Camber/Caster Shim 1/8"	113
34040	\$9.07	—	Universal Slotted Camber/Caster Shim 1/64"	113
34050	\$9.46	—	Universal Slotted Camber/Caster Shim 1/32"	113
34060	\$12.58	—	Universal Slotted Camber/Caster Shim 1/16"	113
34070	\$14.61	—	Universal Slotted Camber/Caster Shim 1/8"	113
34500	\$48.58	—	Torque Arm Shim 1/32"	113
34510	\$48.58	—	Torque Arm Shim 1/16"	113
34520	\$53.48	—	Torque Arm Shim 1/8"	113
34600	\$7.33	—	Front Caster Shims	113
34801	\$6.68	—	Caster Wedge	113
34802	\$6.79	—	Caster Wedge	113
34803	\$7.08	—	Caster Wedge	113
34804	\$7.54	—	Caster Wedge	113
34805	\$8.40	—	Caster Wedge	113
34806	\$8.54	—	Caster Wedge	113
34807	\$9.61	—	Caster Wedge	113
34808	\$9.86	—	Caster Wedge	113
34810	\$10.65	—	Caster Wedge	113
34841	\$8.11	—	Caster Wedge	113
34842	\$8.86	—	Caster Wedge	113
34843	\$9.43	—	Caster Wedge	113
34844	\$10.15	—	Caster Wedge	113
34845	\$10.76	—	Caster Wedge	113
34846	\$11.22	—	Caster Wedge	113
34847	\$11.83	—	Caster Wedge	113
34848	\$12.33	—	Caster Wedge	113
34851	\$12.69	—	Caster Wedge	113
34852	\$13.29	—	Caster Wedge	113
34853	\$13.90	—	Caster Wedge	113
34854	\$14.44	—	Caster Wedge	113
34855	\$15.08	—	Caster Wedge	113
34856	\$15.69	—	Caster Wedge	113
34857	\$16.30	—	Caster Wedge	113
34858	\$17.15	—	Caster Wedge	113
34861	\$15.69	—	Caster Wedge	113
34862	\$15.94	—	Caster Wedge	113
34863	\$16.30	—	Caster Wedge	113
34864	\$17.15	—	Caster Wedge	113
34865	\$20.87	—	Caster Wedge	113
34866	\$21.12	—	Caster Wedge	113
34867	\$21.26	—	Caster Wedge	113
34868	\$21.73	—	Caster Wedge	113
34951	\$25.07	—	Caster Wedge	114
34952	\$26.47	—	Caster Wedge	114
34953	\$27.52	—	Caster Wedge	114
34954	\$29.05	—	Caster Wedge	114
34955	\$30.21	—	Caster Wedge	114
34956	\$30.58	—	Caster Wedge	114
34957	\$32.11	—	Caster Wedge	114
34958	\$32.18	—	Caster Wedge	114
35040	\$2.55	—	Fastcam Adapting Washer	114
35100	\$13.93	±2-1/4"	Adjusting Bolt for slotted struts with fence	114
35120	\$37.21	± 2-1/2"	Camber Adjusting Control Arm Bolt	114
35150	\$13.93	± 2-1/2"	Adjusting Bolt for slotted struts without fence	114
35200	\$16.22	± 2-1/2"	Camber Adjusting Strut Bolt	114
35220	\$20.32	± 2-1/2"	Camber Adjusting Strut Bolt	114
35250	\$18.62	± 2-1/2"	Camber Adjusting Control Arm Bolt	114
35300	\$17.62	± 1-1/4"	Camber Adjusting Bolt	115
35410	\$19.59	± 1°	Fastcam™ 14mm Camber Adjusting Bolt	115
35420	\$19.59	± 1°	Fastcam™ 14mm Camber Adjusting Bolt	115
35430	\$21.67	± 1°	Fastcam™ 15mm Camber Adjusting Bolt	115
35440	\$21.67	± 1°	Fastcam™ 16mm Camber Adjusting Bolt	115
35450	\$21.67	± 1°	Fastcam™ 17mm Camber Adjusting Bolt	115
35580	\$204.52	+1-3/4" to +4°	Adjustable Ball Joint	115
35590	\$166.43	-1-1/2" to +1-1/2°	Adjustable Ball Joint	116
35591	\$166.43	+1-1/2" to +3°	Adjustable Ball Joint	116
35592	\$166.43	-1-1/2" to +1-1/2°	Adjustable Ball Joint	116
35593	\$166.43	+1-1/2" to +3°	Adjustable Ball Joint	116
35594	\$166.43	± 1-1/2°	Adjustable Ball Joint	117
35595	\$166.43	+1-1/2" to +3°	Adjustable Ball Joint	117
35596	\$166.43	±1-1/2°	Adjustable Ball Joint	117
35597	\$166.43	+1-1/2" to +3°	Adjustable Ball Joint	117
35598	\$166.43	-1-1/2" to +1-1/2°	Adjustable Ball Joint	117
35599	\$166.43	+1-1/2" to +3°	Adjustable Ball Joint	117
35620	\$166.43	-1-1/2" to +1-1/2°	Adjustable Ball Joint	118
35621	\$166.43	+1-1/2" to +3°	Adjustable Ball Joint	118
35622	\$166.43	-1-1/2" to +1-1/2°	Adjustable Ball Joint	118
35640	\$65.59	-1° to +3°	Camber Adjusting Control Arm Kit	118
35650	\$65.59	-1° to +3°	Camber Adjusting Control Arm Kit	118
35655	\$135.51	± 1-1/4"	Adjustable Ball Joint Mount	118
35660	\$207.07	-3/4" to +1°	Adjustable Mounts - Brass Bushings	119
35661	\$95.25	—	Replacement Brass Bushings	119
35670	\$205.39	+1-1/4" to +3°	Adjustable Mounts - Brass Bushings	119
35690	\$215.59	+1-1/4" to +3°	Adjustable Mounts - Brass Bushings	119
35700	\$115.17	-3/4" to +1°	Adjustable Mounts - Polyurethane Bushings	119
35710	\$124.66	-3/4" to +1°	Adjustable Mounts - Rubber Bushings	120
35720	\$135.28	+1-1/4" to +3°	Adjustable Mounts - Polyurethane Bushings	120
35730	\$135.28	+1-1/4" to +3°	Adjustable Mounts - Rubber Bushings	120
35750	\$120.99	-3/4" to +1°	Adjustable Mounts - Polyurethane Bushings	120
35760	\$120.99	-3/4" to +1°	Adjustable Mounts - Rubber Bushings	120
35770	\$135.28	+1-1/4" to +3°	Adjustable Mounts - Polyurethane Bushings	121
35780	\$135.28	+1-1/4" to +3°	Adjustable Mounts - Rubber Bushings	121
35850	\$56.67	± 1°	Camber Adjusting Control Arm Mounts	121

Ingalls Part #	List Price	Adjustment Range	Description Number	Page
35860	\$78.58	-1° to +3°	Camber Adjusting Control Arm Mounts	121
35870	\$21.48	± 1°	Bolt and Spacer Kit	121
36250	\$80.96	+1-1/4°	Adjustable Front Camber Plates	122
36260	\$86.37	+1-1/4°	Adjustable Front Camber Plates	122
36350	\$100.37	± 1°	Adjustable Front Camber Plates	122
36400	\$161.51	± 1/2" to 1°	Rear Camber Shim Kit	122
36700	\$71.74	± 1°	Camber Adjusting Strut Cap	122
36750	\$86.37	± 1°	Camber Adjusting Strut Cap	122
36760	\$86.37	± 1°	Camber Adjusting Strut Cap	123
36800	\$71.20	± 1°	Camber Adjusting Strut Cap	123
37000	\$80.13	± 3/4°	Rear Camber/Toe Eccentric Bushings	123
37050	\$30.66	± 1-1/2°	Rear Toe Eccentric Bushings	123
37150	\$33.17	—	Replacement Toe Adjusting Sleeve	123
38100	\$76.63	± 2-1/4°	Subaru Caster Rod	123
38150	\$96.82	± 1°	SmartArm™ Adjustable Link (Polyurethane)	123
38170	\$99.66	± 1°	SmartArm™ Adjustable Link (Rubber)	124
38180	\$99.66	± 1°	SmartArm™ Adjustable Link (Rubber)	124
38200	\$105.89	± 2°	SmartArm™ Adjustable Link (Polyurethane)	124
38220	\$109.01	± 2°	SmartArm™ Adjustable Link (Rubber)	124
38250	\$94.71	± 1°	SmartArm™ Adjustable Link (Polyurethane)	125
38270	\$97.48	± 1°	SmartArm™ Adjustable Link (Rubber)	125
38300	\$108.79	± 1°	SmartArm™ Adjustable Link (Polyurethane)	125
38320	\$111.99	± 1°	SmartArm™ Adjustable Link (Rubber)	125
38350	\$87.02	± 2°	Caster Adjusting Strut Rod	125
38420	\$193.12	-2° to +3°	SmartArm™ Adjustable Link (Rubber)	125
38500	\$198.26	± 2°	Adjustable Lower Control Arms	126
38510	\$203.62	± 2°	Adjustable Lower Control Arms	126
38525	\$508.21	± 2°	Adjustable Rear Lower Control Arms	126
38540	\$156.36	-1° to +3°	Adjustable Camber/Toe Arms	126
38545	\$610.27	±2°	Adjustable Lower Control Arms	127
38600	\$103.64	-2° to +3°	SmartArm™ Adjustable Link (Polyurethane)	127
38620	\$103.64	-2° to +3°	SmartArm™ Adjustable Link (Rubber)	127
38720	\$156.36	-1-1/2" to +3°	SmartArm™ Adjustable Link (Rubber)	127
38725	\$156.36	-1-1/2" to +3°	SmartArm™ Adjustable Link (Rubber)	127
38811	\$191.97	-2° to +3°	SmartArm™ Adjustable LH Link (Poly)	128
38812	\$191.97	-2° to +3°	SmartArm™ Adjustable RH Link (Poly)	128
38831	\$191.97	-2° to +3°	SmartArm™ Adjustable LH Link (Rubber)	128
38832	\$191.91	-2° to +3°	SmartArm™ Adjustable RH Link (Rubber)	128
38900	\$111.98	-2° to +3°	SmartArm™ Adjustable Link (Polyurethane)	128
38920	\$115.17	-2° to +3°	SmartArm™ Adjustable Link (Rubber)	129
38930	\$16.08	+3/4"	Spacer and Bolt Kit	129
38940	\$17.48	+3/4"	Spacer and Bolt Kit	129
38950	\$129.57	-2° to +3°	SmartArm™ Adjustable Link (Polyurethane)	129
38955	\$129.57	-2° to +3°	SmartArm™ Adjustable Link (Polyurethane)	130
38970	\$132.69	-2° to +3°	SmartArm™ Adjustable Link (Rubber)	129
38975	\$132.70	-2° to +3°	SmartArm™ Adjustable Link (Rubber)	130
39100	\$209.44	-1° to +4°	Adjustable Control Arm	130
39101	\$243.20	-1° to +4°	Adjustable Control Arm	130
39102	\$243.20	-1° to +4°	Adjustable Control Arm	130
39103	\$209.44	-1° to +4°	Adjustable Control Arm	131
39104	\$243.19	-1° to +4°	Adjustable Control Arm	131
39105	\$243.19	-1° to +4°	Adjustable Control Arm	131
39110	\$214.71	-1° to +4°	Adjustable Control Arm	131
39111	\$253.46	-1° to +4°	Adjustable Control Arm	131
39112	\$253.46	-1° to +4°	Adjustable Control Arm	131
39113	\$214.72	-1° to +4°	Adjustable Control Arm	131
39114	\$248.46	-1° to +4°	Adjustable Control Arm	132
39115	\$248.46	-1° to +4°	Adjustable Control Arm	132
39203	\$301.97	-2° to +1-3/4°	Adjustable Control Arm	132
39204	\$301.97	-2° to +1-3/4°	Adjustable Control Arm	132
39207	\$301.97	+1° to +4°	Adjustable Control Arm	132
39208	\$301.97	+1° to +4°	Adjustable Control Arm	132
39250	\$340.06	± 3°	Adjustable Control Arm	132
40000	\$31.47	0°	OE Style Offset Camber/Caster Bushing	133
40001	\$31.47	± 1/4°	OE Style Offset Camber/Caster Bushing	133
40002	\$31.47	± 1/2°	OE Style Offset Camber/Caster Bushing	133
40003	\$31.47	± 3/4°	OE Style Offset Camber/Caster Bushing	133
40004	\$31.47	± 1°	OE Style Offset Camber/Caster Bushing	133
40005	\$31.47	± 1-1/4°	OE Style Offset Camber/Caster Bushing	133
40006	\$31.47	± 1-1/2°	OE Style Offset Camber/Caster Bushing	133
40007	\$31.47	± 1-3/4°	OE Style Offset Camber/Caster Bushing	133
40008	\$31.47	± 2°	OE Style Offset Camber/Caster Bushing	133
40009	\$31.47	± 2-1/4°	OE Style Offset Camber/Caster Bushing	133
40010	\$31.47	± 2-1/2°	OE Style Offset Camber/Caster Bushing	133
40011	\$31.47	± 2-3/4°	OE Style Offset Camber/Caster Bushing	133
40360	\$19.73	± 1°	Radius Arm Caster Adjusting Bushings	133
40372	\$87.17	± 2°	Polyurethane Caster C-Bushings	133
40374	\$87.17	± 4°	Polyurethane Caster C-Bushings	133
40377	\$89.35	± 7°	Polyurethane Caster C-Bushings	133
43201	\$40.48	± 1/4°	Fully Adjustable Camber/Caster Bushing	133
43202	\$40.48	± 1/2°	Fully Adjustable Camber/Caster Bushing	133
43203	\$40.48	± 7/8°	Fully Adjustable Camber/Caster Bushing	133
43204	\$40.48	± 1-1/4°	Fully Adjustable Camber/Caster Bushing	133
43205	\$40.48	± 1-5/8°	Fully Adjustable Camber/Caster Bushing	133
43206	\$40.48	± 2°	Fully Adjustable Camber/Caster Bushing	133
43207	\$40.48	± 2-3/8°	Fully Adjustable Camber/Caster Bushing	133
43208	\$40.48	± 2-3/4°	Fully Adjustable Camber/Caster Bushing	133
43501	\$40.48	3/8°	Fully Adjustable Camber/Caster Bushing	133
43502	\$40.48	3/4°	Fully Adjustable Camber/Caster Bushing	133
43503	\$40.48	1-1/8°	Fully Adjustable Camber/Caster Bushing	133
43504	\$40.48	1-1/2°	Fully Adjustable Camber/Caster Bushing	133
43505	\$40.48	2°	Fully Adjustable Camber/Caster Bushing	133
43506	\$40.48	2-3/8°	Fully Adjustable Camber/Caster Bushing	133
43507	\$40.48	2-3/4°	Fully Adjustable Camber/Caster Bushing	133
43508	\$40.48	3-1/8°	Fully Adjustable Camber/Caster Bushing	133
53200	\$42.18	3/4" to 2-3/4"	Fully Adjustable Camber/Caster Bushing	134

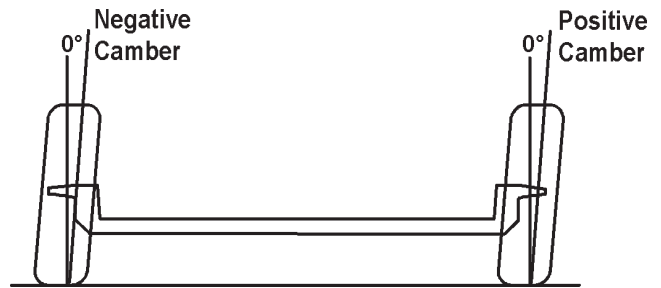
Ingalls Part #	List Price	Adjustment Range	Description Number	Page
53500	\$42.18	3/4° to 2-3/4°	Fully Adjustable Camber/Caster Bushing	134
54300	\$57.32	0° to 2-1/4°	Fully Adjustable Camber Bushing	134
59400	\$42.18	3/4° to 2-1/2°	Fully Adjustable Camber/Caster Bushing	134
60000	\$155.97	± 1-1/2°	Camber Adjusting Lower Kingpin	134
61000	\$140.15	± 2-1/2°	Camber/Caster Adjusting Upper Ball Joint	135
70100	\$38.51	—	Bulk Hendrickson adjusting kit	135
70200	\$40.21	—	Wilson Tandem Shim 3/32	135
70201	\$42.66	—	Wilson Tandem Shim 1/16	135
70202	\$45.11	—	Wilson Tandem Shim 1/8	135
70210	\$13.47	—	Petrblt Adj Shim 1/32	135
70211	\$14.49	—	Peterbilt shim 1/16	135
70212	\$16.12	—	Peterbilt Adj Shim 1/8	135
70215	\$14.86	—	Freightliner Shim 1/32"	135
70216	\$16.63	—	Freightliner Shim 1/16"	135
70217	\$18.08	—	Freightliner Shim 1/8"	135
70220	\$14.29	—	Freightliner Shim 1/32"	135
70221	\$16.74	—	Freightliner Shim 1/16"	135
70222	\$17.96	—	Freightliner Shim 1/8"	135
70225	\$47.76	—	Freightliner 1/32"	135
70226	\$50.62	—	Freightliner Shim 1/16"	135
70227	\$53.48	—	Freightliner Shim 1/8"	135
70230	\$43.47	—	Volvo/White Shim 1/32"	135
70231	\$44.70	—	Volvo/White Shim 1/16"	135
70232	\$48.78	—	Volvo/White Shim 1/8"	135
70235	\$42.66	—	Freightliner Shim 1/32"	135
70236	\$45.31	—	Freightliner Shim 1/16"	135
70237	\$49.39	—	Freightliner Shim 1/8"	135
70240	\$42.15	—	IHC Torque Arm Shim 1/32"	136
70241	\$44.65	—	IHC Torque Arm Shim 1/16"	136
70242	\$48.70	—	IHC Torque Arm Shim 1/8"	136
70243	\$32.25	—	Kenworth Spacer 1/32"	136
70244	\$33.47	—	Kenworth Spacer 1/16"	136
70245	\$39.19	—	Kenworth Spacer 1/8"	136
70246	\$43.07	—	Kenworth Spacer 1/4"	136
70247	\$48.98	—	Kenworth Spacer 1/2"	136
70248	\$54.09	—	Kenworth Spacer 3/4"	136
70249	\$60.41	—	Kenworth Spacer 1"	136
70250	\$51.86	—	Tandem Shims	136
70251	\$53.43	—	Tandem Shims	136
70252	\$56.35	—	Tandem Shims	136
70255	\$51.50	—	Int. Torque Arm Shims	136
70256	\$54.46	—	Int. Torque Arm Shims	136
70257	\$57.66	—	Int. Torque Arm Shims	136
70260	\$18.52	—	Vanhool Shim	136
70261	\$20.39	—	Vanhool Shim	136
70262	\$22.42	—	Vanhool Shim	136
70265	\$18.52	—	Vanhool Shim	136
70266	\$20.39	—	Vanhool Shim	136
70267	\$22.42	—	Vanhool Shim	136
70270	\$399.99	—	Prevost Caster Shims	136
70271	\$42.30	—	Prevost Caster Shims	136
70272	\$47.17	—	Prevost Caster Shims	136
70275	\$23.00	—	Prevost Caster Shims	136
70276	\$25.43	—	Prevost Caster Shims	136
70277	\$27.98	—	Prevost Caster Shims	136
70280	\$39.99	—	Prevost Shims	136
70281	\$42.30	—	Prevost Shims	136
70282	\$47.17	—	Prevost Shims	136
81250	\$39.97	± 2°	Fastcam™ 14mm Camber Adjusting Bolts	137
81260	\$39.97	± 2°	Fastcam™ 14mm Camber Adjusting Bolts	137
81270	\$44.18	± 2°	Fastcam™ 15mm Camber Adjusting Bolt	137
81280	\$44.18	± 2°	Fastcam™ 16mm Camber Adjusting Bolts	137
81290	\$44.18	± 2°	Fastcam™ 17mm Camber Adjusting Bolt	137
81310	\$48.20	± 1°	See 29100 Description	110
84000	\$121.68	—	Honda Rear Sway Bar Links	137
84200	\$58.51	—	OE Replacement Ball Joint	137
84210	\$58.51	—	OE Replacement Ball Joint	—
84215	tba	—	OE Style Replacement Ball Joint	137
84217	tba	—	Roll Center Correction Ball joint	137
84300	\$52.73	—	Polyurethane Strut Rod Bushings	138
84302	\$61.46	—	Polyurethane Strut Rod Bushings	138
84304	\$61.46	—	Polyurethane Strut Rod Bushings	138
84308	\$34.44	—	Polyurethane Track Arm Bushings	138
84315	\$35.84	—	Polyurethane Track Arm Bushings	138
84950	\$32.42	—	Replacement Steering Coupler	139
84951	\$38.51	—	Replacement Steering Coupler	139
84952	\$33.44	—	Replacement Steering Coupler	139
84953	\$38.51	—	Replacement Steering Coupler	139
84954	\$42.86	—	Replacement Steering Coupler	139
84960	\$24.76	—	Radius Arm/Strut Rod Tensioner	139
84979	\$89.60	—	Replacement Track Arm Bolt	140
87310	\$53.23	± 2-1/4°	Camber/Caster Adjusting Washers (4)	—
87385	\$77.55	± 2-1/4°	Camber/Caster Adjusting Bolts (4 bolts)	140
87400	\$69.29	± 2-1/4°	Camber/Caster Adjusting Bolts (4 bolts)	140
87500	\$76.05	± 2-1/4°	Camber/Caster Adjusting Bolts (4 bolts)	140
90200	\$305.99	Tool	Ball Joint Press	141
90360	\$2,424.85	Tool	Camber Correcting Axle Bender	141
91051	\$166.65	Tool	—	141
91052	\$166.65	Tool	—	141
91053	\$80.96	Tool	—	141
91054	\$191.52	Tool	—	141
91055	\$121.44	Tool	—	141
91056	\$76.54	Tool	—	141
91057	\$131.82	Tool	—	141
91058	\$76.54	Tool	—	141
91059	\$96.41	Tool	—	141

Ingalls Part #	List Price	Adjustment Range	Description Number	Page
91060	\$101.44	Tool	—	142
91061	\$33.61	Tool	—	142
91062	\$47.39	Tool	—	142
91063	\$22.35	Tool	—	142
91064	\$59.84	Tool	—	142
91065	\$40.68	Tool	—	142
91066	\$45.28	Tool	—	142
91067	\$45.28	Tool	—	142
91068	\$86.23	Tool	—	142
91069	\$134.37	Tool	—	142
91072	\$101.37	Tool	—	142
92010	\$49.43	Tool	—	142
92015	\$51.07	Tool	—	142
92020	\$49.43	Tool	—	142
92030	\$27.05	Tool	—	142
92040	\$27.05	Tool	—	142
92050	\$50.91	Tool	—	143
92060	\$50.91	Tool	—	143
92080	\$55.18	Tool	—	143
92288	\$102.82	Tool	Knock Out Plug Remover	143
92300	\$152.99	Tool	—	143
92530	\$90.40	Tool	Camber/Caster Sleeve Puller	143
92532	\$34.23	Tool	Ball Joint Thread Protector	143
92600	\$262.78	Tool	—	143
92610	\$49.93	Tool	—	144
92615	\$61.21	Tool	—	144
92620	\$79.19	Tool	Camber/Caster Upper Arm Adjusting Wrench	144
92625	\$79.19	Tool	Camber/Caster Upper Arm Adjusting Wrench	144
92630	\$79.19	Tool	Camber/Caster Upper Arm Adjusting Wrench	144
92635	\$104.69	Tool	—	144
92640	\$80.38	Tool	—	144
92650	\$155.22	Tool	Camber/Caster Upper Arm Adjusting Wrench	144
92655	\$72.12	Tool	Sleeve Adjusting Tool	144
92660	\$86.51	Tool	Tie Rod End Adjusting Tool	144
92665	\$67.83	Tool	—	—
92670	\$124.27	Tool	—	—
92895	\$34.27	Tool	Spot Weld Cutter	144
92900	\$34.27	Tool	3/8" Spot Weld Cutter	145
92970	\$104.18	Tool	—	145
92979	\$34.20	Tool	Threaded Bushing Extractor and Installer	145
93000	\$340.07	—	The Stiffy™ ETD	145
93020	\$340.07	—	The Stiffy™ ETD	145
93021	\$340.07	—	The Stiffy™ ETD	145
93022	\$340.07	—	The Stiffy™ ETD	145
93023	\$340.07	—	The Stiffy™ ETD	145
93024	\$340.07	—	The Stiffy™ ETD	145
93025	\$340.07	—	The Stiffy™ ETD	145
93026	\$340.07	—	The Stiffy™ ETD	145
93027	\$340.07	—	The Stiffy™ ETD	145
93028	tba	—	The Stiffy™ ETD	145
93030	\$340.07	—	The Stiffy™ ETD	145
93031	\$406.12	—	The Stiffy™ ETD	145
93032	tba	—	The Stiffy™ ETD	145
93040	\$340.06	—	The Stiffy™ ETD	145
93041	tba	—	The Stiffy™ ETD	145
93130	\$306.05	—	Universal Stiffy - No Brackets	—
93180	\$222.47	—	Rubber Bushing PowerStick™ ETD	145
93181	\$222.47	—	Polyurethane Bushing PowerStick™ ETD	145
93200	tba	—	Front and Rear Sway Bars	—
93300	\$304.12	—	Rear Shock Tower Brace	146
93301	\$508.21	—	Front Strut Tower Brace	146
93302	\$181.65	—	Lower Cradle Brace	146
93304	\$304.12	—	Rear Shock Tower Brace	146
93305	\$814.37	—	Rear Traction Kit (Panhard Bar & Rear Arms)	146
93306	\$406.17	—	Adjustable Rear Pan Hard Bar	146

Basic Alignment Terms

Camber Definition

Camber is the inward or outward tilt of the top of the tire/wheel assembly from true vertical. If the top of the tire/wheel assembly is Tilted Inward, it has a Negative Camber. If the top of the tire/wheel assembly is Tilted Outward, it has a Positive Camber. If the tire/wheel assembly is straight up and down on a true vertical line, the Camber is measured at Zero (0°).



Effects of Positive Camber

Slight positive camber results in a dynamic loading that allows the tire to run relatively flat against the road surface. Positive camber also directs the weight and shock load of the vehicle on the larger inner wheel bearing and inboard portion of the spindle rather than the outboard bearing. Positive camber in moderation results in longer bearing life, less likely sudden load failure, and as a side benefit, easier steering. Excessive positive camber wears the outside of the tire and can cause wear to suspension parts such as wheel bearings and spindles.

Effects of Negative Camber

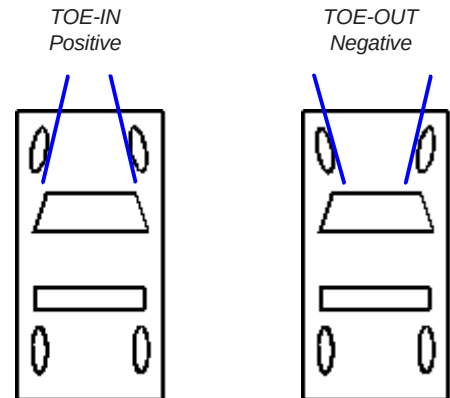
Variations in negative camber can be used to improve the handling of a vehicle. A setting of 1/2° negative on both sides will improve cornering without affecting tire life greatly. This negative setting compensates for the slight positive camber change of the outside tire due to vehicle roll, thereby allowing a flatter tire contact patch during cornering. Excessive negative camber wears the inside of the tire; and similar to positive camber, it can cause wear and stress on suspension parts.

Causes of Camber Changes

Always consult a ride height specification book prior to beginning alignment. If out of specification, attempt to correct. Changes in ride height from factory specifications affect camber. As a vehicle ages, the suspension has a tendency to sag. The weight of the vehicle can cause springs to weaken. Springs can also be damaged by excessive vehicle loading or abuse. Another factor to consider is sagging of a center support or crossmember. Modifications to the vehicle, such as raising or lowering the suspension or changing the total weight of the vehicle, often affect camber.

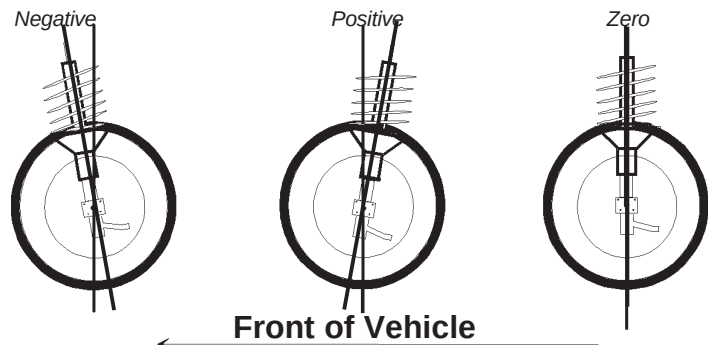
Toe Definition

Toe relates to the difference in the distance between the front of the tires and the rear of the tires on the same axle, or to the vehicle centerline. Toe-in, or positive toe, is defined as the front of the tires being closer together than the rear of the tires. Toe-out, or negative toe, is when the rear of the tires are closer together than the front of the tires. Zero toe is when the tires are parallel to each other.



Caster Definition

Caster can be defined as the forward or rearward tilt of the projected steering axis from true vertical, as viewed from the side. This line is formed by extending a line through the upper and lower steering knuckle pivot points. For vehicles with front control arms, visualize the line extending through the upper and lower ball joints. On strut equipped vehicles, the line extends through the lower ball joint to the center of the upper strut mount. Caster is always viewed from the side of the vehicle. When the upper pivot point is rearward of the lower pivot point, caster is positive. If the upper pivot is forward of the lower pivot point, caster is negative. When the two points are straight up and down from each other, the caster is zero. A maximum side to side variation of $\pm 5^\circ$ is recommended on most vehicles. Caster is NOT a normal tire wearing angle and is used as a directional control for stability and steering returnability.



Ingalls



*Ingalls Engineering
Performance Suspension
Components*

**2011 Cherry Street Suite 104
Louisville CO 80027
303-665-7800
fax 303-665-7810
800-641-9795
www.ingallseng.com**

